

LG Inverter Single Package Solution Tropical





WHY LG INVERTER

SUPERIOR EFFICIENCY

Annual Energy Savings

Target low pressure will be adjusted according to cooling load. LG provides energy saving by preventing On / Off operation with inverter technology

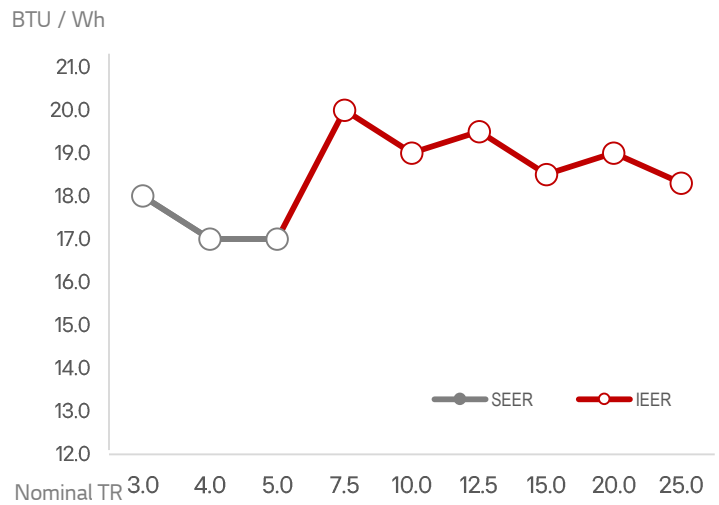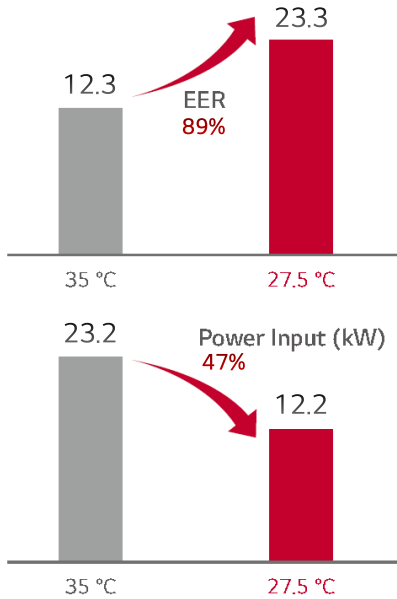

*SEER : Seasonal Energy Efficiency Ratio (Btu/Wh)
 *IEER : Regulated Energy Efficiency Ratio (Btu/Wh)

※ Model : AK-W320LH00



Electricity Cost Saving

The inverter compressor can remove wasted energy by responding to time-specific loads, situation-specific loads, and seasonal load fluctuations



CONVENTIONAL

INVERTER COMPRESSOR

High-Cooling Load
 Summer Season
 Large Visitors

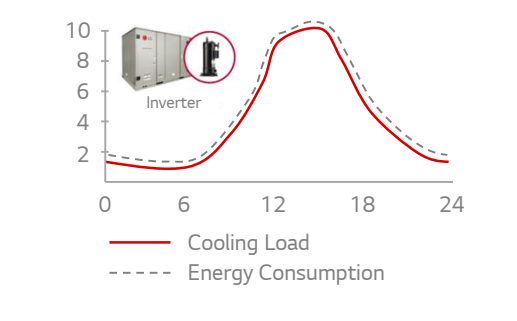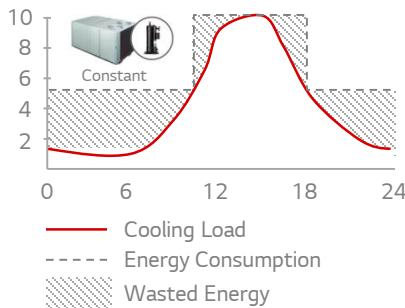

Low-Cooling Load
 Other Season
 Small Visitors

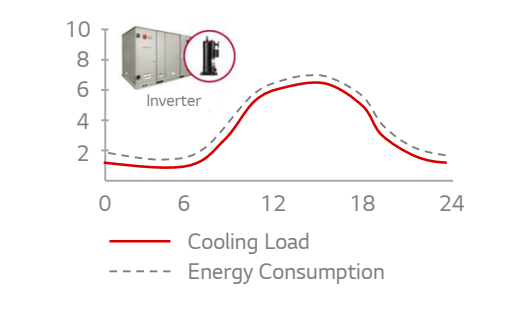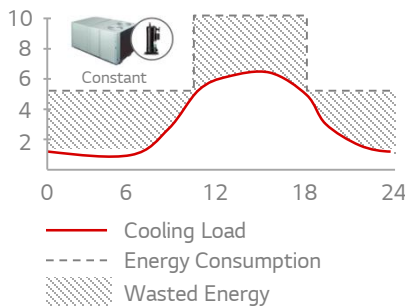

CONVENIENCE

DIRECT DRIVE PACKAGE

Heat Pump Only

Easy Installation

By applying a high static pressure motor, it has wide E.S.P coverage and easy to set the air volume setting RPM by simple touch on remote Control to change airflow rate

Easy Maintenance


Beltless direct drive system both side of indoor and outdoor is easy to maintain and cost effective

EASY E.S.P. CONTROL



Easy Air Volume Adjustment

External Static Pressure




DIRECT DRIVE MOTOR



- ✓ Variable Speed Plug Fan
- ✓ Does not Require Additional VFD
- ✓ No Need to Adjust Pulley and Belt
- ✓ No Need to Grease
- ✓ Low Cost of Repair with Fewer Parts

3rd PARTY BMS SYSTEM COMPATIBILITY

LG Inverter Single Package can be connected with gateway products for different protocols such as Modbus, BACnet and LonWorks. And gateway product offers self diagnosis interface

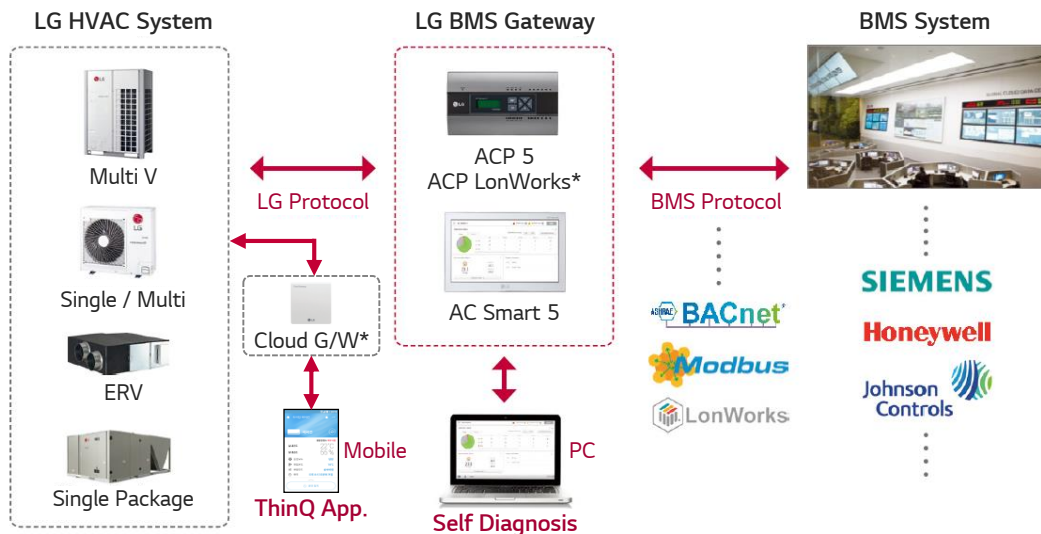

*ACP 5 (BACnet IP/Modbus TCP) : PACP5A000 / ACP LonWorks (Modbus) Interface : PLNWKB000
 Cloud Gateway : PWFMD200


SINGLE PACKAGE

LINE-UP (Inverter)

Cooling Only Indoor/Outdoor : BLDC Motor* Direct Drive

Type	Phase	Power Supply	Capacity Index (RT)		
			3	4	5
C/O	1Ø	220-240V 50/60Hz	 (1,280x1,065x1,110)		

Cooling & Heating Indoor/Outdoor : BLDC Motor* Direct Drive

Type	Phase	Power Supply	Capacity Index (RT)						
			6.5	7.5	10	12.5	15	17.5	20
C/O	3Ø	380-415V 50/60Hz							
Black Fin (Condenser)									

*BLDC Motor: Brushless Direct Current Motor

NEW

CONVENIENCE

- Direct drive fan motor (BLDC)
- Easy set-up method (by ESP function)



NEW


EASY ACCESS

- Hinged doors made it easy to service components
- 3rd party compatible 2 inch filter

NEW

ULTIMATE PERFORMANCE

- Superior efficient ultimate inverter compressor with BLDC fan motors

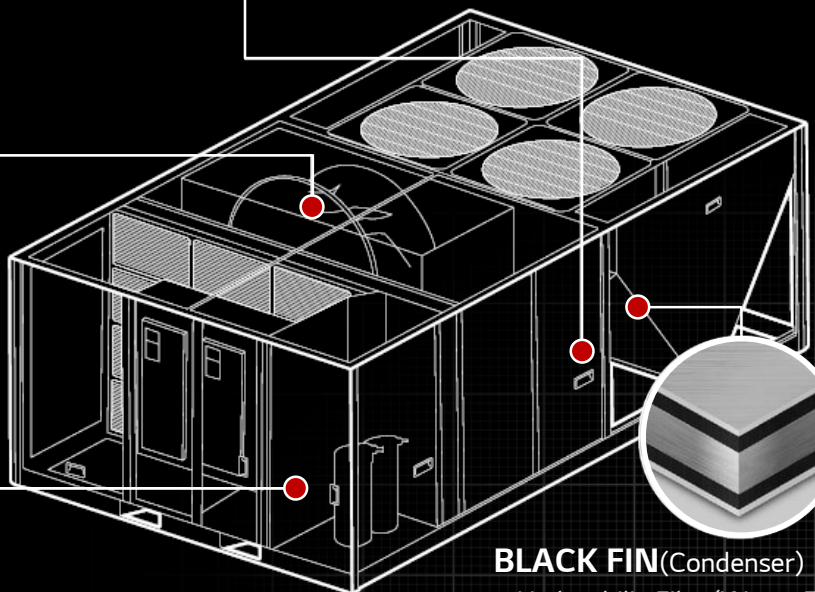

BLACK FIN(Condenser)

- Hydrophilic Film (Water Flow)
- Corrosion Resistant Layer

SINGLE PACKAGE

LINE-UP (Non-Inverter)





Cooling Only

(W x H x D, mm)

Small Capacity




Direct Drive

Belt Drive

Type	Phase	Power Supply	Capacity Index (RT)					
			4	5	6	7.5	10	
C/O	1Ø	220-240V 50/60Hz	 (1,790x1,049x1,024)	 (1,790x1,160x1,024)	 (2,028 x1,160x1,024)	 (2,265x1,383x1,505)		

Mid-Size Capacity

Belt Drive

Type	Phase	Power Supply	Capacity Index (RT)					
			12.5	15	18	20	25	
C/O	3Ø	380-415V 50Hz	 (2,092x1,520x2,030)	 (2,548x1,755x2,150)	 (3,312x2,100x2,150)			

Large Capacity

Belt Drive

Type	Phase	Power Supply	Capacity Index (RT)		
			30	35	40
C/O	3Ø	380-415V 50Hz	 (3,945x2,150x2,400)		





LG Electronics

<http://lge.com/ae>
<http://partner.lge.com>



Distribute by :