



MULTI V™

MULTI V™

LG AIR SOLUTION



LG Service Centre

991D Alexandra Road #01-14 to 19, Singapore 119972
Tel: 6512 0555
Operating Hours: Mon-Fri: 8.30am-6.00pm,
Sat: 8.30am-2.00pm
(Closed on Sundays and Public Holidays)


LG Electronics Singapore Pte Ltd

8 Temasek Boulevard, #27-01 Suntec Tower 3,
Singapore 038988
Tel: 6333 6092 Fax: 6337 6151

www.lg.com/sg
www.lg.com/sg/business

SN : ASMVCA000923
Copyright © 2024 LG Electronics. All rights reserved.

Distributed by

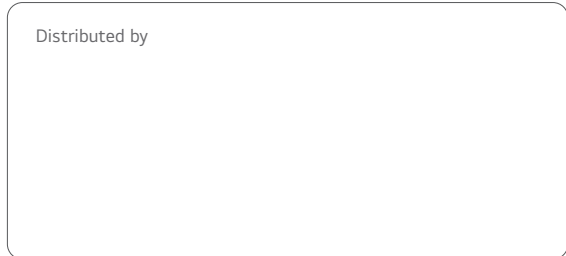

INDEX



OUTDOOR
UNITS

024

MULTI V i	026
MULTI V S	060

158 HOT WATER
SOLUTION

HYDRO KIT	160
COMPATIBILITY & FEATURE FUNCTIONS	166



CONTROL
SOLUTIONS

170

INDIVIDUAL CONTROL	176
CENTRALIZED CONTROL	188
INTEGRATION DEVICE	210
PROPOSAL CASE	230



072

WALL MOUNTED	074
CEILING MOUNTED CASSETTE	086
CEILING MOUNTED ROUND CASSETTE	108
CEILING CONCEALED DUCT	112
FRESH AIR INTAKE	124
CEILING & FLOOR CONVERTIBLE CEILING SUSPENDED	126
CONSOLE & FLOOR STANDING	132
FLOOR STANDING (PAC)	139

INDOOR
UNITS



VENTILATION
SOLUTIONS



142

ERV	144
ERV WITH DX COIL	152
RESIDENTIAL ERV	154

ACCESSORIES

236

MECHANICAL ACCESSORIES	238
PIPING ACCESSORIES	248



MARKET TREND IN ASIA

Energy efficient HVAC systems are required to reduce energy consumption to meet stricter energy regulations on buildings.




Necessity of Energy Saving

- Electricity prices are constantly rising
- Cooling is also estimated to account for almost 30% of its peak electricity demand by 2040.

Growing demand for energy-efficient solutions

Electricity demand for ASEAN residential end uses

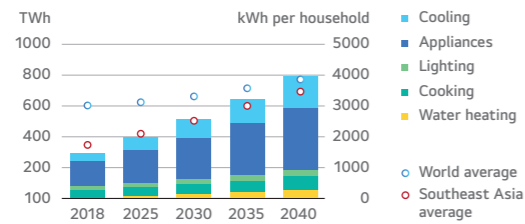

Source : IEA.org (Roadmap for Energy-Efficient Buildings and Construction in ASEAN)




Climate Neutrality

- By 2030, countries must cut carbon dioxide emissions by 45% in order to keep warming to 1.5 degrees as compared to 2010 levels.
- Global carbon dioxide emissions need to reach net-zero emissions by 2050.

The demand of environmentally friendly HVAC units is expected to rise for reducing carbon footprint

Asia's Race to Net-Zero by 2030

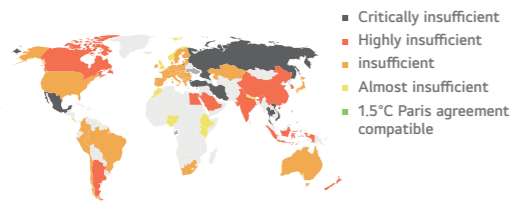

<https://climateactiontracker.org/countries/>



Advances in Technology


- Smart HVAC technologies became increasingly popular in building automation.
- HVAC technologies integrated with IoT are in high demand in the smart homes industry.

Growing demand for smart solutions in HVAC



MULTI V BRAND HISTORY

MULTI V is recognized for its technology and innovativeness.

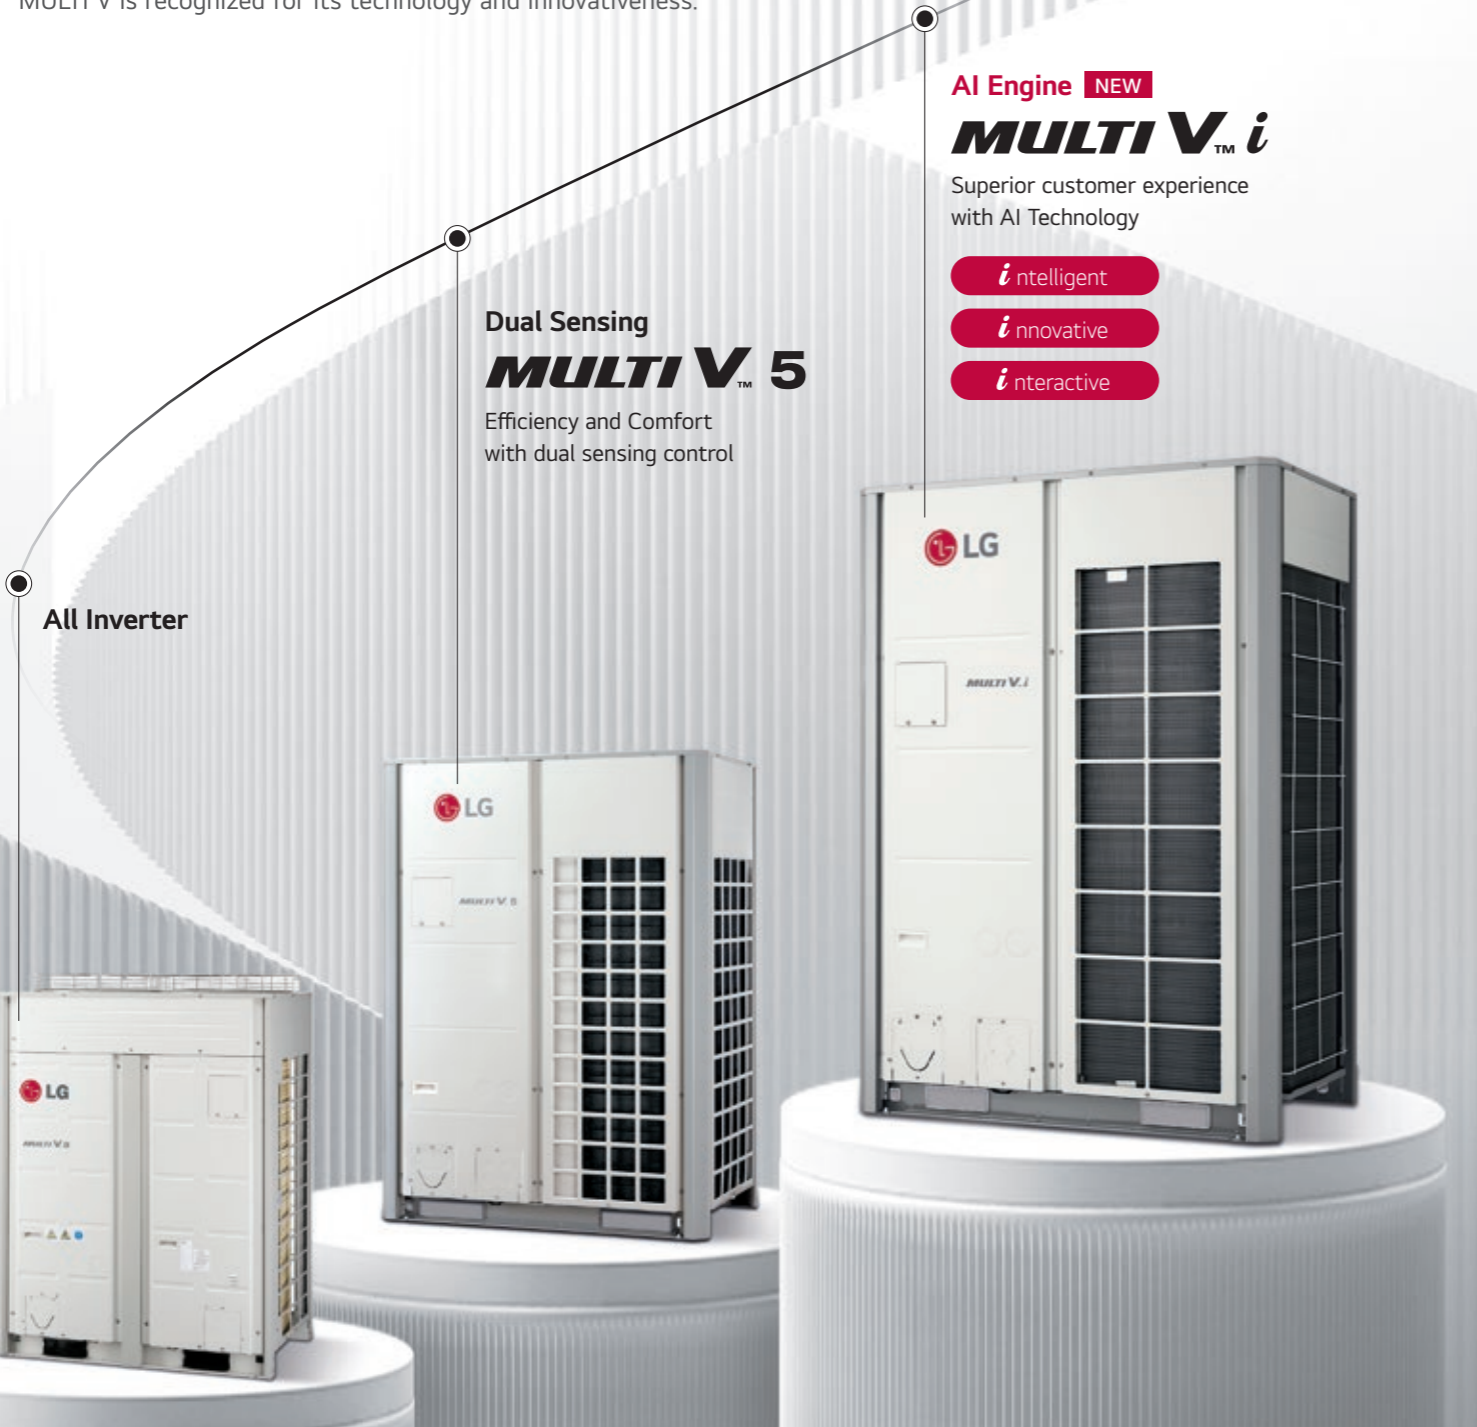

AI Engine NEW
MULTI V™ i

Superior customer experience with AI Technology

- intelligent
- innovative
- interactive

Dual Sensing
MULTI V™ 5

Efficiency and Comfort with dual sensing control

All Inverter

HISTORY OF MULTI V LEADERSHIP

2013
MULTI V™ IV

- Active Refrigerant Control
- Variable Heat Exchanger Circuit
- Smart Load Control
- Smart Oil Return
- Vapor Injection (Advanced)

2017
MULTI V™ 5

- Dual Sensing Control
- Ultimate Inverter Compressor
- Large Capacity ODU with Biomimetic Technology Fan
- Continuous Heating
- Ocean Black Fin

2023
MULTI V™ i

- Energy Saving with AI engine
- Corrosion Resistance Exterior
- Smart Diagnosis Reporting
- Remote Upgrade System
- Weather Reference Operation

INFRASTRUCTURE IN ASIA





LG Singapore Air Conditioning Academy

LG Singapore Air Conditioning Academy is used for training and display purposes. The Academy showcase a variety of current Air Conditioner models and home appliances.



LG Whisen Park

LG Whisen Park in Changwon, Korea offers an exhibition space that visitors can explore a wide range of exhibits to learn more about LG HVAC solutions for both commercial and residential appliances.

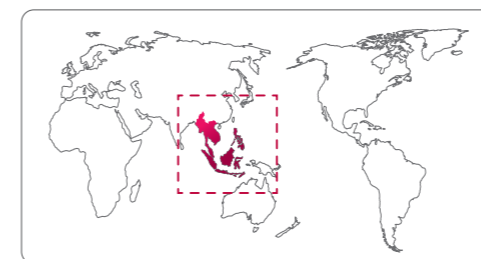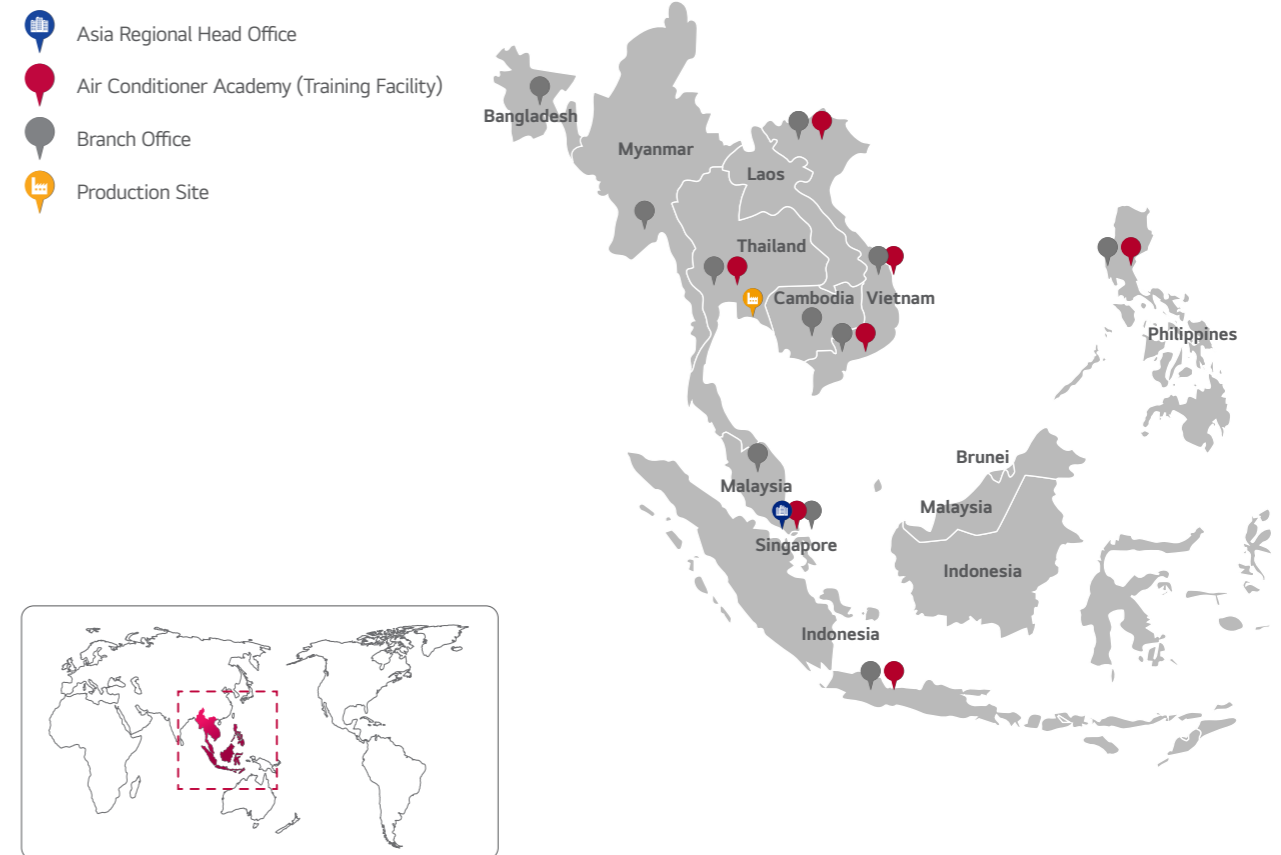

ENGINEERING TOOLS & SUPPORT

From planning to design, installation, service & maintenance and retrofit, an architectural project goes through many stages. Various engineering tools are applied to solve the diverse issues in each stage, providing the most optimal solution. Given the usage of such tools, buildings are effectively designed, built, supervised, and maintained throughout their lifecycle. LG is dedicated to provide the best HVAC engineering support, we offers HVAC system engineering tools and solutions focused on the overall lifecycle of a building. The LATS* Program has been developed to offer the best solution for LG HVAC systems, providing customers with a solution that allows accurate model selection and energy estimations.

* LATS : LG Air-conditioner Technical Solution

01 Model Selection

LATS HVAC

An integrated model selection program, enables accurate and quick selection on the best model suitable for each site. By providing detailed information on refrigerant piping and control design, error can be minimized.

- Various LG HVAC product design (MULTI V, MULTI, Single, ERV, AHU, DOAS and Central Controller)
- Calculate the diameter and length of refrigerant pipes
- Design guide easily obtained
- Simulate capacity and power input based on design condition
- Calculate the amount of additional refrigerant
- Provide engineering data in various formats such as report, submittal and equipment list




02 Design

LATS CAD (2D Drawing)

Easy, quick and accurate add-in design program for AutoCAD* or ZWCAD*.

- Selection for outdoor unit, indoor unit, accessories and controllers
- Design ref-pipe, control line and drain pipe
- Calculate the diameter and length of pipes and drains
- Check pipe rules
- Simulate capacity and power input based on design condition
- Calculate the amount of additional refrigerant
- Output of equipment schedules and reports
- Project information sharing with LATS HVAC

※ AutoCAD / ZWCAD program is required.



LATS REVIT / REVIT Family (3D Drawing)

An add-in program that provides a range of functions for designing LGE VRF in Autodesk Revit* for Building Information Modeling (BIM). The Revit family of LGE products features realistic shapes and specifications, making it easy for consultants and engineers to design and plan HVAC systems.

※ AutoCAD REVIT program is required.



03 LATS LCC (Life Cycle Cost estimation)

LATS LCC simulates annual energy usage amount and life cycle cost based on whole year weather data and product performance data.

- Alternative system's Life Cycle Cost simulation
- Detail LCC analysis function
- Improved user input function (User can input details directly)



04 Mobile Application & Website

LG Energy Payback Application

Payback application provides a comparison of the payback period and Low Cycle Cost of LG inverter products.

- Life Cycle Cost comparison proposal for Each HVAC System
- Payback calculation of RAC/CAC products



CAC Partner Application

Partner application provides technical and marketing materials for each model and various utility functions.

- Search and download technical and marketing materials
- Refrigerant amount calculation, and error code search function, and etc.



B2B Partner Portal

B2B partner portal provides technical data, and various utilities, case studies and model.

- Search and download of PDB, catalogue, proposals, CAD files, and etc.
- Provides various case studies for each segment




05 Environment Simulation

CFD Analysis

CFD analysis can review potential issues and provide optimal solution.

- Outdoor airflow analysis : Operability check
- Indoor airflow analysis : Airflow distribution
- Outdoor noise analysis : Environmental noise impact pre-study

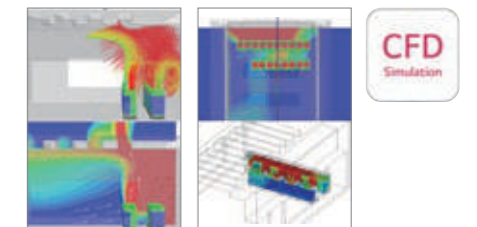

BENEFITS OF LG MULTI V

Benefits for Building Owners



Efficient Management & Cost Reduction

- Fault Detection Diagnosis enables easy maintenance.
- Saves space, time, and installation costs.
- Cooling operation provides stable and powerful cooling condition in extreme environment.



Reliability at Every Stage

- Ultimate Inverter Compressor developed and manufactured in Korea.
- Corrosion resistant Black Fin & Panel for harsh conditions operation.



Customized Comfort and Solution

- Preset monthly energy usage and consume power according to the target that has been set.



Benefits for Developers & Construction Companies



Green Solutions

- More environment friendly system & higher energy efficiency with lesser carbon emission.



Maximizing Space Utilization

- Large capacity in compact size enhances space utilization.



Smart Building Solutions

- Seamless integration with current Building Management Systems.
- User friendly interface, flexible interlocking environment, energy management, smart individual controller for optimized controlling conditions, and smart building management.
- Logic optimized control system for the site.



Benefits for Consultants



Versatile Solutions

- Air-cooled, Water-cooled, Heating, ERV, and Air Handling Unit interlocking solutions.



Professional Design Support

- LATS (LG Air-conditioner Technical Solution) for draft energy estimation, model selection, HVAC design and 3D designing.
- CFD Analysis to ensure suitable solutions and prevent malfunctions.
- Energy simulation offered to find the optimal solution.



Optimized Convenience with HVAC Design

- Customization provides more options for customers.
- Reduce noise level for outdoor unit using noise level function.



Benefits for End-users



Cost Saving Operation

- High efficiency.
- AI Energy management prevent overuse of the HVAC system operational costs.



Comfort Cooling & Heating

- AI technology in Multi V i provides learning algorithms.
- Automatic operation checks for ambient weather provides comfort and pleasant environment.



Convenient Functions

- Low-noise operation.



APPLICATION SOLUTIONS

Office

Supporting efficiency with flexibility

High Rise Office Building



- MULTI V i
- High Static Duct
- DX AHU
- ACP 5
- PDI**

Small to Medium Sized Office Building



- MULTI V i / S
- Dual Vane 4 Way CST* / 4 Way CST*
- ERV

The MULTI V series revitalizes the space using LG's intelligent control solutions to provide cool and fresh air at all times.

Commercial

Maximizing business, minimizing cost

Shopping Mall



- MULTI V i
- DX AHU
- Duct

Retail



- MULTI V i
- ERV
- Convertible
- Duct

Quick Service Restaurant (QSR)



- ERV
- Hydro Kit
- 4 Way CST* / Duct

The highly efficient, energy saving MULTI V Series reduces operation costs to suit any purpose and any interior, helping your business reduce expenses.

* CST : Cassette ** PDI : Power Distribution Indicator

Residential

Creating a comfortable home

Condominium & Apartments



- MULTI V S
- Hydro Kit
- ACS 5
- 1/2 Way CST
- Duct

Bungalow & Villa




- MULTI V S
- Therma V
- ESS*

Compact size and high static pressure of MULTI V S enables optimal space solution, providing comfort to every space through individual zone control and hot water solution.

Hotel

Meeting diverse needs

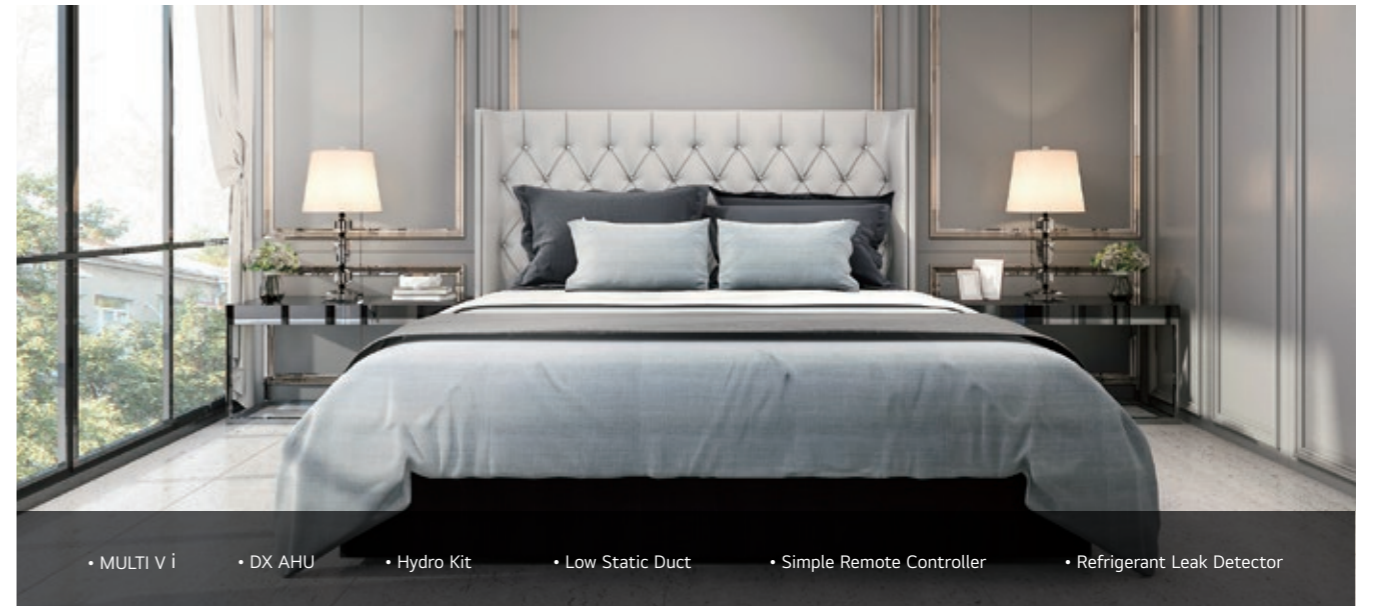


- MULTI V i
- DX AHU
- Hydro Kit
- Low Static Duct
- Simple Remote Controller
- Refrigerant Leak Detector

The variety of applications that MULTI V Series offers represents a perfect opportunity for sophisticated hotel business.

* ESS : Energy Storage System


Interlocking Operation with ERV

LG ERV DX with humidification function interlock operation is a solution for humidifying and ventilating the indoor while communicating with other IDUs and the ODU. They provide improved comfort conditions considering the indoor conditions without additional facility installation.

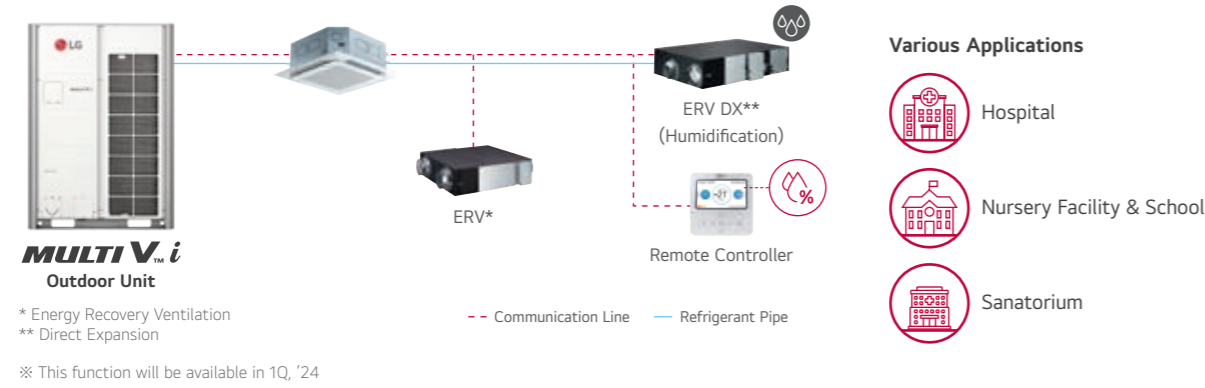


Air Handling Unit (AHU) Solution

AHU solution is use for cooling and heating in large spaces. LG AHU Comm. Kit (for both return air / supply air control) connected to the DX coil of the AHU, LG VRF system can be applied to deliver conditioned air.

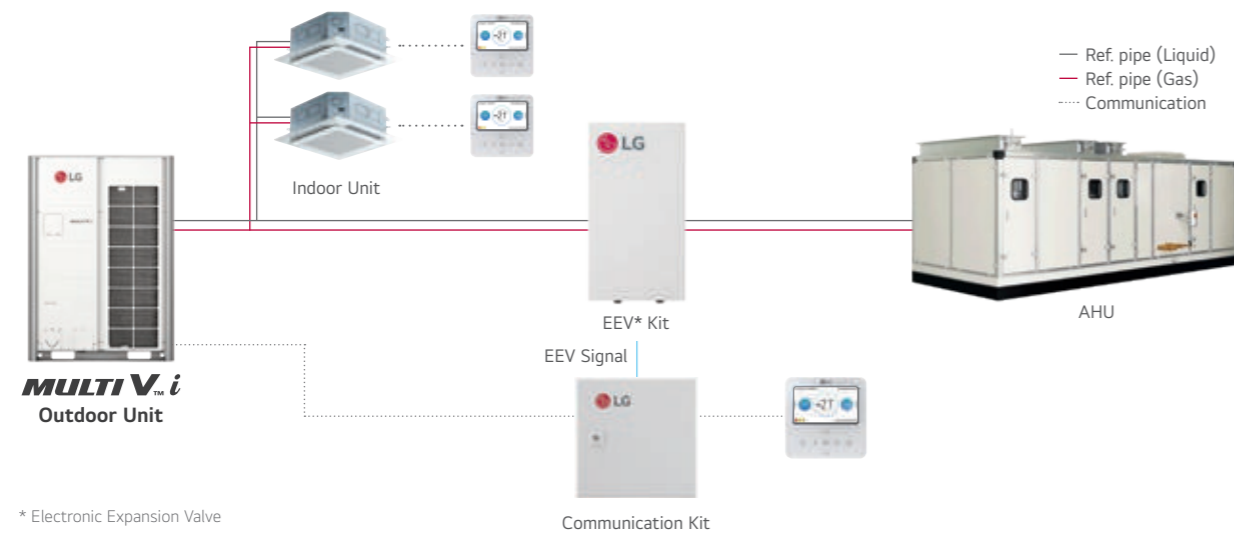


Refrigerant Leak Detection Solution

LG leakage detector keeps the indoor space safe and guarantees the customer's peace of mind.

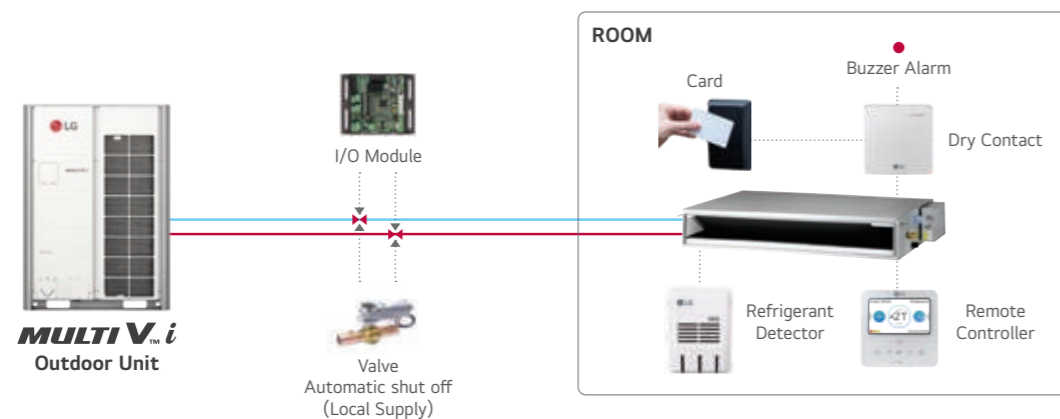


Power Consumption Distribution Solution

In the case of shared power consumption in a building, a solution might be necessary to distribute the power consumption amount per tenant. Electricity charges can be billed to each tenant by using LG Power Distributor Indicator (PDI). If the PDI is used in conjunction with an LG central controller, the results can be exported in excel format.

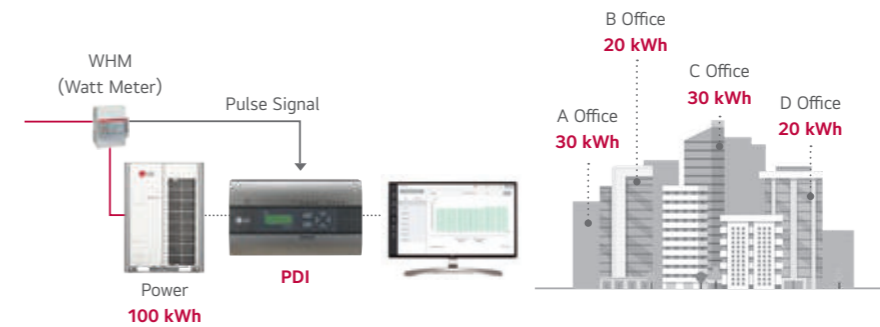

Total Control via Any Device

The LG central controller can be accessed from any web browser that supports HTML5. Building administrators is able to control the systems from wherever they are.

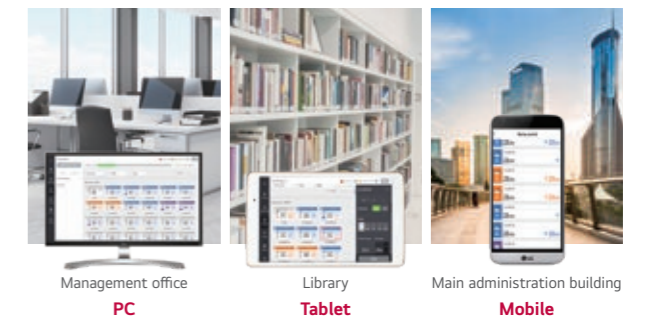

Hot Water Solution


MULTI V i with Hydro kit provides floor heating and hot water supply as well as space heating & cooling. It is a more environmental friendly system with higher energy efficiency and lesser carbon emission.



* MT = Medium temp. 50°C LWT
** HT = High temp. 80°C LWT


Energy Management Solution

Energy navigation function allows LG MULTI V i to preset monthly energy usage and consume what has been previously planned. By comparing and analyzing previous consumption and planned energy usage for the month, overuse of the HVAC system operational costs can be prevented with central controller.

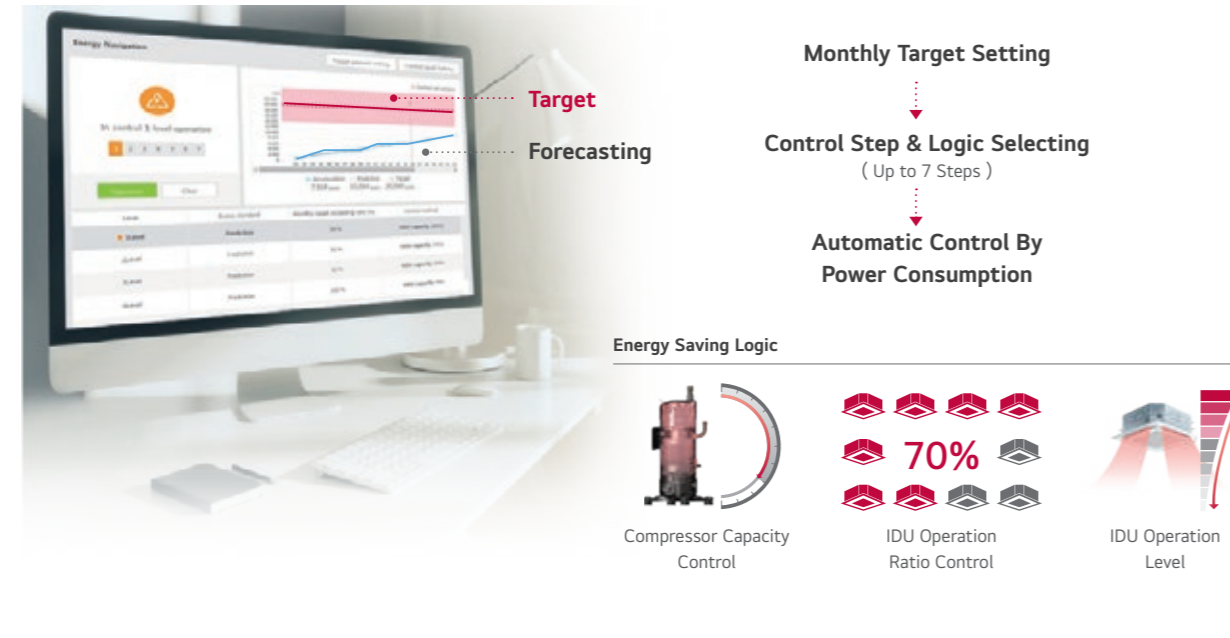


Integration Solution with BMS

There are many BMS protocols used for the control of buildings' systems such as HVAC, lighting, power and security. LG has a wide range of gateway products for different protocols such as BACnet, Modbus, and etc. In addition, LG gateways include Stand-alone central control capability to act as a back-up controller of the BMS if needed.

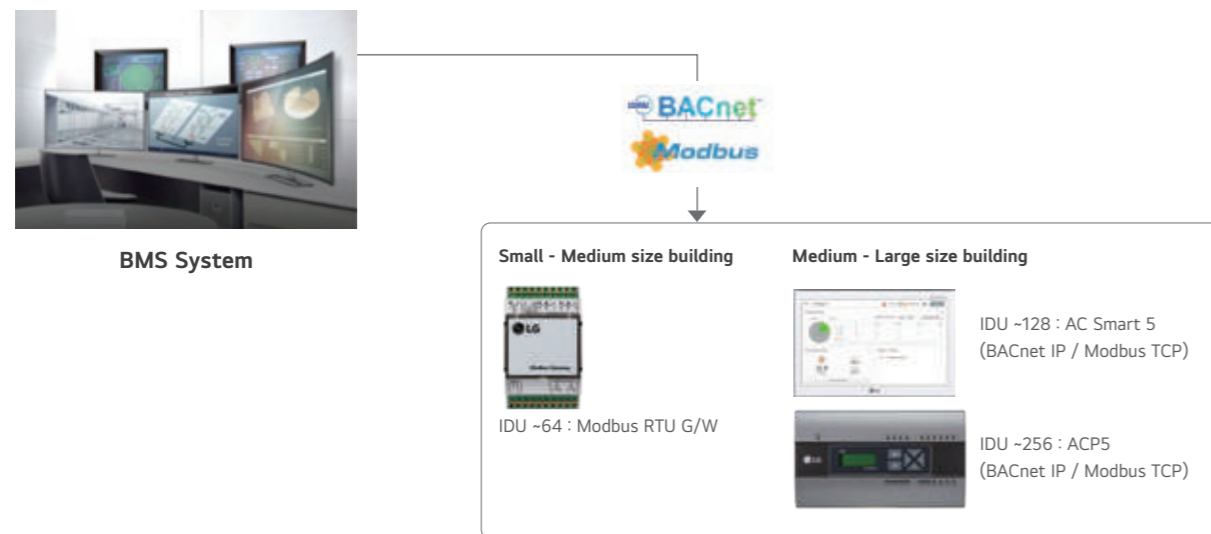

Interlocking Solution by Using ACU Module



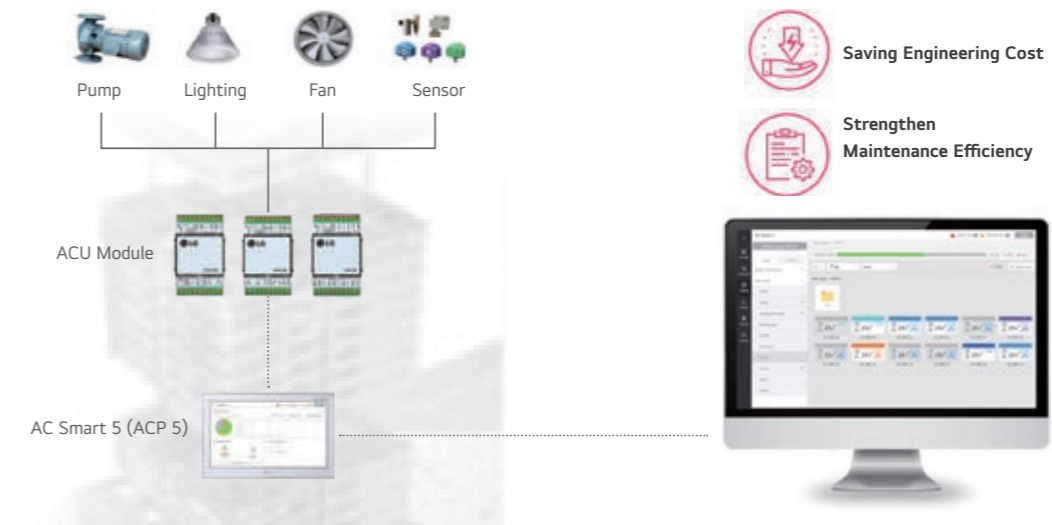



It is costly to introduce a BMS system to control multiple devices or systems in a small building. With the ACU module, various IO contact points (DI, DO, UI, AO) can be interlocked and integrated, while control is possible from the LG central controller. This enables an efficient management of lighting, pumps and other devices in the building in conjunction with the HVAC system.



Interlocking Solution Using Dry Contact




















3rd party thermostats can be used to control LG air conditioners in a room by using a multi point dry contact. The dry contact enables basic control of air conditioners as well as making it possible to report the status and any errors impacting the indoor unit. The Standard III remote control has a DO port. With this DO port, it is possible to interlock the indoor unit with 3rd party devices such as lighting, a fan, or a radiator, based on parameters like operation mode or current temperature. The indoor unit can be interlocked with various types of input such as card key-tag, door sensor, human detection sensor etc. so that the air conditioner is automatically operated. In addition, the dry contact option settings enable operation of air conditioner to maintain proper temperature when the occupant is absent. This solution makes sure that the room does not overheat or become too cold when unoccupied so that energy cost can be saved.


















Features	Appearance	3	4	5	6	8	10	12	14		16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	...	96						
						•	•	•	•		•	•	•	•	•	•																																			
<p>MULTI V™ i</p> <ul style="list-style-type: none"> Large capacity ODU (Up to 26 HP) Powerful cooling / heating performance Flexible ODU combination AI efficiency / comfort / smart up Scability to various application Black Fin heat exchanger Large space, high rise building and individual control building 																	•	•	•	•	•	•	•	•	•	•																									
<ul style="list-style-type: none"> Shopping mall Education Office 																													•	•	•	•	•	•	•	•	•	•	•	•	•	•									
																																																			
<p>MULTI V™ S</p> <ul style="list-style-type: none"> Space saving Flexible design Slim, light, broad range (3 -12 HP) Large number of connectable indoor units (Up to 20 Units) Small, medium building 			•	•	•	•																																													
<ul style="list-style-type: none"> Apartment House & villa 						•	•	•																																											

		kW																										Energy Monitoring	2 Set Point	Occupied / Unoccupied Scheduling Function	Group Control	Test Run (Cooling)	Test Run (Heating)	Model Information Monitoring	Auto Addressing	Refrigerant Leakage Detection	Thermo On / Off Range Setting (Cooling)	Thermo On / Off Range Setting (Heating)	Static Pressure (Only for Ceiling Concealed Duct Type)	1 Point External Input (On / Off Control)	Filter Sign (Remaining Time)	Auto Restart Function Disable / Enable	Wi-Fi Ready
Type	BTU	5k	7k	9k	12k	15k	18k	21k	24k	28k	30k	36k	42k	48k	54k	76k	96k																										
4 th generation Wall Mounted	Standard	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●									
	4 Way Cassette (570 x 570)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●									
4 th generation Ceiling Mounted Cassette	4 Way Cassette (840 x 840)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
	4 Way Cassette High Sensible (840 x 840)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
	Round Ceiling Cassette	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●										
	2 Way Cassette	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●									
	1 Way Cassette	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●								
4 th generation Ceiling Concealed Duct	Mid / High Statics	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●									
	Low Static (Slim)	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●								
4 th generation Fresh Air Intake		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●								
4 th generation Ceiling & Floor Convertible		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
4 th generation Ceiling Suspended		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●							
4 th generation Console		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
4 th generation Floor Standing	Floor Standing with Case	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●						
	Floor Standing without Case	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
Floor Standing (PAC)		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
4 th generation Hydro Kit	Wall-Mounted	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●					
	Low Temperature	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
	High Temperature	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			
4 th generation Energy Recovery Ventilator with DX Coil	with Humidifier	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●				
	without Humidifier	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●			

※ If 4th generation indoor units are combined to 2nd generation indoor units, several functions are not available.
More detailed information, refer to the "MULTI V Indoor units Compatibility Table"

Individual Control			Centralized Control			
Wired Remote Controller		Wireless Remote Controller	Display	Platform	Gateway	
Standard	Simple					
Standard III (White)		 PWLSSB21H (Heat Pump) PWLSSB21C (Cooling Only)	AC Ez	ACP 5	Modbus RTU Gateway	
						
PREMTB101	PQRCVLOQW		PQCSZ250S0 (Indoor Unit ~ 32)	PACP5A000 (Indoor Unit ~ 256) BACnet IP / Modbus TCP	PMBUSB00A (Indoor Unit ~ 16)	
Standard III (Black)			Wi-Fi Modem For Indoor Unit PWFMD200	AC Ez Touch	AC Manager 5	PI485
						
PREMTBB11	PQRCVLOQ	For Indoor Unit PWFMD200	PACEZA000 (Indoor Unit ~ 64)	PACM5A000 (Indoor Unit ~ 8,192)	For Indoor Unit (ERV) PHNFP14A0	
Standard II (White)		AC Smart 5 For AWHIP PP485A00T	 PACSSA000 (Indoor Unit ~ 128) BACnet IP / Modbus TCP	 For AWHIP PP485A00T	 For Outdoor Unit (SINGLE / MULTI) PMNFP14A1	
						
PREMTB001	PQRCHCA0QW (Simple for Hotel)					
Standard II (Black)						
						
PREMTBB01	PQRCHCA0Q (Simple for Hotel)					
Premium						
						
PREMTA000 PREMTA000A PREMTA000B						


Centralized Control	Integration Device			
Facility Integrator	Indoor Unit		Outdoor Unit	AHU Kit
	Dry Contact	Control Accessory		
PDI (Power Distribution Indicator)  Premium (8 ports) PQNUD1S40 Standard (2 ports) PPWRDB000	 Simple Dry Contact PDRYCB000	 PZCWRG3	 IO Module (Input / Output Module) For MULTI V IV, 5, i PVDSMN000	 Communication Kit Return / Room Air Control PAHCMR000
ACS IO Module (Input / Output Module)  PEXPMB000	 Dry Contact for Thermostat PDRYCB320	 PQRSTA0	 Variable Water Flow Control Kit For MULTI V WATER 5 PWFCKN000	 Discharge / Supply Air Control PAHCMS000
ACU IO Module UIO  PEXPMB300	 2 Points Dry Contact (For Setback) PDRYCB400	 Zone Controller 4 Zones by thermostat ABZCA	 Controller Module Main Module PAHCMM000	
UO  PEXPMB200	 For Modbus PDRYCB500 / PDRYCB510 (w/o case)	 Multi-tenant Power Module PINPMB001	 Communication Module PAHCMC000	
UI  PEXPMB100			 Control Kit PAHCNM000 (Max. 3 Outdoor Units)	

EEV Kit (Electronic Expansion Valve)

		
PRLK048A0 (~ 28 kW) PRLK096A0 (~ 56 kW)	PRLK396A0 (~ 112 kW)	PRLK594A0 (~ 168 kW)

024 ~ 071
MULTI V i
MULTI V S

OUTDOOR UNITS

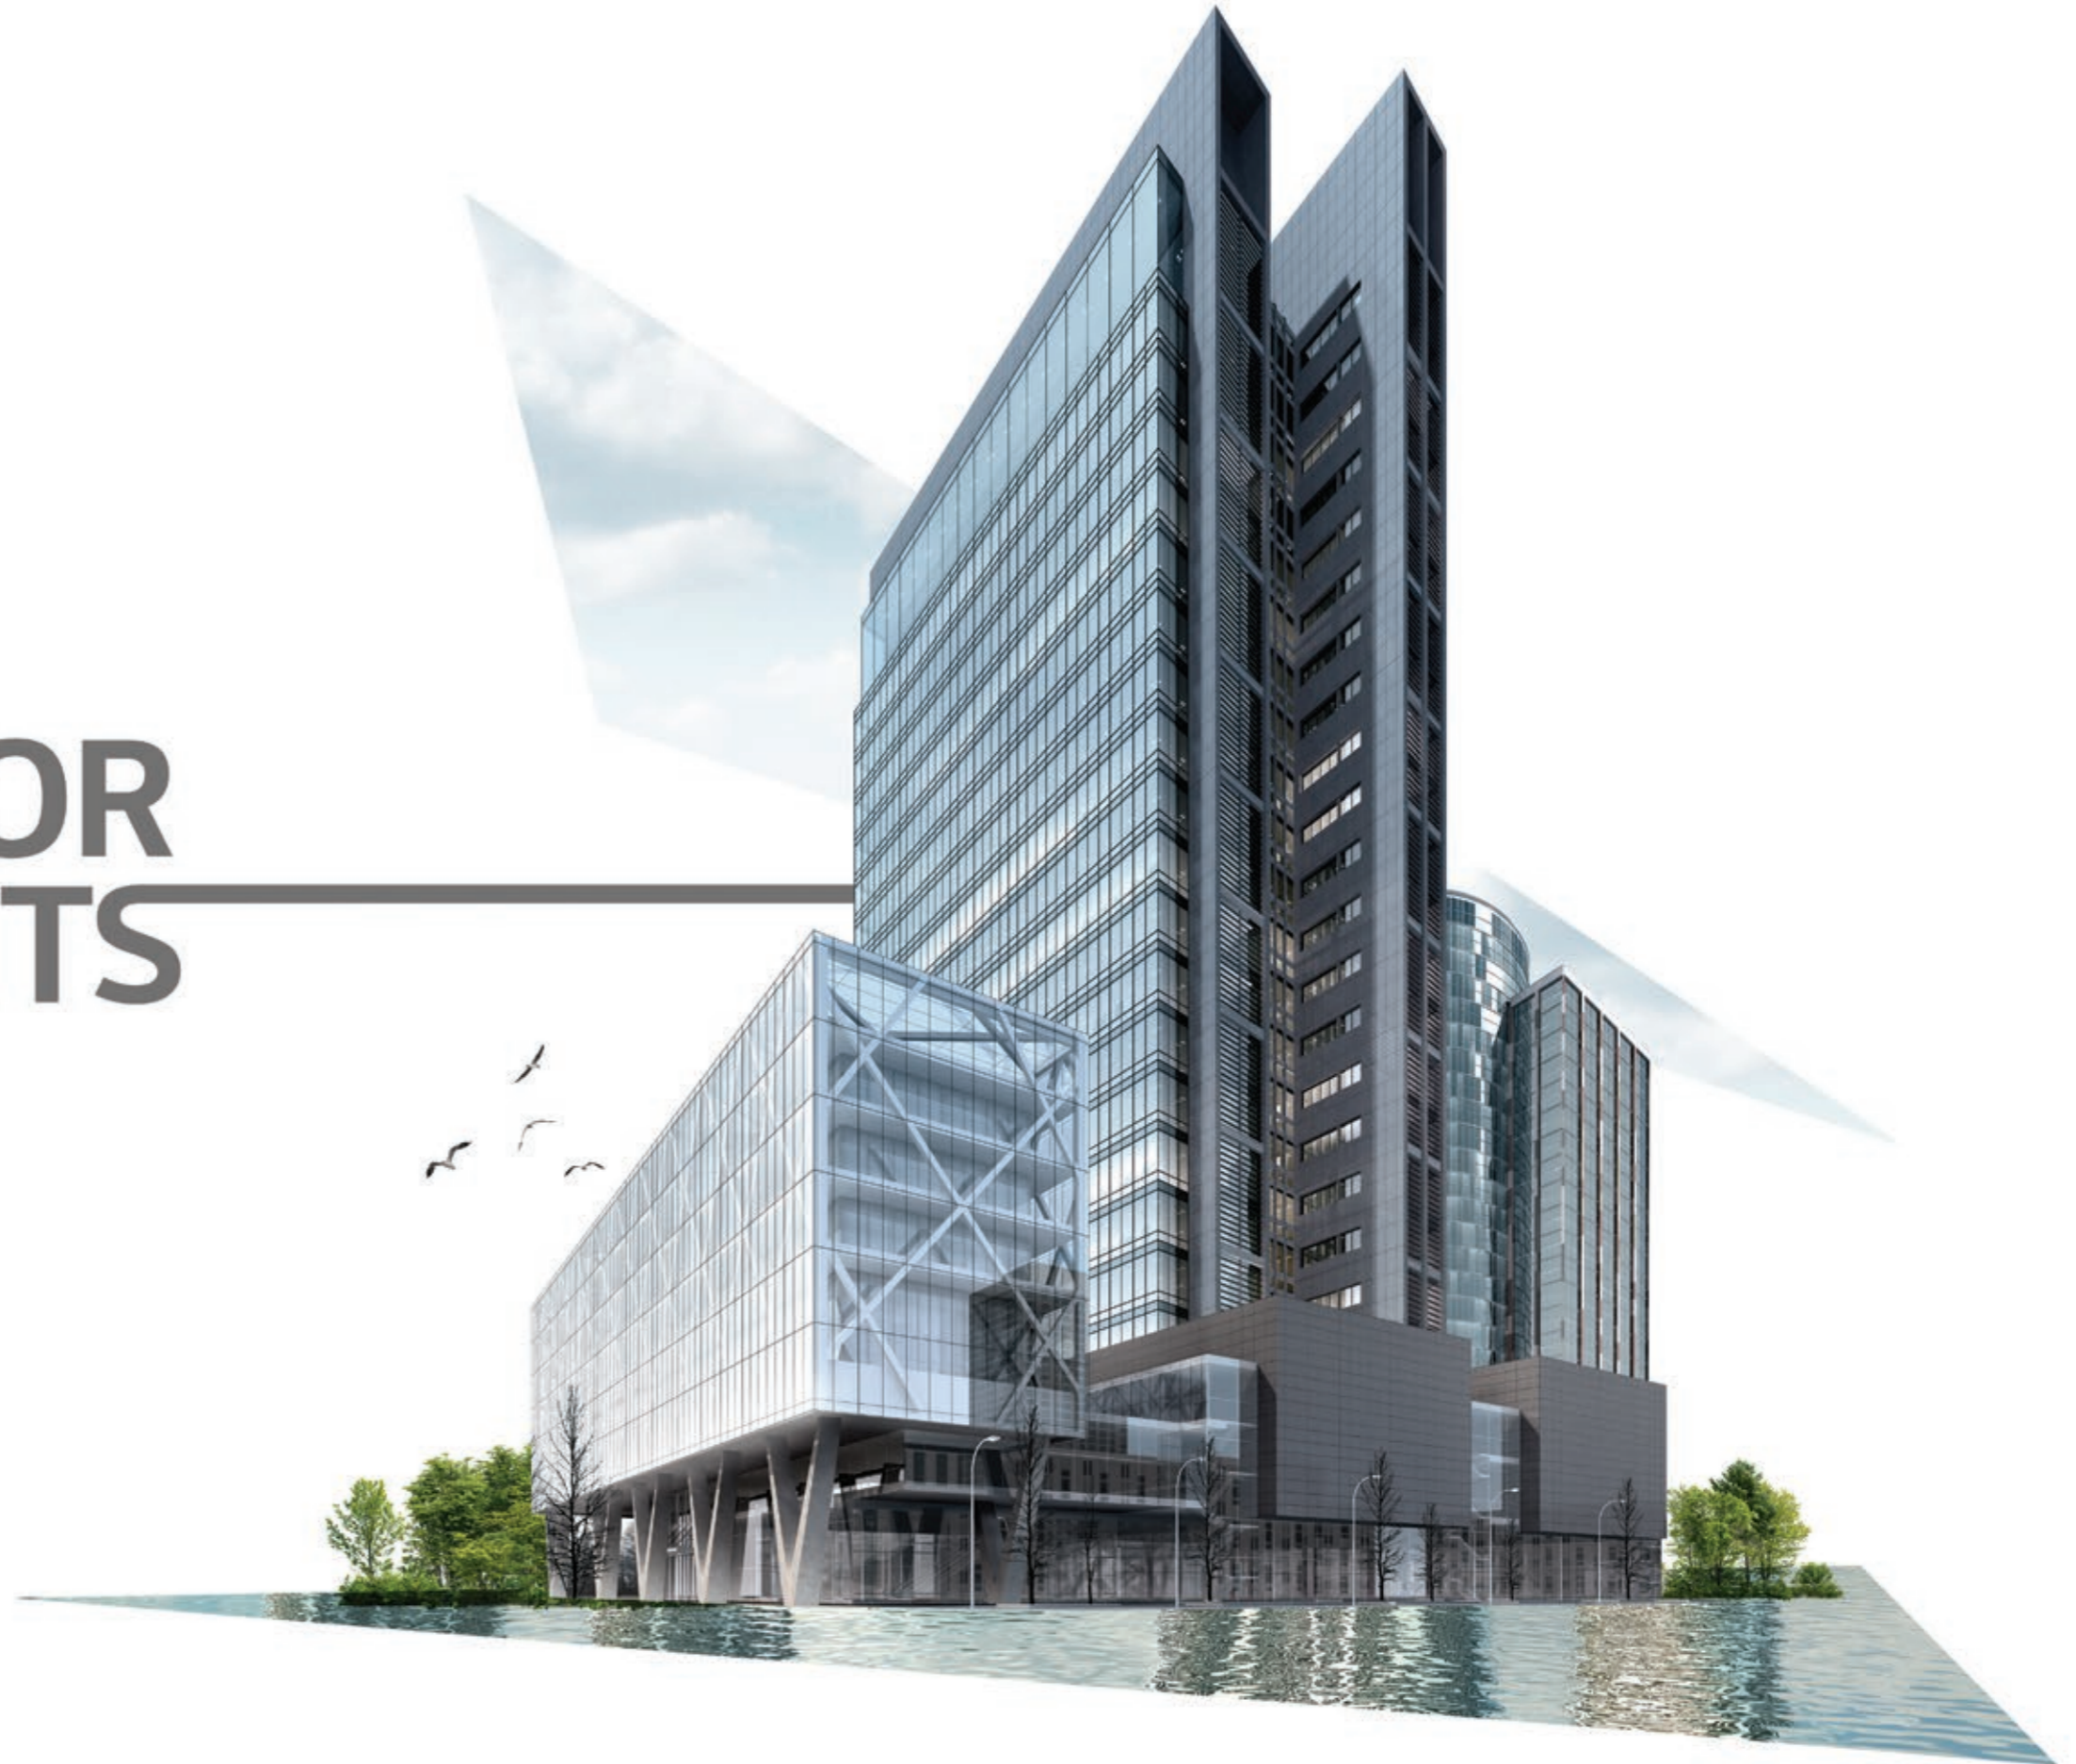

MULTI V™ i

Highlight



Higher Energy Efficiency



Optimal Comfort



Full Cooling Performance up to 43°C



High Reliability

- Energy Saving with AI Engine
- AI Smart Diagnosis
- Large Storage Black Box
- Remote Upgrade System
- Corrosion Resistance Exterior
- Flexible Combination of Outdoor Units




01 INTELLIGENT




Various Environment Recognition & Optimized Operation with AI Engine

- Outstanding Energy Efficiency
- AI Smart Care
- AI Indoor Space Care
- AI Smart Metering
- AI Energy Management



Superior Customer Experience with AI technology

02 INNOVATIVE

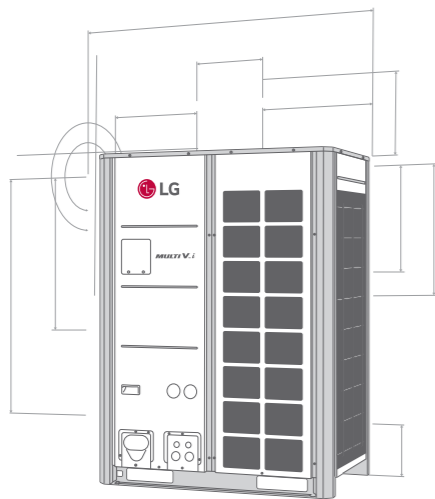

Innovative Energy Efficiency / Performance Realization

- Corrosion Resistance
- Widen Heat Exchanger
- HiPOR™
- Maximum 26 HP for a Single Outdoor Unit
- Compact Size with Larger Capacity
- Powerful Cooling Performance
- Newly Designed Fan & Orifice

03 INTERACTIVE

Upgrading & Evolutionary System

- Flexible Combination of Outdoor Units
- Noise Target Control
- Weather Information Interlocking Control
- AI Smart Diagnosis
- Large Storage Black Box
- Auto Tuning System
- Remote Upgrade System
- LG BECON cloud
- Control Solution with MULTI V i
- Total Piping Length




Interlocking System

- A/C (Air Conditioner)
- LG AHU
- Valve / Pump AO (Analog Output)
- Occupancy Sensor / Alarm / Key-tag DI (Digital Input)
- Fan / Lighting / Switch DO (Digital Output)
- Temperature / Humidity / CO₂ Sensor AI (Analog Input)



Outstanding Energy Efficiency



MULTI V i enables economical operation with excellent energy efficiency improved over previous version that was already unrivaled in the market.

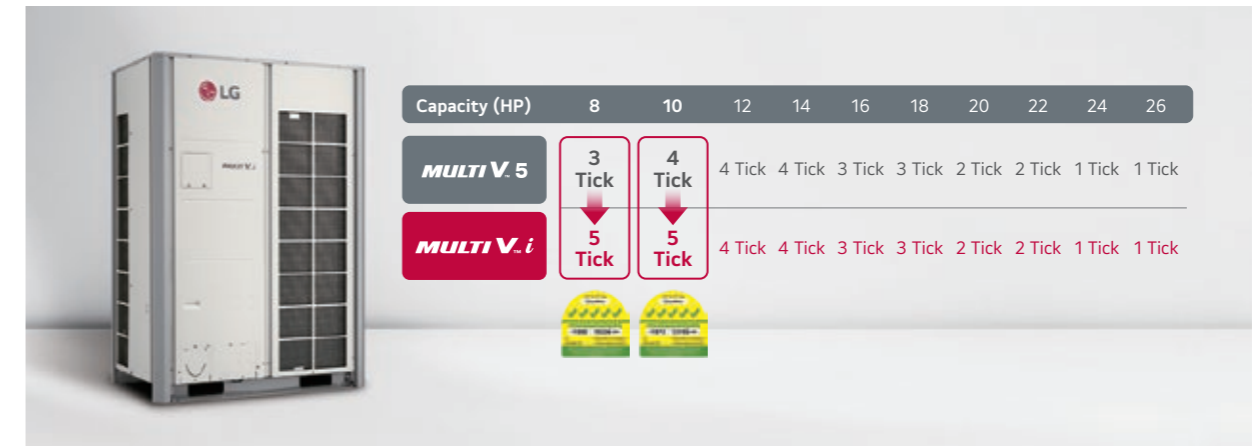

AI Smart Care

MULTI V i can be control using data to adapt to various situations for comfortable space and energy saving. MULTI V i is equipped with machine learning algorithms that enable it to self-learn.


Data Collecting and Saving from IDU & ODU

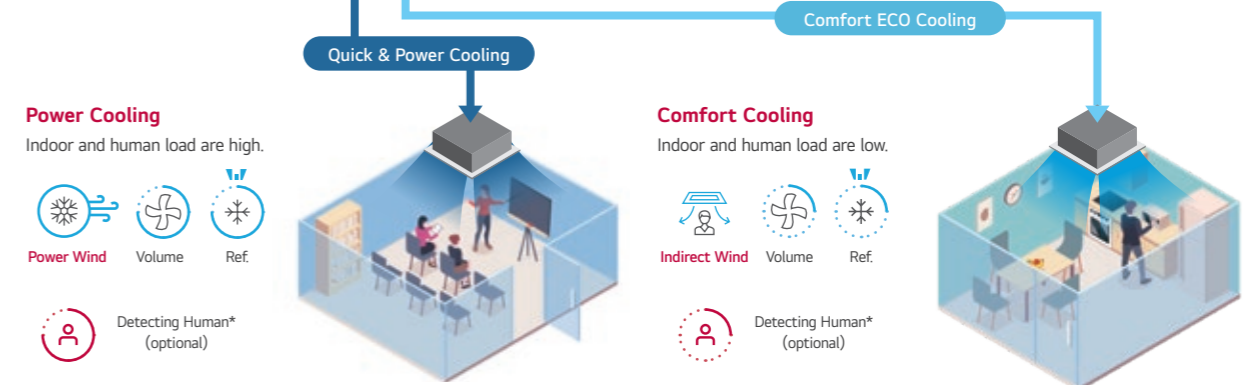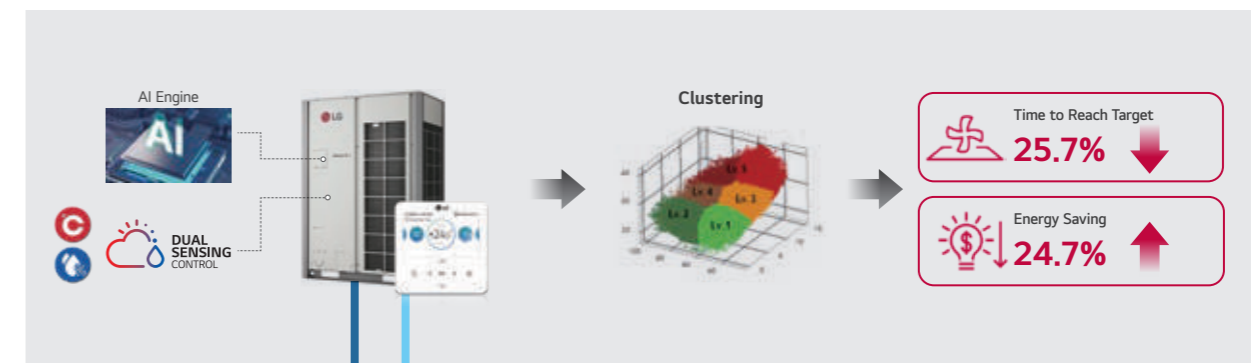

* The Human Detection Sensor is an optional accessory (PTV5AA0).
 ※ This is the result from internal test that is followed KS Test Standard (24 HP model of MULTI V / KS B ISO 15042 : 2006).
 ※ The result may vary depending on the applied model, local temperature, and environment.
 ※ This function can be used only when all indoor units are either in cooling mode or in heating mode.
 ※ This function may or may not be applied depending on the indoor unit.

AI Indoor Space Care


Achieving balanced temperatures for space comfort, MULTI V i identifies adjacent indoor units and defines a virtual group, they automatically turn on / off according to the load.

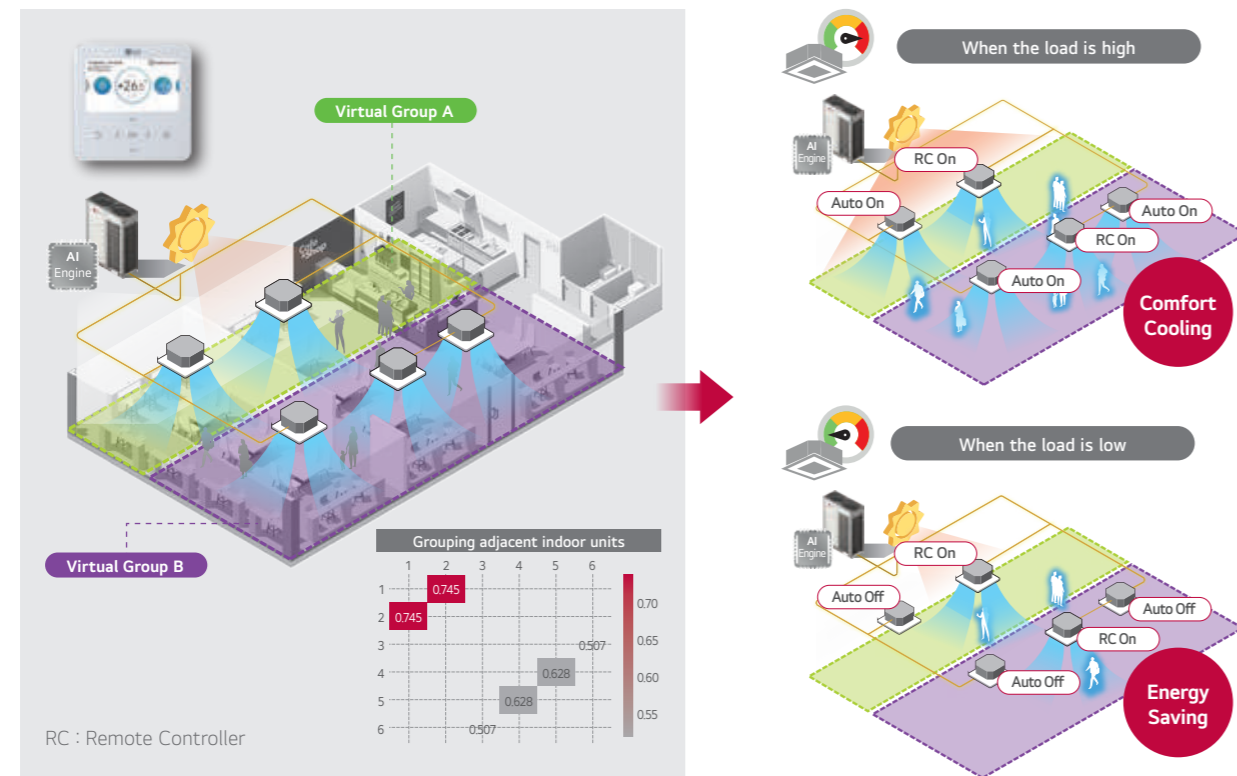

※ This function can be used only when all indoor units are either in cooling mode or in heating mode.
 ※ This function may operate differently depending on the indoor unit.
 ※ This function may or may not be applied depending on the indoor unit.


AI Smart Metering

It is possible to check the estimated energy savings of the system by using AI Smart Care.

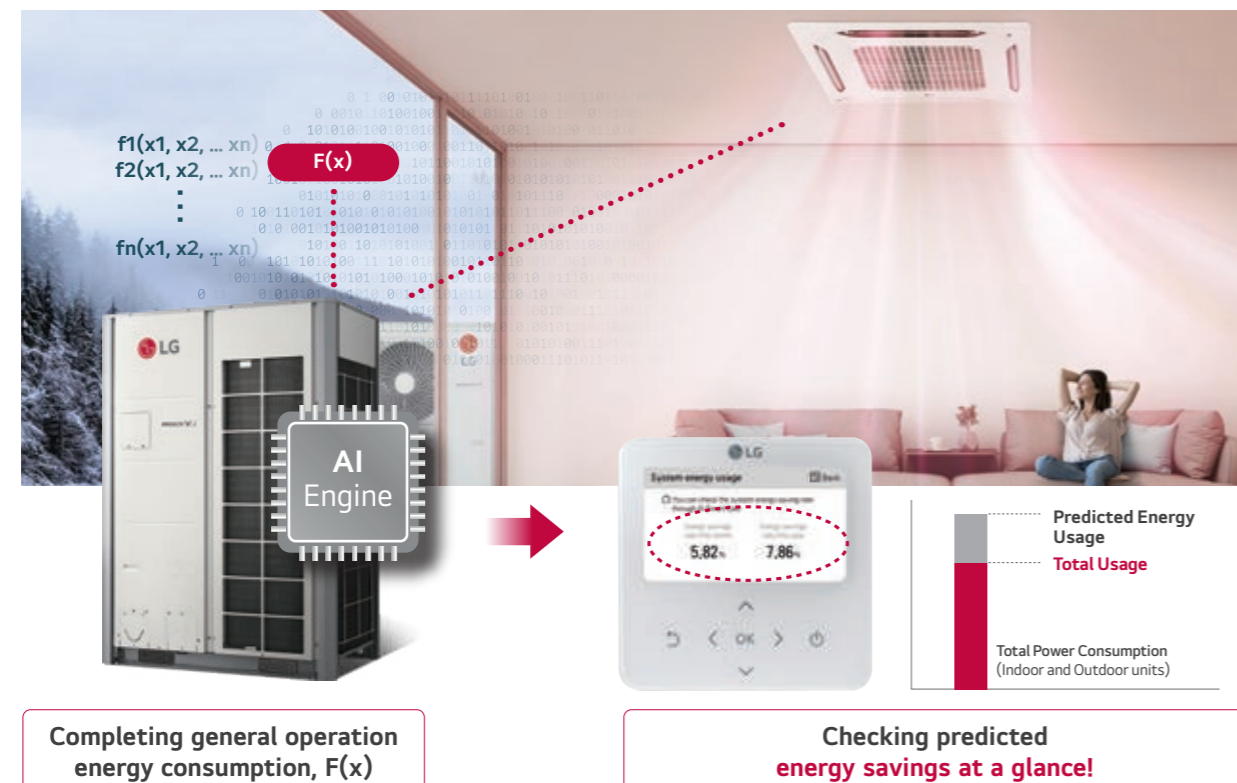


AI Energy Management

MULTI V i is able to preset monthly energy usage according to the target that has been previously set. The AI Energy management in Multi V i allow users to compare and analyze power consumption between months to help in reducing operational costing.

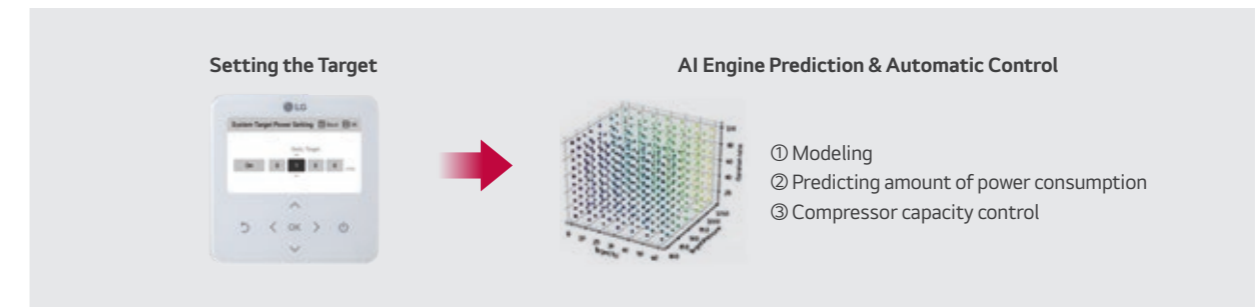


Monthly Usage

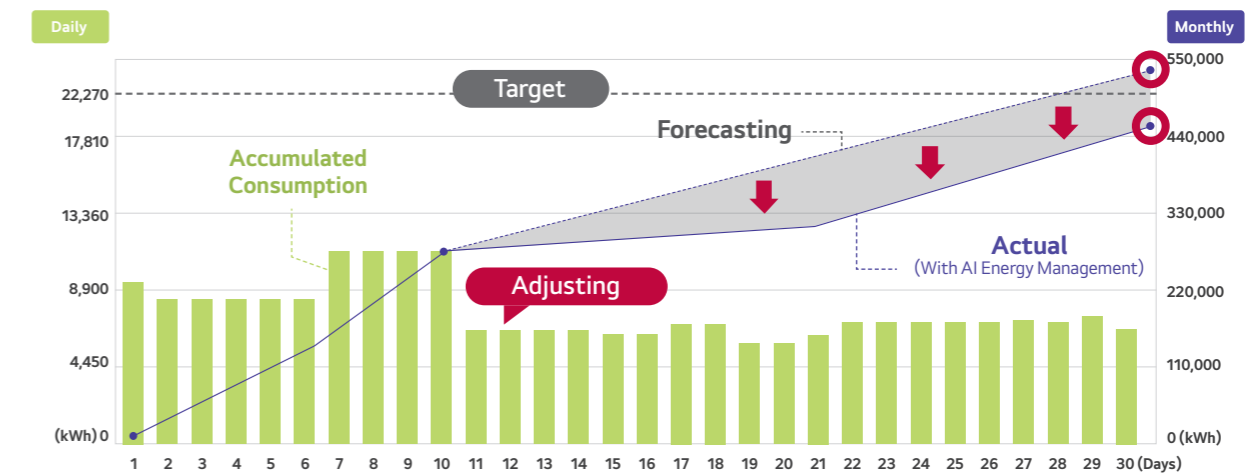

※ The above image is only for the better understanding.
 ※ If more accurate status for energy consumption is needed, ACP and PDI have to be installed.

Corrosion Resistance

"Corrosion Resistance Black Fin" heat exchanger and the body panel are designed for improved corrosion resistance. 2,000 hours for body panels and 10,000 hours for heat exchanger make the product more reliable.

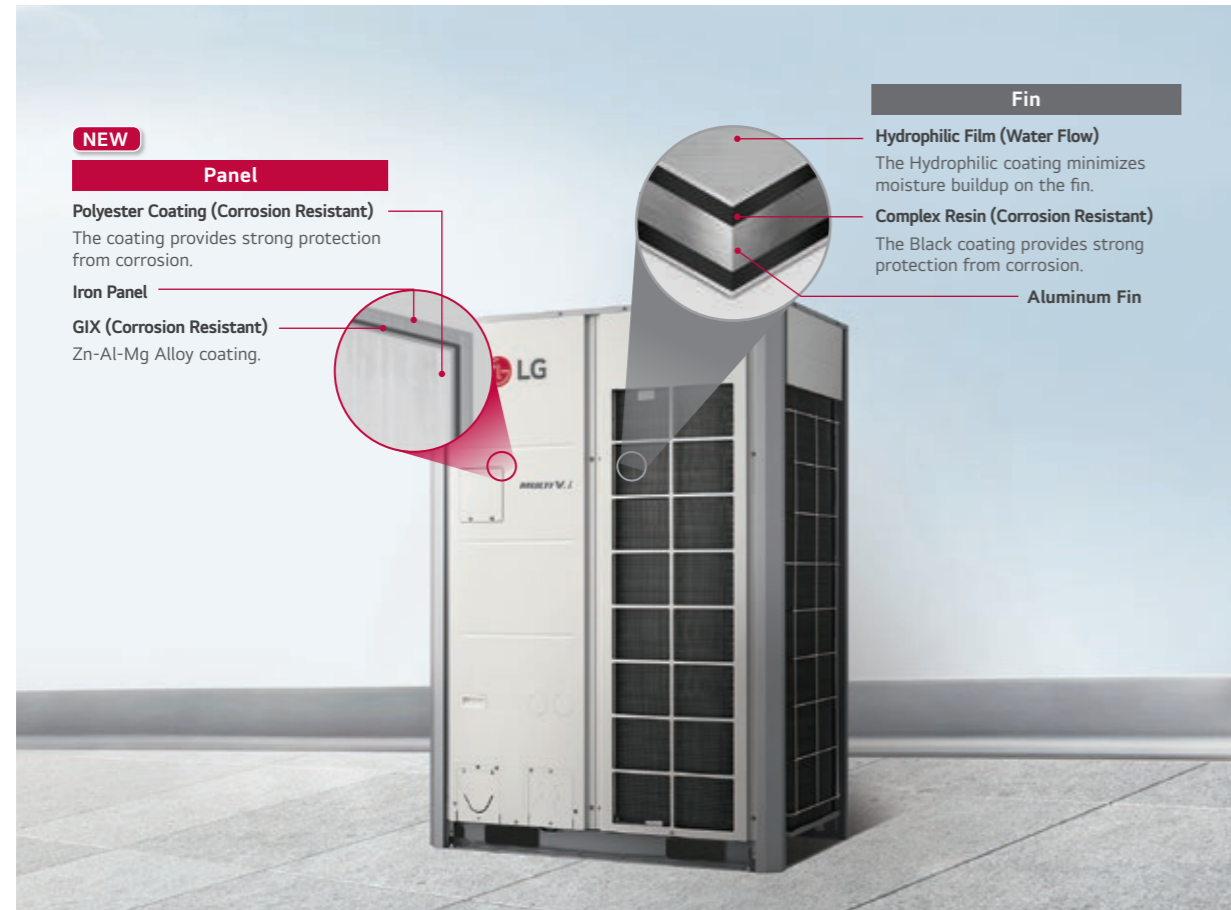

NEW

Panel

Polyester Coating (Corrosion Resistant)
The coating provides strong protection from corrosion.

Iron Panel

GIX (Corrosion Resistant)
Zn-Al-Mg Alloy coating.

Fin

Hydrophilic Film (Water Flow)

The Hydrophilic coating minimizes moisture buildup on the fin.

Complex Resin (Corrosion Resistant)

The Black coating provides strong protection from corrosion.

Aluminum Fin

Salt Spray Test for New Panel

Less than 0.05% area of defects compared to initial.



Fog¹⁾
(35°C, 24 hr)

※ Verification of corrosion resistance performance
- ASTM B117 : 2,000 hours (Last updated : Jul. 2022)
- Test Method B of ISO 9227


186%



Test process is conducted according to ASTM B117
1) Salty water concentration : NaCl aqueous solution (5%)

Salt Spray Test for Black Fin


Less than 0.05% area of defects compared to initial.



Fog¹⁾
(35°C, 24 hr)

※ Verification of corrosion resistance performance
- ASTM B117 : 10,000 hours (Last updated : Dec. 2020)
- Test Method B of ISO 9227

100%



Test process is conducted according to ASTM B117.
1) Salty water concentration : NaCl aqueous solution (5%)


※ The product is not fully treated for anti-corrosion. To install near the sea, additional treatment must be required.

Widen Heat Exchanger

Energy Efficiency has been increased with a larger heat exchanger.

4-sided Heat Exchanger


Improved energy efficiency by increasing the heat exchanger area.

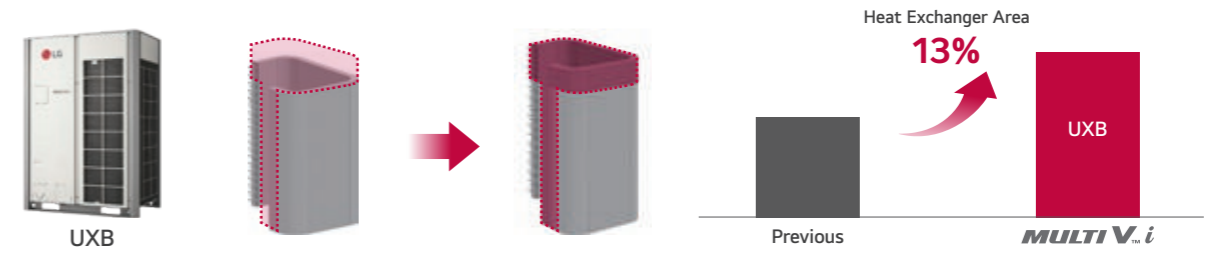

※ As a result of self-test according to KS test standard, it may differ depending on the actual use environment such as applied model and operating temperature.
- Model : MULTI V 57 kW
- Test condition : KS B ISO15042

HiPOR™

Advanced compressor reliability & efficiency

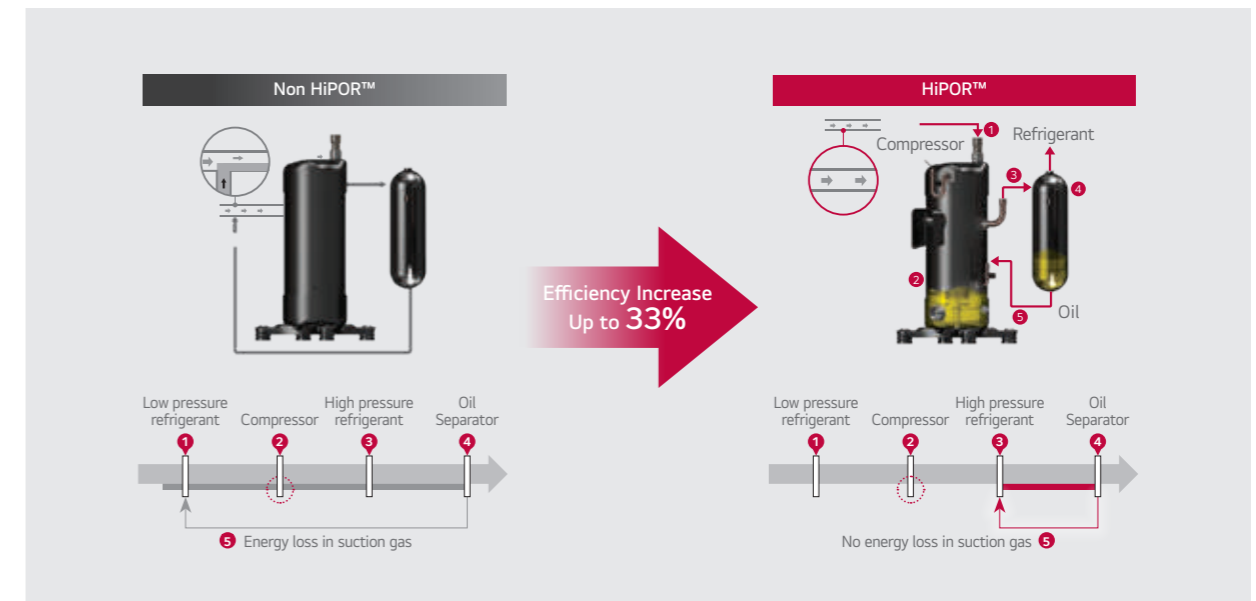

※ LG Internal Test result, Test condition - 15 Hz Rating Condition: Tc = 37.9°C, Te: 7.2°C

Maximum 26 HP for a Single Outdoor Unit



LG MULTI V i saves space, installation time and cost by offering a single outdoor unit with a maximum capacity of 26 HP.

The Outstanding Capacity in 1 Unit
Max. 26 HP

- Space Saving
- Time Saving
- Installation Cost Saving

Compact Size with Larger Capacity


The outdoor units require lesser installation space.

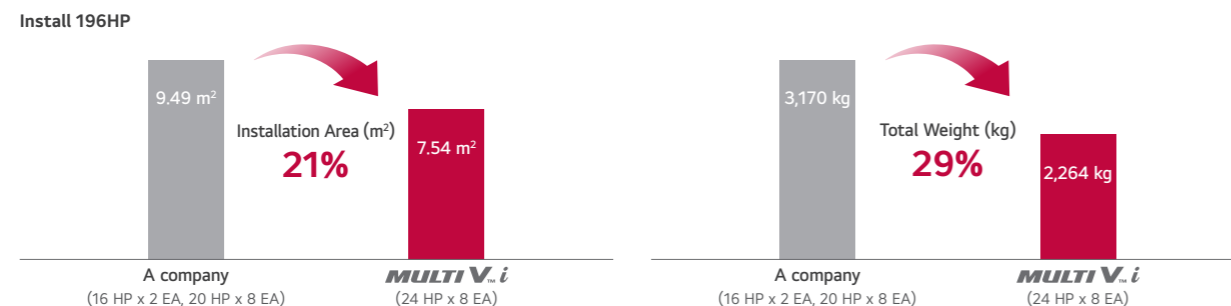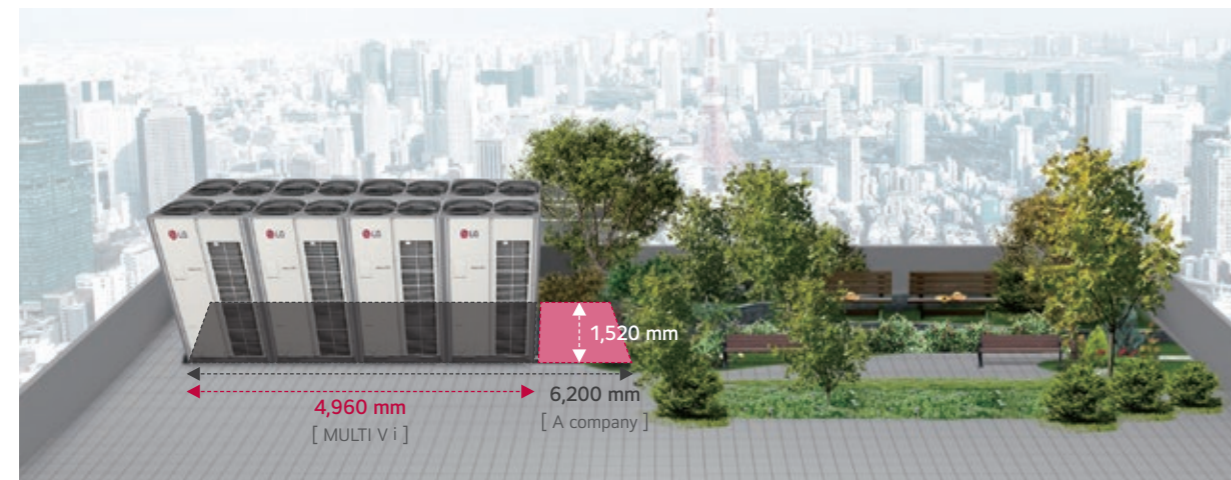

※ This scene is designed only for easier understanding.
 ※ The models of 8 to 24 HP are applicable to the standard combination.

Powerful Cooling Performance

Cooling operation up to 52°C, with full performance at 43°C. End users are able to enjoy comfortable indoor environment even in case of extreme weather conditions outside.

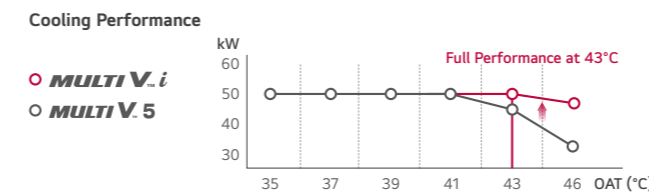

Powerful & Stable Cooling Performance

	MULTI V.i	MULTI V.5
Cooling Operation Range	-15 ~ 52°C	-15 ~ 48°C
Performance at 43°C	Full	92%

※ Performances are based on the following conditions. The result is from internal test.
 - Cooling : Outdoor 43°C DB / Indoor 27°C DB, 19°C WB

Newly Designed Fan & Orifice

The design of a new biomimetic fan was inspired from nature, bringing more air volume and less noise with the same air flow rate compared to the previous system.

Fan Noise Level: 2.6 dB ↓
 Fan Power Consumption: 12% ↓

NEW Designed Biomimetic Fan

The new biomimetic fan has 6 blades that can reduce noise level and power consumption.

- Humpback Whale Design:** Increased Air Volume
- Clam Shell Pattern:** Reduced Noise Level

Compact Aero-Design

With an optimal air flow, the noise level and power consumption is reduced.

- NEW** Compact Orifice
- NEW** Motor Mounted Design

Flexible Combination of Outdoor Units

Flexible combination provides more options for customers' preferences.

Applicable Free Combination

16 ~ 76 HP

Standard Combination Flexible Combination Flexible Combination

18 HP 12 HP 8 HP 22 HP 16 HP 14 HP

Flexible Combination

5 Tick
8 HP + 8 HP
8 HP + 10 HP
10 HP + 10 HP

5 Tick
8 HP + 8 HP + 8 HP
8 HP + 8 HP + 10 HP
8 HP + 10 HP + 10 HP
10 HP + 10 HP + 10 HP

※ The model of 26 HP is not applicable to the free combination.
※ More detailed information can be checked in the LATS tool.

Noise Target Control

The outdoor unit's noise can be reduced by the set sound level in advance.

Controlled by a Remote Controller

Noise Target Control

Available Setting
50 / 55 / 60 / 65 / 70 dB

Noise Level

Function OFF Function ON

Background Noise

Product Noise

65 dB
60 dB
55 dB

time

※ Be sure to select the model referring to the PDB (Product Data Book) because this function may cause a lack of capacity.
※ Results may vary depending on the environment.

Weather Information Interlocking Control

LG MULTI V i provides comfort and convenience by checking ambient weather conditions.

AccuWeather ThinQ Server Wi-Fi Modem Remote Controller

Rainy

Snowy

MULTI V.i

Sensing Temperature & Humidity

Hot

Comfort / Energy Saving Mode

Comfort

Control Flow Amount of Refrigerant

Cold

Control Refrigerant Temperature

Cold Season

Automatic Pre-heating

Dust


Air Cleaning

※ For this function, the air purification kit (accessory) must be applied to the indoor unit.

※ To use this function, it is necessary to connect the ThinQ server with AccuWeather.
※ To connect the MULTI V i to AccuWeather, an accessory such as a Wi-Fi modem is required to connect to the ThinQ server.
※ The operation is based on AccuWeather information.

AI Smart Diagnosis


The LGMV mobile application enables intelligent management by utilizing diagnostic reports to save service time and improves reliability.

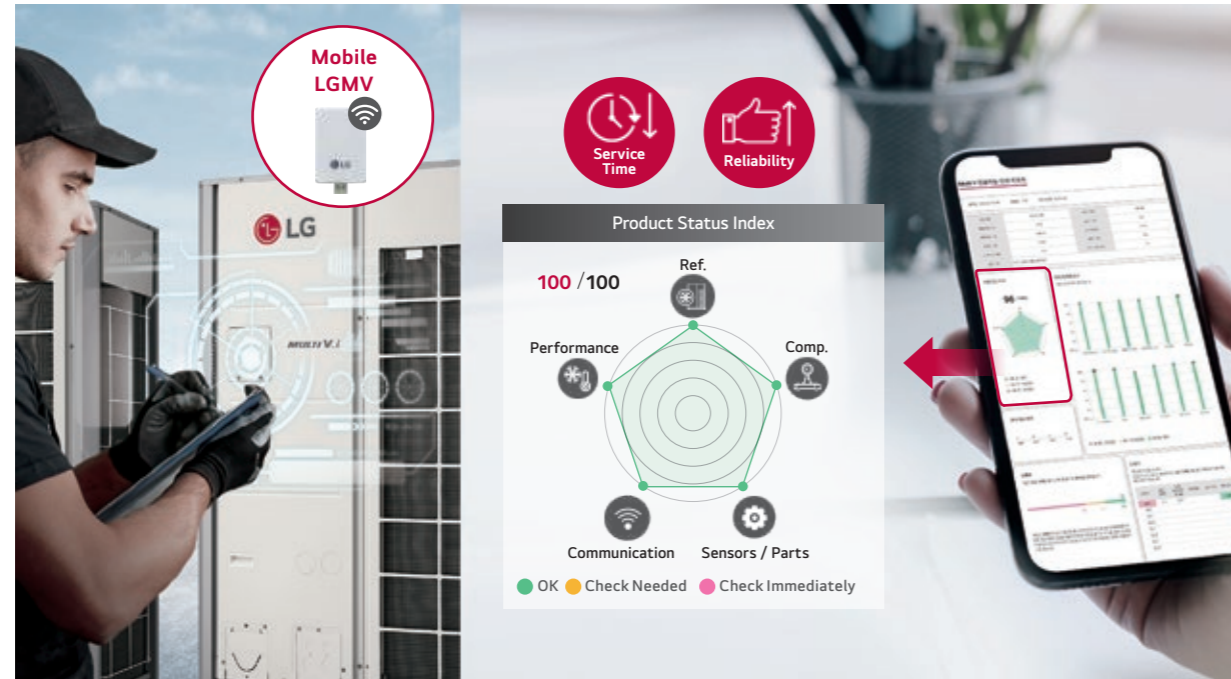

※ UI may be changed without notification.

Large Storage Black Box

Large storage black box in the AI engine, stores up to a maximum of 6 months operation data and 100 failure event information.

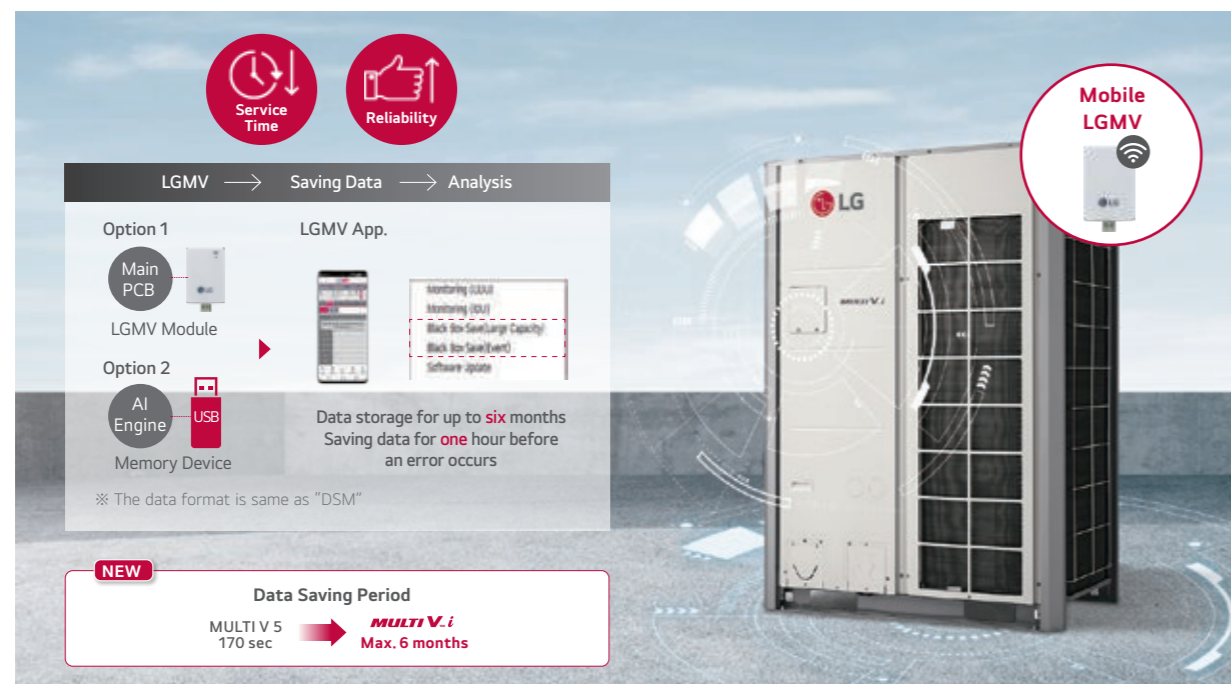

※ This function requires LGMV.
 ※ Available Devices: Windows PC, Android Phone / Tablet, iPhone / iPad
 ※ LGMV cycle data is saved at regular intervals. Default 1 Month, Max. 6-month (optional).

Auto Tuning System


LG MULTI V i provides customers with a new experience through faster and easier service. It automatically upgrades when the compressor and motor are replaced.



※ This function is to be applied to compressor and fan motor only for LG MULTI V i or next generation.

Remote Upgrade System


Connection with the BECON cloud keeps your product up to date by remotely updating not only the outdoor unit but also the AI engine.

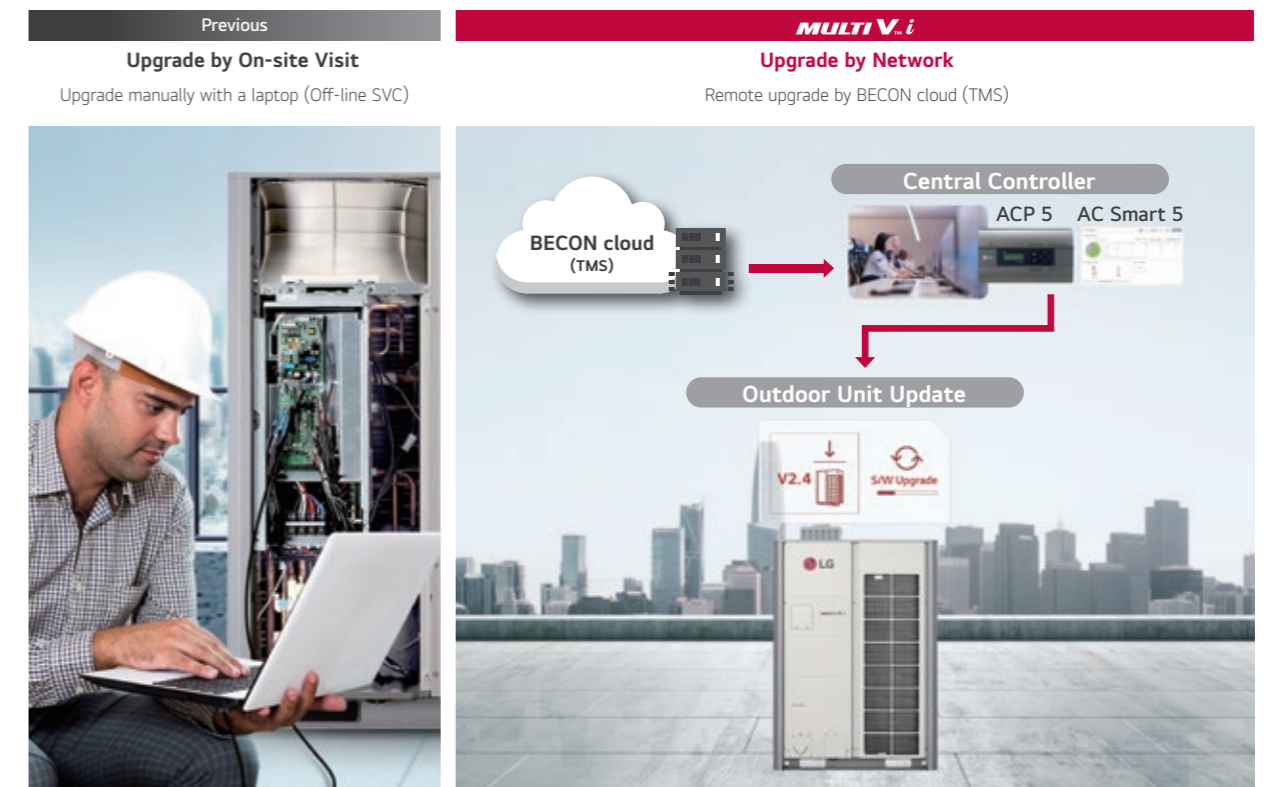

※ This function requires LG BECON cloud service.

LG BECON cloud

LG cloud-based remote system is able to provide real-time monitoring, abnormality diagnosis, real-time care service, and energy management.

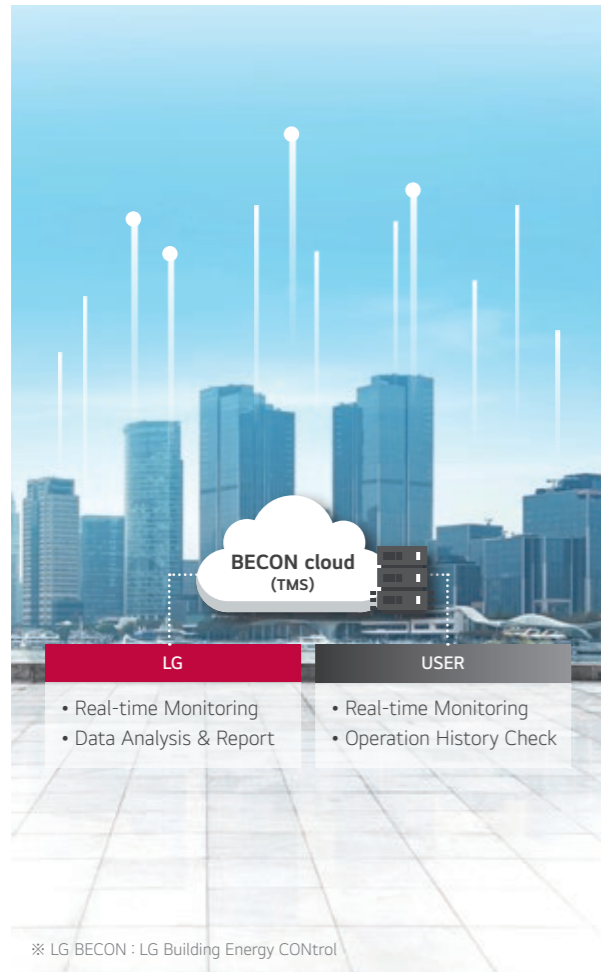

Real-time Monitoring and Control

RCS Remote Control System

Mobile

PC

Tablet PC

Real-time Care Service

FMS LG Facility Maintenance System

Remote Check-up

Group Management

Big-data Analysis

24 / 7 Monitoring

Check-up Reports

Smart Energy Saving

EMS Energy Management System

Energy Management by Comfort Level

EMS Consulting

Reports

Control Solution with MULTI V i

LG MULTI V i offers diverse range of control solutions that satisfy specific needs of each building and user scene preference.

Hotel Room Solution

Application : Hotel, Resort, and etc.

Central Control Solution

Application : Office, Hospital, Hotel, Education, Retail, Dormitory, Shopping Mall, and etc.

Integration Solution

Power Distribution Solution

Application : Apartment, Studio, Office, Retail Complex, Office Complex, and etc.


Individual Control Solution

Application : All

Small Central Control Solution

Application : Small Office, Education, Retail, and etc.

Total Piping Length

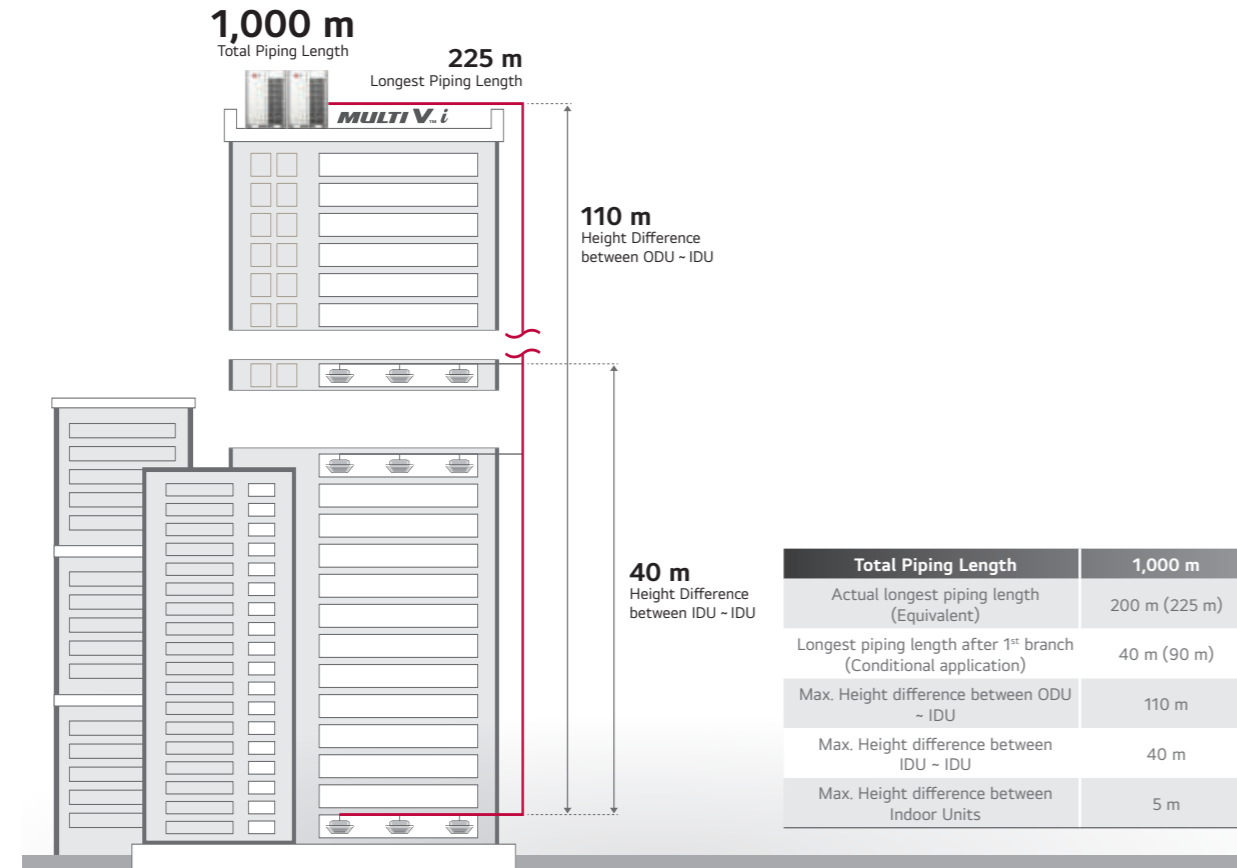


AI Function Application

Category	Sub Category	Tool	AI Function (IDU)						AI Function (ODU)	
			AI Smart Care	AI Indoor Space Care	AI Smart Metering	AI Energy Management	Noise Target Control	AccuWeather Interlocking Control	Smart Diagnosis	Big Capacity Black Box
Cassette	1 Way	TU / TT	●	●	●	●	●	●	●	●
	2 Way	TS	●	●	●	●	●	●	●	●
	Dual Vane 4 Way	TM-A / TP-B	●	●	●	●	●	●	●	●
	Round	TY	●	●	●	●	●	●	●	●
	Mini 4 Way	TQ / TR	●	●	●	●	●	●	●	●
Duct	Low Static	L1 / L2 / L3	●	X	●	●	●	●	●	●
	High Static	B8	●	X	●	●	●	●	●	●
Floor Standing	Mid Static	M1 / M2 / M3	●	X	●	●	●	●	●	●
	CE / CF	CE / CF	●	●	●	●	●	●	●	●
Convertible*	Ceiling Suspended	VM1 / VM2	●	●	●	●	●	●	●	●
	Ceiling & Floor	VE	●	●	●	●	●	●	●	●
Console*	QA	●	●	●	●	●	●	●	●	
Floor Standing (PAC)*	PT3, PF2	●	X	●	●	●	●	●	●	
Wall Mounted*	Standard	SJ / SK / SR	●	●	●	●	●	●	●	

* These will be available from '24, August. These may be changed without notification.

Nomenclature

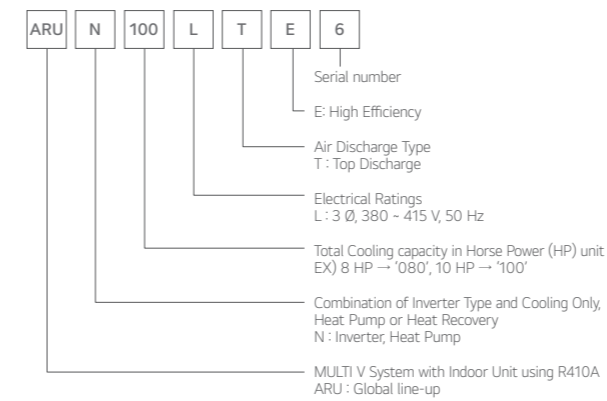


Outdoor Units Function

Category	Functions	Value
Reliability	Defrost / Deicing	○
	High Pressure Switch	○
	Phase Protection	○
	Restart Delay (3-minutes)	○
	Self Diagnosis	○
	Soft Start	○
	Compressor Balanced Operation	○
	Test Function	○
	Night Low Noise Operation	○
	Peak Control	○
Convenience	Mode Lock	○
	SLC (Smart Load Control)	○ (Advanced)
	Linear Bypass Cycle	X
	Noise Target Control	○
Special Functions	Weather Information Interlocking Control	○
	Comfort Cooling	○
	ODU Dry Contact Function	○
	High Static Pressure Compensation	○
	Continuous Cooling	○
	Continuous Heating (Partial Defrost)	X
	Convenient Energy Check	○
	Automatic Tuning Upgrade	○
	Remote Software Upgrade	○
	AI Smart Care	○
AI Indoor Space Care	○	
AI Energy Target Control	○	
AI Smart Diagnosis	○	

○ : Applied, X : Not applied
AI function is applied to the specific indoor unit.
Refer to above 'AI function application' information.

Cooling / Heating Operation

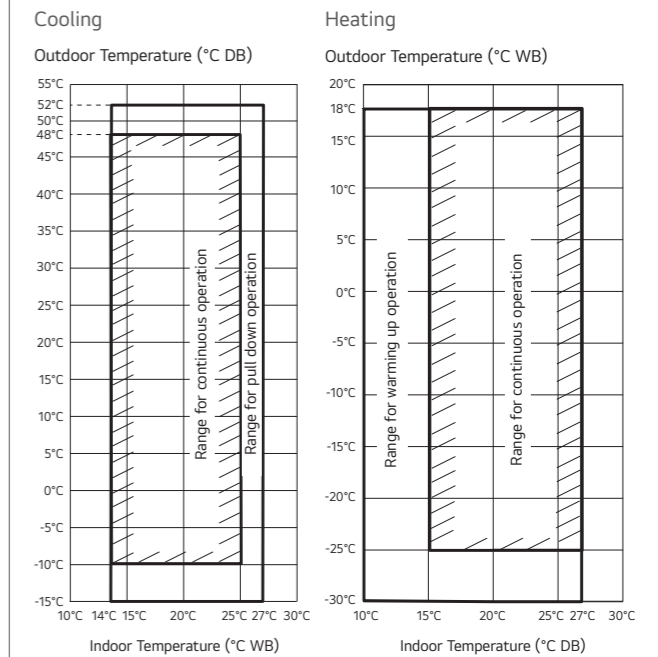


Note
1. These figures assume the following operating conditions
: Equivalent piping length is standard condition, and level difference is 0 m.
2. Range of pull down operation: If the relative humidity is too high, cooling capacity can be decreased by the sensible heat reduction.
3. Warming up operation means that the outdoor (outside) unit operates to reach the range of continuous operating, however it may not operate continuously due to safety or protection logic.




ARUN082LTE6 / ARUN102LTE6
 ARUN122LTE6 / ARUN142LTE6
 ARUN162LTE6 / ARUN182LTE6
 ARUN202LTE6 / ARUN222LTE6
 ARUN242LTE6 / ARUN262LTE6

[Unit : mm]

No.	Part Name	Description
1	Leakage test hole (Side)	∅ 22.2
2	Wire routing hole (Front)	2-∅ 30
3	Wire routing hole (Bottom)	2-∅ 22.2
4	Power cord routing hole (Front)	2-∅ 45
5	Power cord routing hole (Bottom)	2-∅ 50
6	Pipe routing hole (Front)	-
7	Pipe routing hole (Bottom)	-



3D View

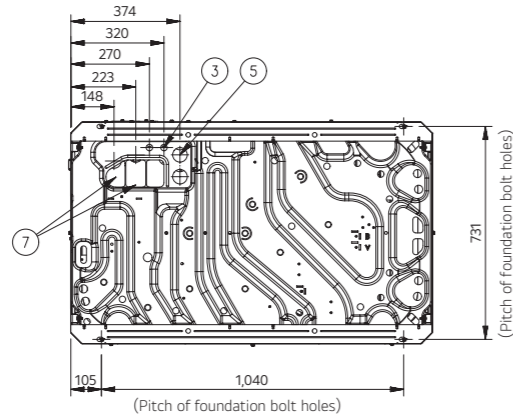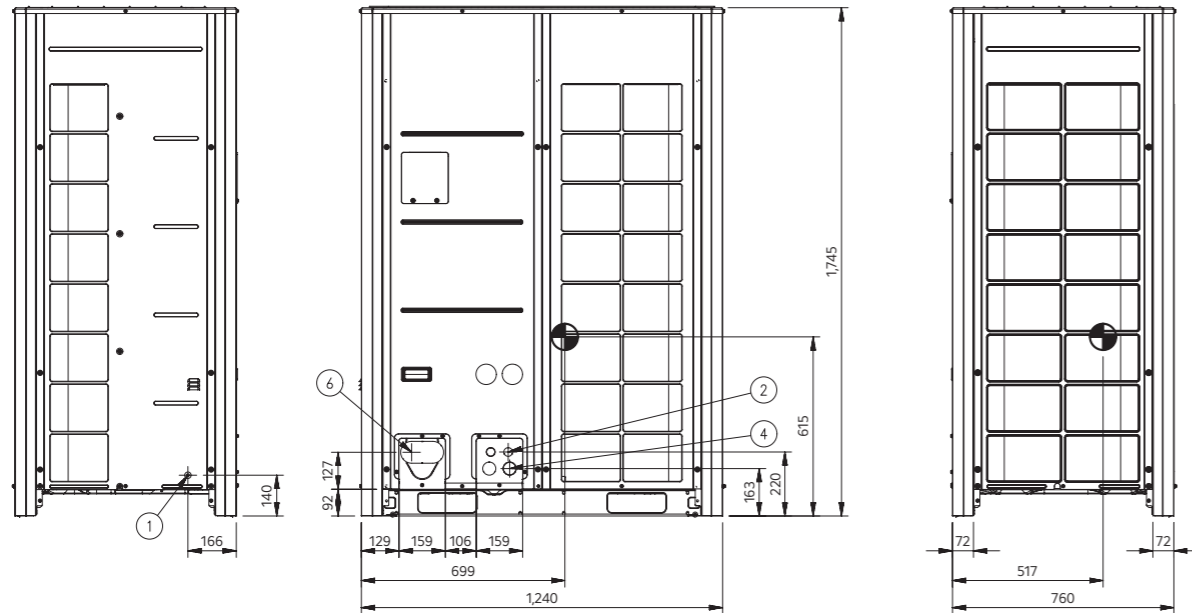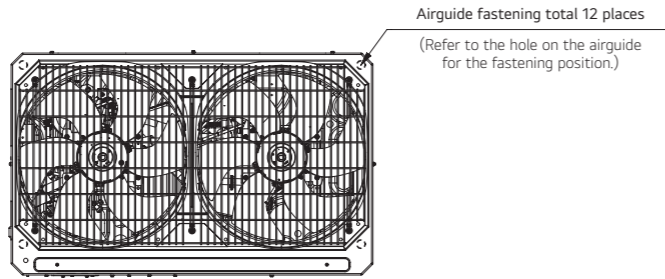

ARUN082LTE6 / ARUN102LTE6 / ARUN122LTE6
 ARUN142LTE6 / ARUN162LTE6



HP		8	10	12	14	16
Tick		5 Tick	5 Tick	4 Tick	4 Tick	3 Tick
Classification	Chassis	UXB				
	Combination Unit	ARUN082LTE6 / ARUN102LTE6 / ARUN122LTE6 / ARUN142LTE6 / ARUN162LTE6				
Power Supply	Case 1	V / ∅ / Hz 380 ~ 415, 3, 50				
	Limit Range of Voltage (Case 1)	V 342 ~ 456				
	Case 2	V / ∅ / Hz 380, 3, 60				
	Limit Range of Voltage (Case 2)	V 342 ~ 418				
Cooling Capacity	Rated	kW 22.40	28.00	33.60	39.20	44.80
	Rated	Btu/h 76,400	95,500	114,600	133,800	152,900
Heating Capacity	Rated	kW 25.20	31.50	37.80	44.10	50.40
	Rated	Btu/h 86,000	107,500	129,000	150,500	172,000
Power Input (Cooling)	Rated	kW 4.75	6.20	8.00	10.30	10.90
Power Input (Heating)	Rated	kW 4.67	5.78	7.60	9.30	10.80
Efficiency	EER (Cooling COP)	W/W 4.70				
	IEER ¹⁾	W/W 6.19				
	COP (Rated)	W/W 5.40				
Power Factor (Cooling / Heating)	Rated	0.93 / 0.93				
	Type	Propeller Fan				
Outdoor Fan	Air Flow Rate (High)	m ³ /min x No. 320 x 1				
	Max. External Static Pressure	Pa 80				
	Discharge Direction (Side / Top)	TOP				
	Drive	DC Inverter				
Outdoor Fan Motor	Output	W x No. 900 x 2				
	Type	Hermetically Sealed Scroll				
Compressor	Piston Displacement	cm ³ /rev 62.1				
	Number of Revolution	rev./min 3,600				
	Motor Output	W x No. 5,300 x 1				
	Oil Type	FW68L (PVE)				
Heat Exchanger	Fin Type	Wide Louver Plus				
	Net (W x H x D)	mm 1,240 x 1,745 x 760				
Dimensions	Shipping (W x H x D)	mm 1,282 x 1,919 x 802				
	Net	kg 217.0				
Weight	Shipping	kg 230.0				
	Color	Morning Gray / Dawn Gray				
Exterior	RAL (Classic)	RAL 7038 / RAL 7037				
	Type	R410A				
Refrigerant	Precharged Amount	kg 11.0				
	t-CO ₂ eq.	- 22.963				
	Control Type	Electronic Expansion Valve				
Connecting Pipe	Liquid	mm (inch) ∅ 9.52 (3/8)				
	Gas	mm (inch) ∅ 19.05 (3/4)				
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A) 58.5 / 59.5				
	Sound Power Level (Outdoor Unit)	dB (A) 80.0 / 81.0				
Connecting Cable (VCTF-SB)	Communication Cable	mm ² x cores 1.0 ~ 1.5 x 2 C				
Connectable Indoor Units Number	Max. (Conditional)	EA 13 (20) / 16 (25) / 20 (30) / 23 (35) / 26 (40)				

NOTE
 1) Integrated Energy Efficiency Ratio (IEER) = (0.020 x A) + (0.617 x B) + (0.238 x C) + (0.125 x D) where A = COP at full load cooling capacity, B = COP at 75% part load cooling capacity, C = COP at 50% part load cooling capacity, D = COP at 25% part load cooling capacity. IEER is used to calculate the annual energy consumption and annual energy cost for VRF air-conditioners.

**ARUN382LTE6 / ARUN402LTE6
ARUN422LTE6**



HP			38	40	42
Classification	Chassis	-	UXB + UXB	UXB + UXB	UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN142LTE6	ARUN242LTE6 ARUN162LTE6	ARUN242LTE6 ARUN182LTE6
Power Supply	Case 1	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 - 456	342 - 456	342 - 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 - 418	342 - 418	342 - 418
Cooling Capacity	Rated	kW	106.4	112.0	117.6
	Rated	Btu/h	363,100	382,200	401,300
Heating Capacity	Rated	kW	118.4	124.7	131.0
	Rated	Btu/h	403,900	425,400	446,900
Power Input (Cooling)	Rated	kW	28.95	29.55	31.05
Power Input (Heating)	Rated	kW	27.30	28.80	29.20
Efficiency	EER (Cooling COP)	W/W	3.68	3.79	3.79
	COP (Rated)	W/W	4.34	4.33	4.49
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1)	(320 × 1) + (320 × 1)	(320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 x 3	62.1 x 4	62.1 x 4
	Number of Revolution	rev./min	3,600 x 3	3,600 x 4	3,600 x 4
	Motor Output	W x No.	5,300 x 3	5,300 x 4	5,300 x 4
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 1) x 2	(1,240 x 1,745 x 760) x 1) x 2	(1,240 x 1,745 x 760) x 1) x 2
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 1) x 2	(1,282 x 1,919 x 802) x 1) x 2	(1,282 x 1,919 x 802) x 1) x 2
Weight	Net	kg	283.0 + 217.0	283.0 + 283.0	283.0 + 283.0
	Shipping	kg	296.0 + 230.0	296.0 + 296.0	296.0 + 296.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	27.0	32.0	32.0
	t-CO ₂ eq.	-	56.363	66.800	66.800
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
	Gas	mm (inch)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	66.1 / 67.1	66.1 / 67.1	66.4 / 67.3
Sound Power Level (Outdoor Unit)	Cooling / Heating	dB (A)	88.9 / 89.9	88.9 / 89.9	89.1 / 90.1
Connecting Cable	Communication Cable (VCTF-SB)	mm ² x cores	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	61 (64)	64	64

**ARUN442LTE6 / ARUN462LTE6
ARUN482LTE6**



HP			44	46	48
Classification	Chassis	-	UXB + UXB	UXB + UXB	UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN202LTE6	ARUN242LTE6 ARUN222LTE6	ARUN242LTE6 ARUN242LTE6
Power Supply	Case 1	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 - 456	342 - 456	342 - 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 - 418	342 - 418	342 - 418
Cooling Capacity	Rated	kW	123.2	128.8	134.4
	Rated	Btu/h	420,400	439,500	458,600
Heating Capacity	Rated	kW	137.3	143.6	148.6
	Rated	Btu/h	468,400	489,900	506,800
Power Input (Cooling)	Rated	kW	33.25	35.35	37.30
Power Input (Heating)	Rated	kW	32.60	34.70	36.00
Efficiency	EER (Cooling COP)	W/W	3.71	3.64	3.60
	COP (Rated)	W/W	4.21	4.14	4.13
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1)	(320 × 1) + (320 × 1)	(320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 x 4	62.1 x 4	62.1 x 4
	Number of Revolution	rev./min	3,600 x 4	3,600 x 4	3,600 x 4
	Motor Output	W x No.	5,300 x 4	5,300 x 4	5,300 x 4
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 1) x 2	(1,240 x 1,745 x 760) x 1) x 2	(1,240 x 1,745 x 760) x 1) x 2
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 1) x 2	(1,282 x 1,919 x 802) x 1) x 2	(1,282 x 1,919 x 802) x 1) x 2
Weight	Net	kg	283.0 + 283.0	283.0 + 283.0	283.0 + 283.0
	Shipping	kg	296.0 + 296.0	296.0 + 296.0	296.0 + 296.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	32.0	32.0	32.0
	t-CO ₂ eq.	-	66.800	66.800	66.800
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
	Gas	mm (inch)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	66.7 / 67.7	67.7 / 68.3	68.0 / 69.0
Sound Power Level (Outdoor Unit)	Cooling / Heating	dB (A)	89.4 / 90.4	90.1 / 91.5	91.0 / 92.0
Connecting Cable	Communication Cable (VCTF-SB)	mm ² x cores	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN502LTE6 / ARUN522LTE6
ARUN542LTE6



HP			50	52	54
Classification	Chassis	-	UXB + UXB + UXB	UXB + UXB + UXB	UXB + UXB + UXB
	Combination Unit	-	ARUN222LTE6 ARUN142LTE6 ARUN142LTE6	ARUN242LTE6 ARUN142LTE6 ARUN142LTE6	ARUN242LTE6 ARUN162LTE6 ARUN142LTE6
Power Supply	Case 1	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 - 456	342 - 456	342 - 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 - 418	342 - 418	342 - 418
Cooling Capacity	Rated	kW	140.0	145.6	151.2
	Rated	Btu/h	477,800	496,900	516,000
Heating Capacity	Rated	kW	157.5	162.5	168.8
	Rated	Btu/h	537,500	554,400	575,900
Power Input (Cooling)	Rated	kW	37.3	39.25	39.85
Power Input (Heating)	Rated	kW	35.3	36.60	38.10
Efficiency	EER (Cooling COP)	W/W	3.75	3.71	3.79
	COP (Rated)	W/W	4.46	4.44	4.43
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 4	62.1 × 4	62.1 × 5
	Number of Revolution	rev./min	3,600 × 4	3,600 × 4	3,600 × 5
	Motor Output	W x No.	5,300 × 4	5,300 × 4	5,300 × 5
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
	Net (W x H x D)	mm	(1,240 × 1,745 × 760) × 3	(1,240 × 1,745 × 760) × 3	(1,240 × 1,745 × 760) × 3
Dimensions	Shipping (W x H x D)	mm	(1,282 × 1,919 × 802) × 3	(1,282 × 1,919 × 802) × 3	(1,282 × 1,919 × 802) × 3
	Net	kg	283.0 + 217.0 + 217.0	283.0 + 217.0 + 217.0	283.0 + 283.0 + 217.0
Weight	Shipping	kg	296.0 + 230.0 + 230.0	296.0 + 230.0 + 230.0	296.0 + 296.0 + 230.0
	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
Exterior	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
	Type	-	R410A	R410A	R410A
Refrigerant	Precharged Amount	kg	380	380	430
	t-CO ₂ eq.	-	79.325	79.325	89.763
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
	Liquid	mm (inch)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
Connecting Pipe	Gas	mm (inch)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)
	Cooling / Heating	dB (A)	66.8 / 67.2	67.1 / 68.1	67.1 / 68.1
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	88.5 / 90.1	89.7 / 90.7	89.7 / 90.7
Sound Power Level (Outdoor Unit)	Communication Cable (VCTF-SB)	mm ² × cores	1.0 - 1.5 × 2 C	1.0 - 1.5 × 2 C	1.0 - 1.5 × 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN562LTE6 / ARUN582LTE6
ARUN602LTE6



HP			56	58	60
Classification	Chassis	-	UXB + UXB + UXB	UXB + UXB + UXB	UXB + UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN182LTE6 ARUN142LTE6	ARUN242LTE6 ARUN202LTE6 ARUN142LTE6	ARUN242LTE6 ARUN222LTE6 ARUN142LTE6
Power Supply	Case 1	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 - 456	342 - 456	342 - 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 - 418	342 - 418	342 - 418
Cooling Capacity	Rated	kW	156.8	162.4	168.0
	Rated	Btu/h	535,100	554,200	573,300
Heating Capacity	Rated	kW	175.1	181.4	187.7
	Rated	Btu/h	597,400	618,900	640,400
Power Input (Cooling)	Rated	kW	41.35	43.55	45.65
Power Input (Heating)	Rated	kW	38.50	41.90	44.00
Efficiency	EER (Cooling COP)	W/W	3.79	3.73	3.68
	COP (Rated)	W/W	4.55	4.33	4.27
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 5	62.1 × 5	62.1 × 5
	Number of Revolution	rev./min	3,600 × 5	3,600 × 5	3,600 × 5
	Motor Output	W x No.	5,300 × 5	5,300 × 5	5,300 × 5
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
	Net (W x H x D)	mm	(1,240 × 1,745 × 760) × 3	(1,240 × 1,745 × 760) × 3	(1,240 × 1,745 × 760) × 3
Dimensions	Shipping (W x H x D)	mm	(1,282 × 1,919 × 802) × 3	(1,282 × 1,919 × 802) × 3	(1,282 × 1,919 × 802) × 3
	Net	kg	283.0 + 283.0 + 217.0	283.0 + 283.0 + 217.0	283.0 + 283.0 + 217.0
Weight	Shipping	kg	296.0 + 296.0 + 230.0	296.0 + 296.0 + 230.0	296.0 + 296.0 + 230.0
	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
Exterior	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
	Type	-	R410A	R410A	R410A
Refrigerant	Precharged Amount	kg	430	430	430
	t-CO ₂ eq.	-	89.763	89.763	89.763
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
	Liquid	mm (inch)	Ø 19.05 (3/4)	Ø 19.05 (3/4)	Ø 19.05 (3/4)
Connecting Pipe	Gas	mm (inch)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)
	Cooling / Heating	dB (A)	67.3 / 68.2	67.5 / 68.5	68.4 / 69.0
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	89.9 / 90.9	90.1 / 91.1	90.7 / 92.1
Sound Power Level (Outdoor Unit)	Communication Cable (VCTF-SB)	mm ² × cores	1.0 - 1.5 × 2 C	1.0 - 1.5 × 2 C	1.0 - 1.5 × 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN622LTE6 / ARUN642LTE6
ARUN662LTE6



HP			62	64	66
Classification	Chassis	-	UXB + UXB + UXB	UXB + UXB + UXB	UXB + UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN242LTE6 ARUN142LTE6	ARUN242LTE6 ARUN242LTE6 ARUN162LTE6	ARUN242LTE6 ARUN242LTE6 ARUN182LTE6
Power Supply	Case 1	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 - 456	342 - 456	342 - 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 - 418	342 - 418	342 - 418
Cooling Capacity	Rated	kW	173.6	179.2	184.8
	Rated	Btu/h	592,400	611,500	630,600
Heating Capacity	Rated	kW	192.7	199.0	205.3
	Rated	Btu/h	657,300	678,800	700,300
Power Input (Cooling)	Rated	kW	47.60	48.20	49.70
Power Input (Heating)	Rated	kW	45.30	46.80	47.20
Efficiency	EER (Cooling COP)	W/W	3.65	3.72	3.72
	COP (Rated)	W/W	4.25	4.25	4.35
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
Compressor	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)
	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 5	62.1 × 6	62.1 × 6
	Number of Revolution	rev./min	3,600 × 5	3,600 × 6	3,600 × 6
	Motor Output	W x No.	5,300 × 5	5,300 × 6	5,300 × 6
Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)	
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 3	(1,240 x 1,745 x 760) x 3	(1,240 x 1,745 x 760) x 3
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 3	(1,282 x 1,919 x 802) x 3	(1,282 x 1,919 x 802) x 3
Weight	Net	kg	283.0 + 283.0 + 283.0	283.0 + 283.0 + 283.0	283.0 + 283.0 + 283.0
	Shipping	kg	296.0 + 296.0 + 296.0	296.0 + 296.0 + 296.0	296.0 + 296.0 + 296.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	430	480	480
	t-CO ₂ eq.	-	89.763	100.200	100.200
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 22.2 (7/8)	Ø 22.2 (7/8)	Ø 22.2 (7/8)
	Gas	mm (inch)	Ø 41.3 (1-5/8)	Ø 41.3 (1-5/8)	Ø 53.98 (2-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	68.6 / 69.6	68.6 / 69.6	68.7 / 69.7
	Sound Power Level (Outdoor Unit)	dB (A)	91.5 / 92.5	91.5 / 92.5	91.6 / 92.6
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN682LTE6 / ARUN702LTE6
ARUN722LTE6



HP			68	70	72
Classification	Chassis	-	UXB + UXB + UXB	UXB + UXB + UXB	UXB + UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN242LTE6 ARUN202LTE6	ARUN242LTE6 ARUN242LTE6 ARUN222LTE6	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6
Power Supply	Case 1	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 - 456	342 - 456	342 - 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 - 418	342 - 418	342 - 418
Cooling Capacity	Rated	kW	190.4	196.0	201.6
	Rated	Btu/h	649,700	668,800	687,900
Heating Capacity	Rated	kW	211.6	217.9	222.9
	Rated	Btu/h	721,800	743,300	760,200
Power Input (Cooling)	Rated	kW	51.90	54.00	55.95
Power Input (Heating)	Rated	kW	50.60	52.70	54.00
Efficiency	EER (Cooling COP)	W/W	3.67	3.63	3.60
	COP (Rated)	W/W	4.18	4.13	4.13
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
Compressor	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2)
	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 6	62.1 × 6	62.1 × 6
	Number of Revolution	rev./min	3,600 × 6	3,600 × 6	3,600 × 6
	Motor Output	W x No.	5,300 × 6	5,300 × 6	5,300 × 6
Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)	
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 3	(1,240 x 1,745 x 760) x 3	(1,240 x 1,745 x 760) x 3
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 3	(1,282 x 1,919 x 802) x 3	(1,282 x 1,919 x 802) x 3
Weight	Net	kg	283.0 + 283.0 + 283.0	283.0 + 283.0 + 283.0	283.0 + 283.0 + 283.0
	Shipping	kg	296.0 + 296.0 + 296.0	296.0 + 296.0 + 296.0	296.0 + 296.0 + 296.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	480	480	480
	t-CO ₂ eq.	-	100.200	100.200	100.200
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 22.2 (7/8)	Ø 22.2 (7/8)	Ø 22.2 (7/8)
	Gas	mm (inch)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	68.9 / 69.9	69.6 / 70.3	69.7 / 70.7
	Sound Power Level (Outdoor Unit)	dB (A)	91.7 / 92.7	92.2 / 93.4	92.7 / 93.7
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN742LTE6 / ARUN762LTE6
ARUN782LTE6



HP			74	76	78
Classification	Chassis	-	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN222LTE6 ARUN142LTE6 ARUN142LTE6	ARUN242LTE6 ARUN242LTE6 ARUN142LTE6 ARUN142LTE6	ARUN242LTE6 ARUN242LTE6 ARUN162LTE6 ARUN142LTE6
Power Supply	Case 1	V / Ø / Hz	380 ~ 415, 3, 50	380 ~ 415, 3, 50	380 ~ 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 ~ 456	342 ~ 456	342 ~ 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 ~ 418	342 ~ 418	342 ~ 418
Cooling Capacity	Rated	kW	207.2	212.8	218.4
	Rated	Btu/h	707,100	726,200	745,300
Heating Capacity	Rated	kW	231.8	236.8	243.1
	Rated	Btu/h	790,900	807,800	829,300
Power Input (Cooling)	Rated	kW	55.95	57.90	58.50
Power Input (Heating)	Rated	kW	53.30	54.60	56.10
Efficiency	EER (Cooling COP)	W/W	3.70	3.68	3.73
	COP (Rated)	W/W	4.35	4.34	4.33
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 6	62.1 × 6	62.1 × 7
	Number of Revolution	rev./min	3,600 × 6	3,600 × 6	3,600 × 7
	Motor Output	W x No.	5,300 × 6	5,300 × 6	5,300 × 7
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4
Weight	Net	kg	283.0 + 283.0 + 217.0 + 217.0	283.0 + 283.0 + 217.0 + 217.0	283.0 + 283.0 + 283.0 + 217.0
	Shipping	kg	296.0 + 296.0 + 230.0 + 230.0	296.0 + 296.0 + 230.0 + 230.0	296.0 + 296.0 + 296.0 + 230.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	54.0	54.0	59.0
	t-CO ₂ eq.	-	112.725	112.725	123.163
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 22.2 (7/8)	Ø 22.2 (7/8)	Ø 22.2 (7/8)
	Gas	mm (inch)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	69.0 / 69.6	69.2 / 70.2	69.2 / 70.2
	Sound Power Level (Outdoor Unit)	dB (A)	91.2 / 92.6	91.9 / 92.9	91.9 / 92.9
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN802LTE6 / ARUN822LTE6
ARUN842LTE6



HP			80	82	84
Classification	Chassis	-	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB
	Combination Unit	-	ARUN242LTE6 ARUN242LTE6 ARUN182LTE6 ARUN142LTE6	ARUN242LTE6 ARUN242LTE6 ARUN202LTE6 ARUN142LTE6	ARUN242LTE6 ARUN242LTE6 ARUN222LTE6 ARUN142LTE6
Power Supply	Case 1	V / Ø / Hz	380 ~ 415, 3, 50	380 ~ 415, 3, 50	380 ~ 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 ~ 456	342 ~ 456	342 ~ 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 ~ 418	342 ~ 418	342 ~ 418
Cooling Capacity	Rated	kW	224.0	229.6	235.2
	Rated	Btu/h	764,400	783,500	802,600
Heating Capacity	Rated	kW	249.4	255.7	262.0
	Rated	Btu/h	850,800	872,300	893,800
Power Input (Cooling)	Rated	kW	60.00	62.20	64.30
Power Input (Heating)	Rated	kW	56.50	59.90	62.00
Efficiency	EER (Cooling COP)	W/W	3.73	3.69	3.66
	COP (Rated)	W/W	4.41	4.27	4.23
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80	80
	Discharge Direction (Side / Top)		Top	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct	Direct
	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 7	62.1 × 7	62.1 × 7
	Number of Revolution	rev./min	3,600 × 7	3,600 × 7	3,600 × 7
	Motor Output	W x No.	5,300 × 7	5,300 × 7	5,300 × 7
	Oil Type	-	FW68L (PVE)	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4
Weight	Net	kg	283.0 + 283.0 + 283.0 + 217.0	283.0 + 283.0 + 283.0 + 217.0	283.0 + 283.0 + 283.0 + 217.0
	Shipping	kg	296.0 + 296.0 + 296.0 + 230.0	296.0 + 296.0 + 296.0 + 230.0	296.0 + 296.0 + 296.0 + 230.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A	R410A
	Precharged Amount	kg	59.0	59.0	59.0
	t-CO ₂ eq.	-	123.163	123.163	123.163
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 22.2 (7/8)	Ø 22.2 (7/8)	Ø 22.2 (7/8)
	Gas	mm (inch)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	69.3 / 70.2	69.4 / 70.4	70.0 / 70.8
	Sound Power Level (Outdoor Unit)	dB (A)	92.0 / 93.0	92.2 / 93.2	92.5 / 93.8
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64	64

ARUN862LTE6 / ARUN882LTE6
ARUN902LTE6



HP		86	88	90
Classification	Chassis	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB
	Combination Unit	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6 ARUN142LTE6	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6 ARUN162LTE6	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6 ARUN182LTE6
Power Supply	Case 1	V / Ø / Hz	380 ~ 415, 3, 50	380 ~ 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 ~ 456	342 ~ 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 ~ 418	342 ~ 418
Cooling Capacity	Rated	kW	240.8	252.0
	Rated	Btu/h	821,700	859,900
Heating Capacity	Rated	kW	267.0	279.6
	Rated	Btu/h	910,700	953,700
Power Input (Cooling)	Rated	kW	66.25	68.35
Power Input (Heating)	Rated	kW	63.30	65.20
Efficiency	EER (Cooling COP)	W/W	3.63	3.69
	COP (Rated)	W/W	4.22	4.29
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80
	Discharge Direction (Side / Top)	-	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct
	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 7	62.1 × 8
	Number of Revolution	rev./min	3,600 × 7	3,600 × 8
	Motor Output	W x No.	5,300 × 7	5,300 × 8
	Oil Type	-	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4
Weight	Net	kg	283.0 + 283.0 + 283.0 + 217.0	283.0 + 283.0 + 283.0 + 283.0
	Shipping	kg	296.0 + 296.0 + 296.0 + 230.0	296.0 + 296.0 + 296.0 + 296.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A
	Precharged Amount	kg	590	640
	t-CO ₂ eq.	-	123.163	133.600
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 22.2 (7/8)	Ø 22.2 (7/8)
	Gas	mm (inch)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	70.2 / 71.2	70.3 / 71.2
	Sound Power Level (Outdoor Unit)	dB (A)	93.1 / 94.1	93.2 / 94.2
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64


ARUN922LTE6 / ARUN942LTE6
ARUN962LTE6



HP		92	94	96
Classification	Chassis	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB	UXB + UXB + UXB + UXB
	Combination Unit	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6 ARUN202LTE6	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6 ARUN222LTE6	ARUN242LTE6 ARUN242LTE6 ARUN242LTE6 ARUN242LTE6
Power Supply	Case 1	V / Ø / Hz	380 ~ 415, 3, 50	380 ~ 415, 3, 50
	Limit Range of Voltage (Case 1)	V	342 ~ 456	342 ~ 456
	Case 2	V / Ø / Hz	380, 3, 60	380, 3, 60
	Limit Range of Voltage (Case 2)	V	342 ~ 418	342 ~ 418
Cooling Capacity	Rated	kW	257.6	268.8
	Rated	Btu/h	879,000	917,200
Heating Capacity	Rated	kW	285.9	297.2
	Rated	Btu/h	975,200	1,013,600
Power Input (Cooling)	Rated	kW	70.55	74.60
Power Input (Heating)	Rated	kW	68.60	72.00
Efficiency	EER (Cooling COP)	W/W	3.65	3.62
	COP (Rated)	W/W	4.17	4.13
Power Factor (Cooling / Heating)	Rated		0.93 / 0.93	0.93 / 0.93
Outdoor Fan	Type	-	Propeller Fan	Propeller Fan
	Air Flow Rate (High)	m ³ /min x No.	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)	(320 × 1) + (320 × 1) + (320 × 1) + (320 × 1)
	Max. External Static Pressure	Pa	80	80
	Discharge Direction (Side / Top)	-	Top	Top
Outdoor Fan Motor	Drive	-	Direct	Direct
	Output	W x No.	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)	(900 × 2) + (900 × 2) + (900 × 2) + (900 × 2)
Compressor	Type	-	Hermetically Sealed Scroll	Hermetically Sealed Scroll
	Piston Displacement	cm ³ /rev	62.1 × 8	62.1 × 8
	Number of Revolution	rev./min	3,600 × 8	3,600 × 8
	Motor Output	W x No.	5,300 × 8	5,300 × 8
	Oil Type	-	FW68L (PVE)	FW68L (PVE)
Heat Exchanger	Fin Type	-	Wide Louver Plus	Wide Louver Plus
Dimensions	Net (W x H x D)	mm	(1,240 x 1,745 x 760) x 4	(1,240 x 1,745 x 760) x 4
	Shipping (W x H x D)	mm	(1,282 x 1,919 x 802) x 4	(1,282 x 1,919 x 802) x 4
Weight	Net	kg	283.0 + 283.0 + 283.0 + 283.0	283.0 + 283.0 + 283.0 + 283.0
	Shipping	kg	296.0 + 296.0 + 296.0 + 296.0	296.0 + 296.0 + 296.0 + 296.0
Exterior	Color	-	Morning Gray / Dawn Gray	Morning Gray / Dawn Gray
	RAL (Classic)	-	RAL 7038 / RAL 7037	RAL 7038 / RAL 7037
Refrigerant	Type	-	R410A	R410A
	Precharged Amount	kg	640	640
	t-CO ₂ eq.	-	133.600	133.600
	Control Type	-	Electronic Expansion Valve	Electronic Expansion Valve
Connecting Pipe	Liquid	mm (inch)	Ø 22.2 (7/8)	Ø 22.2 (7/8)
	Gas	mm (inch)	Ø 53.98 (2-1/8)	Ø 53.98 (2-1/8)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A)	70.4 / 71.4	71.0 / 72.0
	Sound Power Level (Outdoor Unit)	dB (A)	93.3 / 94.3	94.0 / 95.0
Connecting Cable	Communication Cable (VCTF-SB)	mm ² × cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Connectable Indoor Units Number	Max. (Conditional)	EA	64	64

1. Due to our policy of innovation some specifications may be changed without notification.
2. Capacities are based on the following conditions :
 - Cooling : Indoor 27°C DB / 19°C WB Outdoor 35°C DB / 24°C WB
 - Heating : Indoor 20°C DB / 15°C WB Outdoor 7°C DB / 6°C WB
 - Piping Length : Interconnected Pipe Length = 7.5 m
 - Elevation Difference (Outdoor ~ Indoor Unit) is 0 m.
3. Wiring cable size must comply with the applicable local and national codes.
 And "Electric characteristics" should be considered for electrical work and design.
 Especially the power cable and circuit breaker should be selected in accordance with that.
4. Power factor could vary less than $\pm 1\%$ according to the operating conditions.
5. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard.
 Refer to the model specifications for nominal conditions. (Power source and Ambient temperature, etc)
 Sound levels can be increased in accordance with installation and operating conditions. (Operating conditions include some functional condition like Static Pressure mode, air guide use, Room target temperature setting, etc and these functions are different in accordance with each model.)
 Sound level will vary depending on a range of factors such as the construction (Acoustic absorption coefficient) of particular room in which the equipment is installed.
 Sound values of combination model are calculated values based on sound results of independent models. Sound values can be increased owing to ambient or installation conditions during operation.

<Measurement Scene>

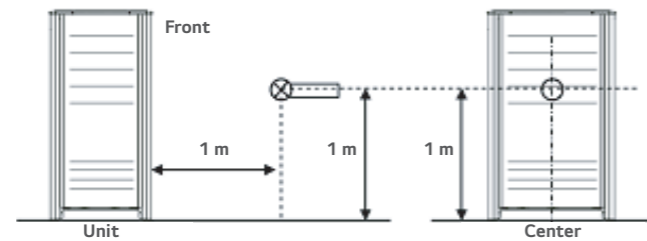

※ External appearance of unit could be different by each model.

6. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard.
7. Explanation of terms
 - EER : Energy Efficiency Ratio (Cooling)
 - IEER : Integrated Energy Efficiency Ratio
 - Cooling COP (=EER) : Coefficient Of Performance (Cooling)
 - COP : Coefficient Of Performance (Heating)
 - Heating COP : Coefficient Of Performance (Heating)
8. This product contains Fluorinated greenhouse gas. (R410A, GWP (Global warming potential) = 2,087.5)

MULTI VTM S

Highlight



Higher Energy Efficiency



High Reliability



Improved Convenience

- Air Cooled VRF Heat Pump
- Side Discharge Outdoor Unit


- Residential VRF




Smart Load Control Applied

Energy savings with MULTI V load control.

MULTI V S changes indoor air temperature continuously according to load, to save energy.



Startup Operation

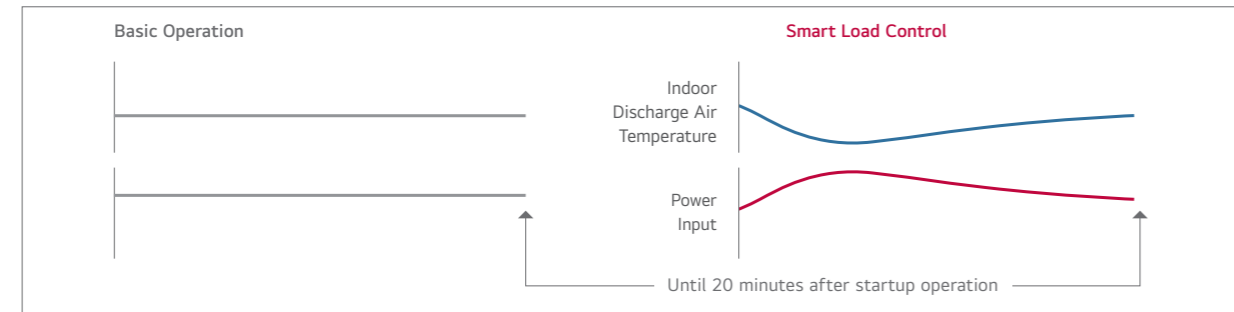


Max 10% Energy saving

- ※ Indoor air discharge temperature
- Energy efficiency increased by 3-step Smart Load Control during startup phase
- Discharge air temperature adjusted according to outdoor and indoor temperature
- Comfort level in cooling / heating operations ensured


Real Time Operation

Basic Operation

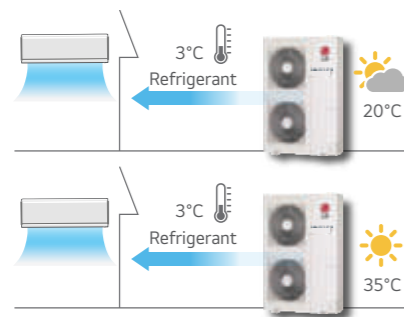

Fixed refrigerant temperature

Smart Load Control

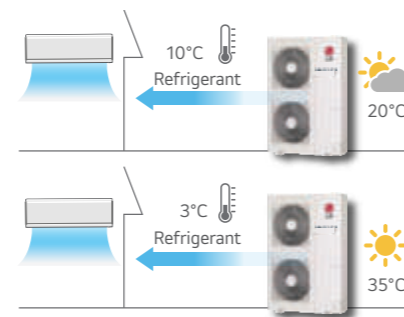


Fixed refrigerant temperature

Max 13% Energy saving

- ※ How to set up : By dip switch in outdoor unit (Referred to Product Data Book) factory default setting is off.
- Outdoor temperature condition : EER 100% / 75% / 50% / 25% = 35°C (DB) / 30°C (DB) / 25°C (DB) / 20°C (DB)
- Indoor temperature condition : 27°C (DB) / 19°C (WB)
- ※ Dual sensing (Temperature & humidity) smart load control is possible with remote controller. PREMTB101 (White) / PREMTBB11 (Black)

Inverter Twin Rotary & Inverter Scroll Compressor

High efficient compressor according to capacity

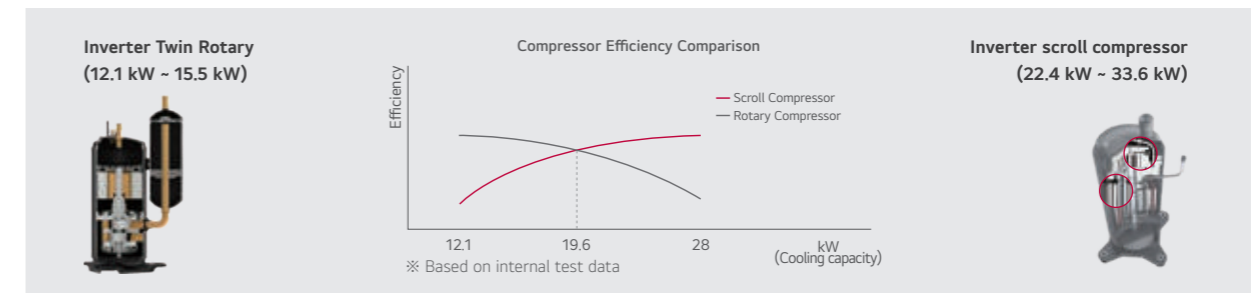

Inverter Twin Rotary

Concentrated Winding Motor
Oil path area is improved by increasing the extra stator cavity. Due to this, caloric value of motor is reduced, improving the cooling function of stator coil.


Twin Rotary Rotor
Upper and lower part rotor offset imbalance in shaft rotor rotation. Vibration and noise is reduced. Max torque load decreased compared to single rotor.

Surface Coating
Surface coating of outstanding abrasion resistance property on vane and crank shaft.



Inverter scroll compressor

Best-in-class Compressor Speed
- Rapid response capability
- Compact core design (Concentrated motor)
- Down to 15 Hz : Part load efficiency improvement



6 Bypass Valve
Compressor reliability is maximized with 6 Bypass Valve
- Prevent compressor damage due to excessively compressed refrigerant more efficiently than 4 Bypass valve





Direct Oil Injection
- Eliminate suction refrigerant gas heat loss through direct oil injection into compression chamber (Efficiency increases)
- Increased reliability with regulated oil supply

Scroll Profile
- The enhanced reliability with regulated oil supply
- Efficiency increases by expanding 96% Bypass area and 17% improved volume ratio by non-uniform scroll thickness


Optimal Heat Exchanger

Maximize efficiency according to different heat exchanger path by cooling and heating


Variable Heat Exchanger Circuit intelligently selects the optimal path, the smart path selection technology increase in the efficiency of both operations has been achieved.

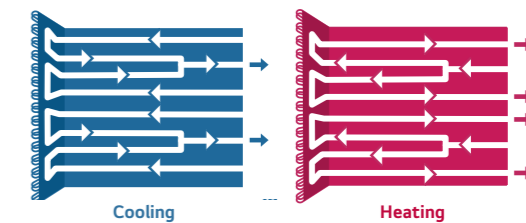

Efficiency performance

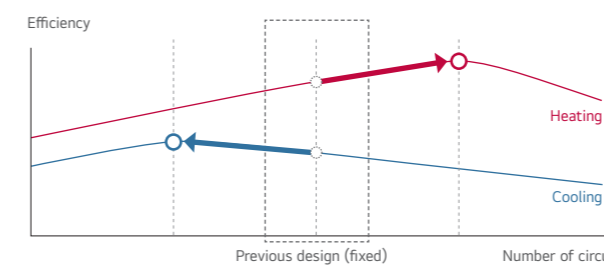


Efficiency up due to Fin shape

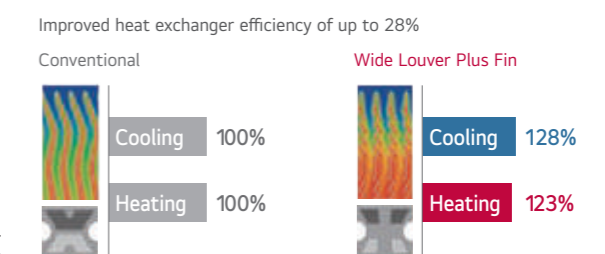

Refrigerant Components

Allows for superior performance and component durability

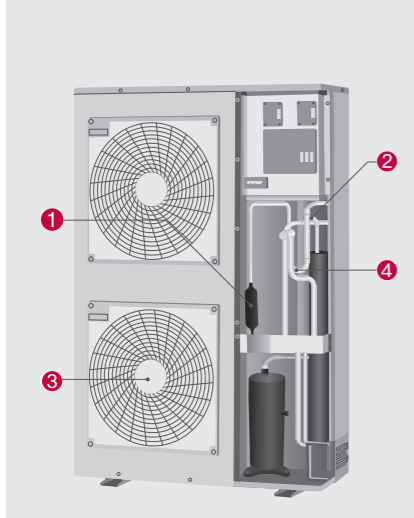

1 Cyclonic oil Separator

- Highly efficient oil separation by centrifuge using cyclonic methods
- High collection efficiency as well as outstanding resistance to high temperature and pressure

2 Large Volume Accumulator

- Improved reliability by adopting the large volume accumulator (38% volume up compared to conventional)
- Prevents the liquid refrigerant entering the compressor suction
- Maximize efficiency by optimal amount of refrigerant
- Protects compressor breakdown to increase product lifetime

3 BLDC Fan Motor

- The BLDC Fan motor is more efficient than a conventional AC motor.

4 Double Sub-cool Interchanger

- Reliability is enhanced by minimizing pressure drop due to high efficiency spiral structure and 2 times larger size
- Long pipe is possible (up to* 175 m) and high elevation (up to* 50 m)
- Reduction of indoor refrigerant noise level
- * Based on equivalent pipe length

MULTI V S improved reliability with advanced technology :

- Oil separator
- Accumulator
- Sub-cooling


Efficiency (%) vs Motor Speed (RPM) graph:

Motor Speed (RPM)	AC Motor Efficiency (%)	BLDC Motor Efficiency (%)
500	~60	~100 (40% improvement)
1,000	~70	~90 (20% improvement)

Diagram Labels: Refrigerant + Oil, Oil Separator, Accumulator, Double Sub-cool Interchanger.

Heat Exchanger with Wide Louver Plus Fin

Improved heat exchanger efficiency of up to 28%

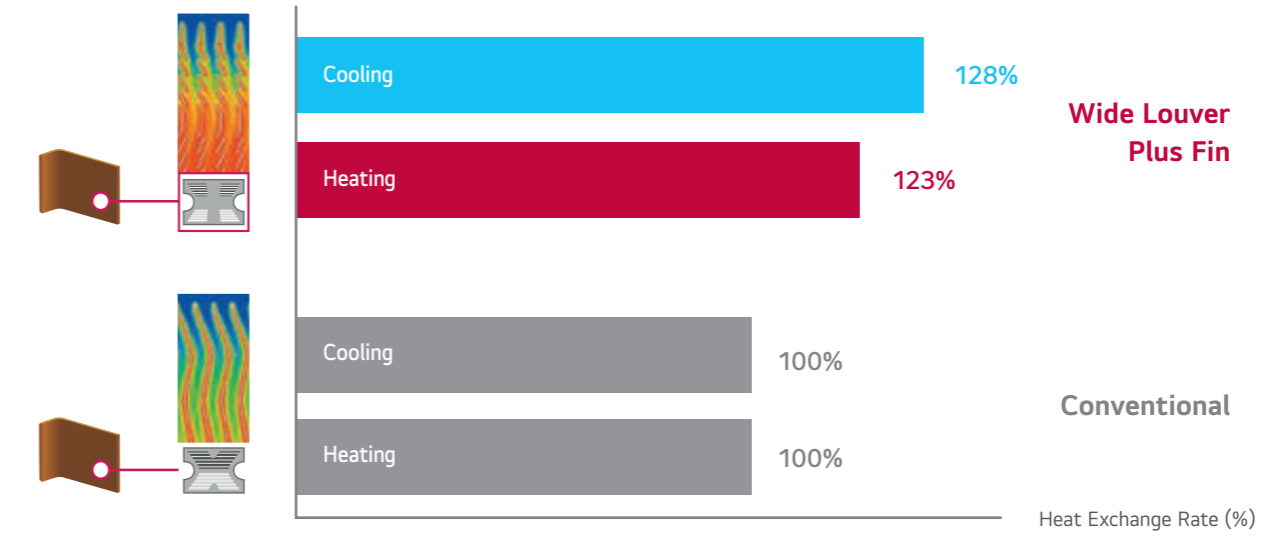


Smart Control

Pressure control applied for smart, quick and precise response to user's temperature request

Temperature + Pressure Control


Senses and controls pressure directly using pressure sensor for faster and more precise response to load variation.

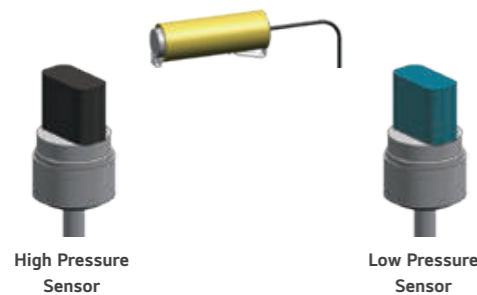

Quick Operating Response

Desired temperature can be reached up to 14% faster in cooling mode with pressure control, allowing more accurate control of indoor environment for maximized comfort.

* Specifications may vary for each model.

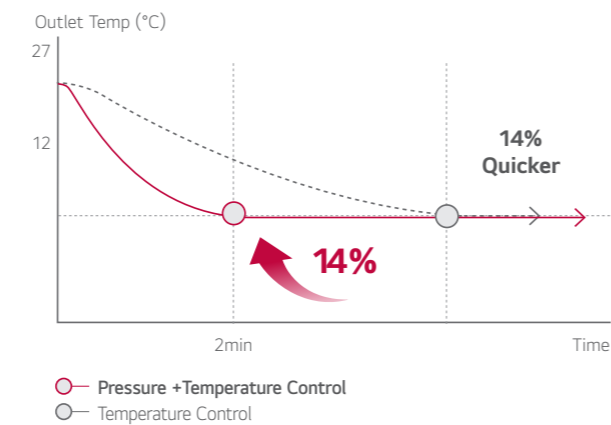

Piping Length

Increased piping length allows for flexible design and installation.

MULTI V S inverter technology and sub cooling control circuit technology allows flexibility in design and installation. The cooling system can be implemented more flexibly in a shop, office, and even high-rise building. Reducing the designer's work time and providing more efficient design.

Piping Capabilities

300 m Total piping length


50 m ODU - IDU Height difference

15 m IDU - IDU Height difference

150 m (175 m) Longest pipe length (Equivalent)

4 Way Piping



- Free design and installation by 4 way piping.

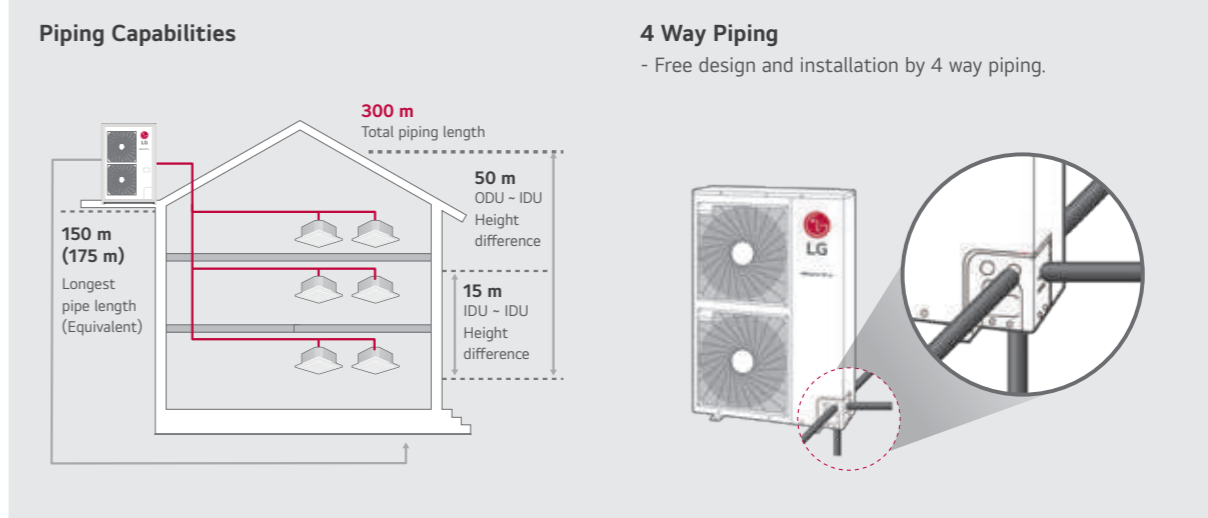

Low Noise Operation

Reduced noise level during operation with low noise functionality

During night mode, noise level can be reduced up to 14% in comparison with normal mode.

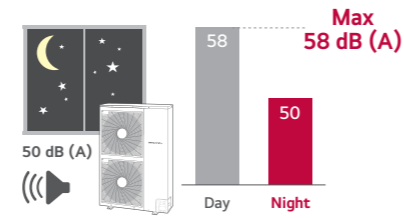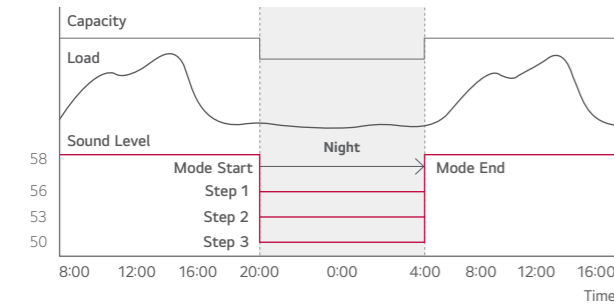

※ Normal mode noise level (28 kw) : 58 dB (A)
 ※ Night 3 step noise level (28 kw) : 56 dB (A), 53 dB (A), 50 dB (A)
 ※ Sound pressure tested by following conditions : 1 m distance / 1.5 m height


Fan Technology and RPM Control

External static pressure control enables outdoor unit to offer more flexibility in installations.

New axial fan offers higher air volume, increased static pressure, reduced noise and enhanced efficiency.



Fan Technology

The new axial fan has a mogul trailing edge, narrow hub blade and reverse hub, this provides a high efficiency, low noise, wide fan, as well as improving the air flow rate.

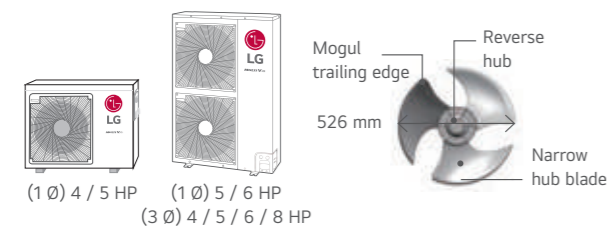


Fan RPM control

Due to the new shroud and ROM control, the air flows straight away from the fan even in high-rise buildings.

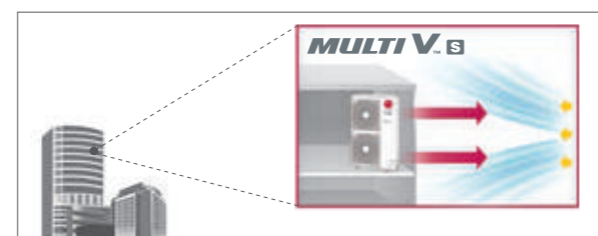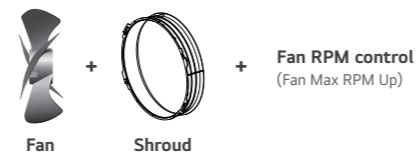

- Straight air flow
- New shroud adopted
- Performs high static pressure

Super cannon fan increases the air volume in 50 CMM and the noise level is decreased by 4 dB (A).

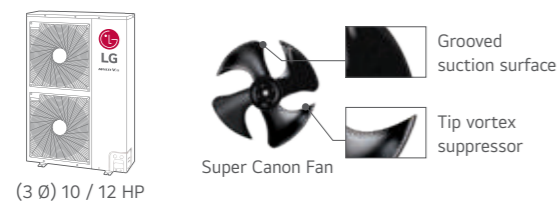


Upgraded Fault Detection and Diagnosis


Easy and convenient maintenance with self-diagnosis

The inclusion of FDD elements - Auto start-up, auto refrigerant check, black box functionality, simultaneous evaluation, and auto refrigerant collection, provides the optimal solution for user reliability and ease of maintenance.

- Auto commissioning mode
- Auto refrigerant collection
- Auto evaluation of refrigerant amount and charging
- Able to access LGMV (LG Monitoring View) by smartphone
- Black box function
- Piping & wiring error check-up
- FDD (Fault Detection and Diagnosis)

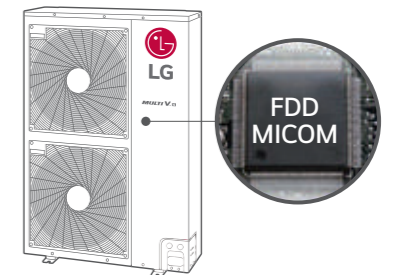


Total Piping Length

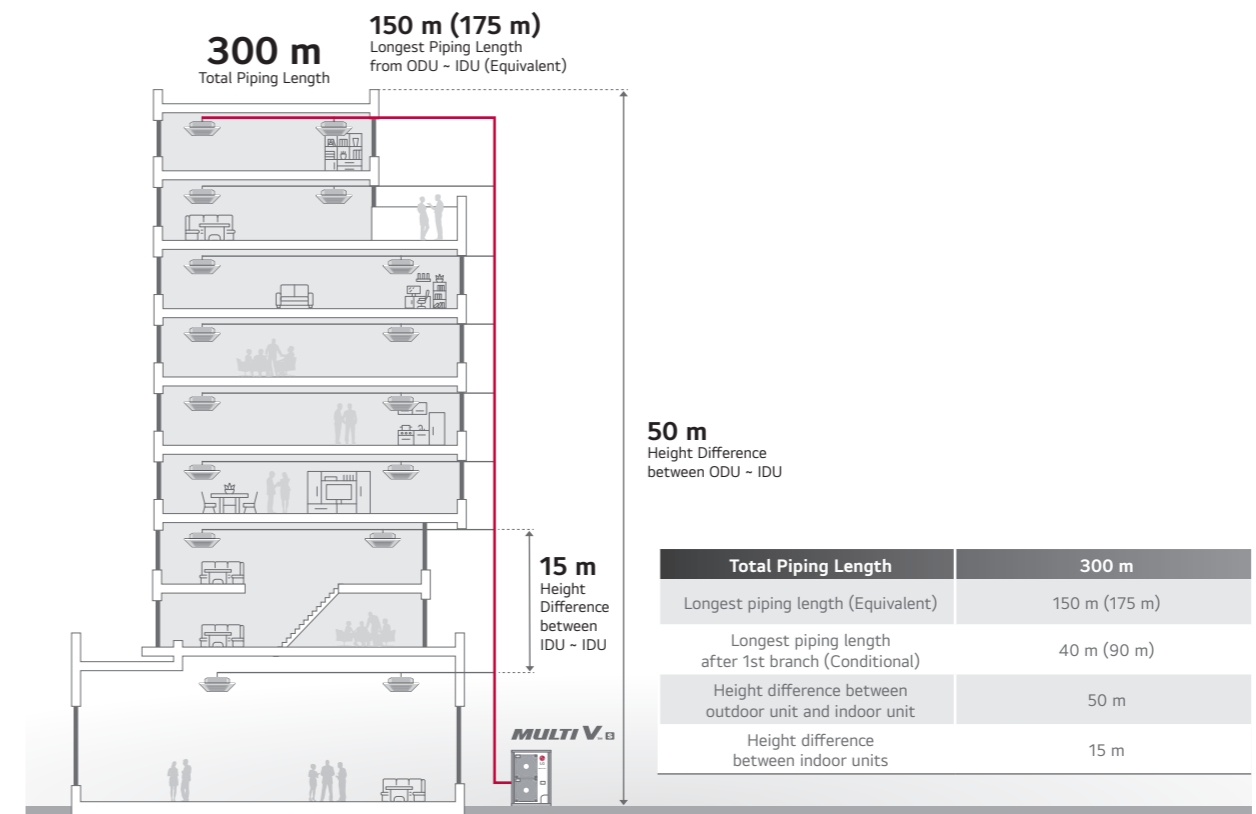

※ For Cooling Only Models
 - 80 m (3 HP), 85 m (4 HP), 100 m (5 / 6 HP) Total piping length
 - 50 m Longest piping length
 - 15 m ODU-IDU height difference
 - 7.5 m IDU-IDU height difference

Nomenclature

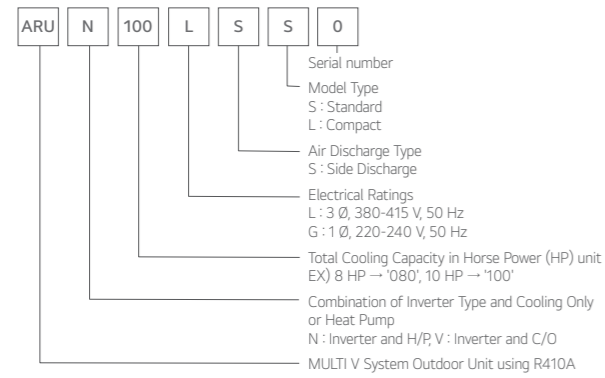


Outdoor Units Function

Category	Functions	MULTI V S
Key Refrigerant Components	Variable Path of Outdoor Unit HEX	-
	HiPOR™ (High Pressure Oil Return)	-
	Humidity Sensor	-
	Corrosion Resistance Black Fin	○
Special Function	Oil Sensor	-
	Dual Sensing	-
	Low Noise Operation	○
	High Static Mode of Outdoor Unit Fan	○
	Partial Defrosting	-
	Auto Dust Removal of Outdoor Unit (Fan Reverse Rotation)	-
	Indoor Cooling Comfort Mode Based Outdoor Temperature	○
	Smart Load Control (SLC) (Changing Indoor Discharge Air Temperature According to Load)	○
	Outdoor Unit Control Refer to Humidity	-
	Defrost / Deicing	○
Basic Function	High Pressure Switch	○
	Phase Protection	○
	Restart Delay (3-minutes)	○
	Self Diagnosis	○
	Soft Start	○
	Test Run Function	-
	Central Controller	AC Ez (Simple Controller)
	AC Ez Touch	PACEZA000
	AC Smart IV	PACS4B000
	AC Smart 5	PAC55A000
	ACP (Advanced Control Platform) IV	PACP4B000
	ACP (Advanced Control Platform) 5	PACP5A000
	AC Manager 5	PACM5A000
BNU (Building Network Unit)	ACP5 (w U60FT)	○
	ACP BACnet	PQNF17C0
IO Module (ODU Dry Contact)		PVDSMN000
PDI (Power Distribution Indicator)	Standard	PPWRDB000
	Premium	PQNUD1S40
Cool / Heat Selector		PRDSBM
Cycle Monitoring Device	LGMV	PRCTI0
	Mobile LGMV	PLGMVW100
Additional kit	Refrigerant Charging Kit	○ (Logical operation) Not applied to ARUB060GSS4
	Low Ambient Kit	-
	Variable Water Flow Valve Control Kit	-

※ ○ : Applied, - : Not Applied

ARUN080LSS0

[Unit : mm]

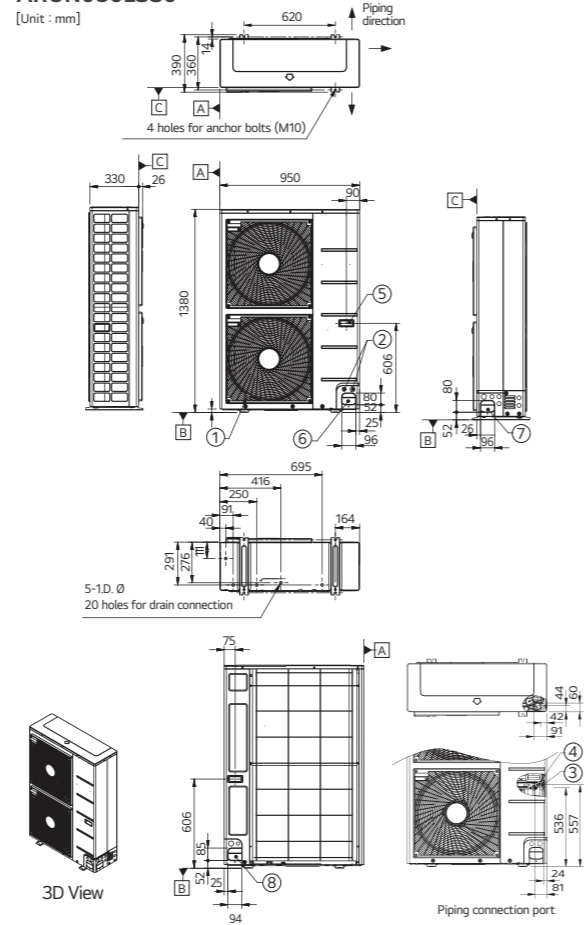


- Note
- Unit should be installed in compliance with the installation manual in the product box.
 - Unit should be grounded in accordance with the local regulation or applicable national codes.
 - All electrical components and materials to be supplied from the site must comply with the local regulations or international codes.
 - Electrical characteristics chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.


No.	Part name	Description
1	Air outlet	-
2	Power and communication cable hole	-
3	Gas pipe connection	Welding joint
4	Liquid pipe connection	Welding joint
5	Handle	-
6	Pipe routing hole (front)	-
7	Pipe routing hole (side)	-
8	Pipe routing hole (back)	-

Heat Pump


Cooling

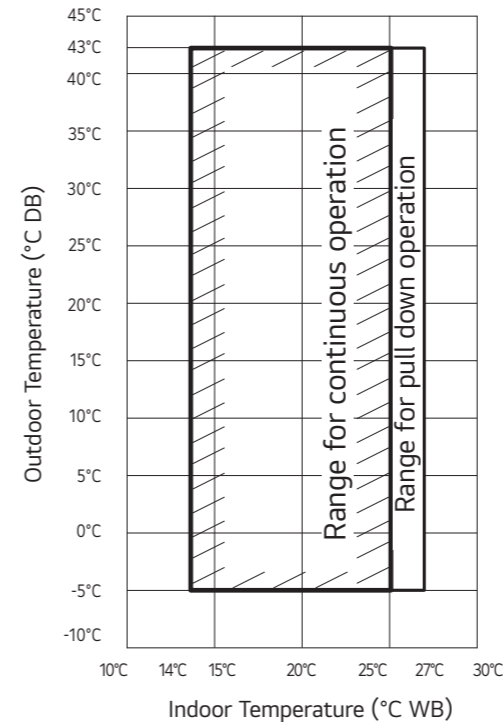

Heating

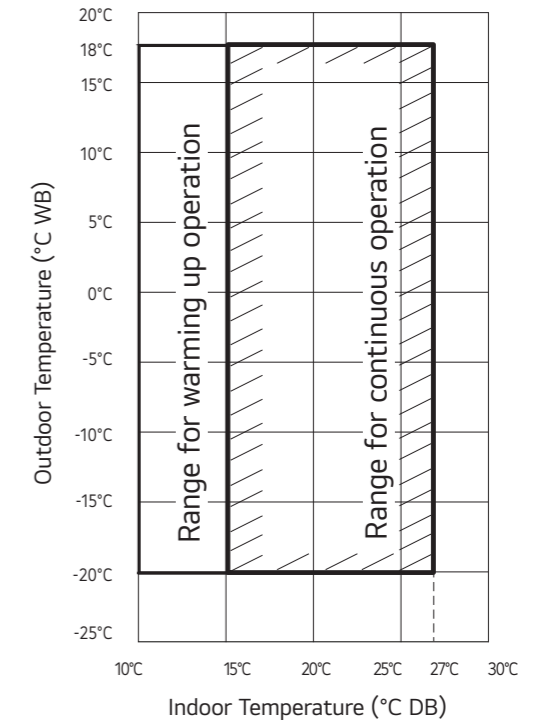

Position of Sound Level Measuring

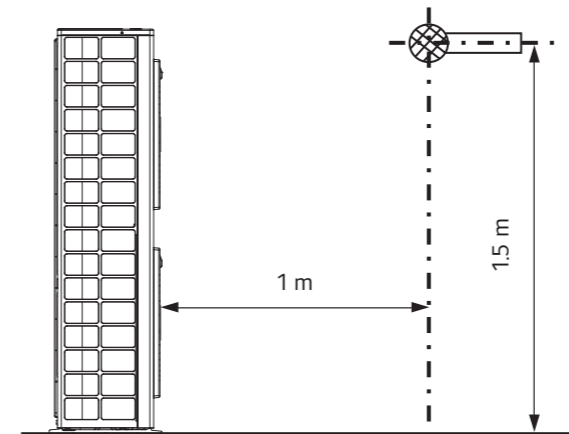

Note

- These figures assume the following operating conditions :
Equivalent piping length : 7.5 m
Level difference : 0 m

**ARUV030GSD5 / ARUV040GSD5
ARUV050GSD5 / ARUV060GSD5**



HP		3	4	5	6
Tick					
Model Name	Combination Unit	ARUV030GSD5	ARUV040GSD5	ARUV050GSD5	ARUV060GSD5
Power Supply	#1	220, 1, 60	220, 1, 60	220, 1, 60	220, 1, 60
	Limit Range of Voltage (#1)	V 198 - 242	V 198 - 242	V 198 - 242	V 198 - 242
#2		220 - 230 - 240, 1, 50	220 - 230 - 240, 1, 50	220 - 230 - 240, 1, 50	220 - 230 - 240, 1, 50
	Limit Range of Voltage (#2)	V 198 - 264	V 198 - 264	V 198 - 264	V 198 - 264
Cooling Capacity	Rated	kW 9.20	kW 11.00	kW 14.50	kW 16.00
		Btu/h 31,400	Btu/h 37,600	Btu/h 49,500	Btu/h 54,600
Power Input (Cooling)	Rated	kW 2.36	kW 2.89	kW 3.62	kW 4.5
Efficiency	EER (Rated)	W/W 3.90	W/W 3.81	W/W 4.01	W/W 3.56
Running Current	Maximum Running Current	A 19.0	A 23.0	A 25.1	A 29.0
Power Factor (Cooling/Heating)	Rated	- 0.93 / -	- 0.93 / -	- 0.93 / -	- 0.93 / -
	Type	- Axial Flow Fan	- Axial Flow Fan	- Axial Flow Fan	- Axial Flow Fan
Outdoor Fan	Air Flow Rate (High)	m ³ /min x No. 60 x 1	m ³ /min x No. 60 x 1	m ³ /min x No. 80 x 1	m ³ /min x No. 80 x 1
	Discharge direction (Side / Top)	- Side	- Side	- Side	- Side
Outdoor Fan Motor	Type	- BLDC	- BLDC	- BLDC	- BLDC
	Drive	- DC Inverter	- DC Inverter	- DC Inverter	- DC Inverter
Compressor	Output x Number	W x No. 124.2 x 1	W x No. 124.2 x 1	W x No. 198 x 1	W x No. 198 x 1
	Type	- Twin Rotary	- Twin Rotary	- LG Inverter Scroll	- LG Inverter scroll
	Piston Displacement	cm ³ /rev 20.8	cm ³ /rev 20.8	cm ³ /rev 31.6	cm ³ /rev 31.6
	Number of Revolution	rev/min 3,600	rev/min 3,600	rev/min 3,600	rev/min 3,600
	Motor Output x Number	W x No. 1,500 x 1	W x No. 1,500 x 1	W x No. 3,198 x 1	W x No. 3,198 x 1
	Starting Method	- DC Inverter Starting	- DC Inverter Starting	- DC Inverter Starting	- DC Inverter Starting
Heat Exchanger	Oil Type	- FW68D (PVE)	- FW68D (PVE)	- FW68D	- FW68D
	Type	- Fin & tube	- Fin & tube	- Fin & tube	- Fin & tube
Dimensions	Net (W x H x D)	mm 950 x 834 x 330	mm 950 x 834 x 330	mm 950 x 834 x 330	mm 950 x 834 x 330
	Shipping (W x H x D)	mm 1,147 x 919 x 461	mm 1,147 x 919 x 461	mm 1,147 x 919 x 461	mm 1,147 x 919 x 461
Weight	Net	kg 53.0	kg 53.0	kg 67.0	kg 67.0
	Shipping	kg 61.0	kg 61.0	kg 75.0	kg 75.0
Exterior	Color	- Warm Gray	- Warm Gray	- Warm Gray	- Warm Gray
	RAL (Classic)	- RAL 7044	- RAL 7044	- RAL 7044	- RAL 7044
Protection Device	Compressor / Fan Protection	- Over-heat Protection / Fan Driver Overload Protector	- Over-heat Protection / Fan Driver Overload Protector	- Heat Protection / Fan Driver Overload Protector	- Over-heat Protection / Fan Driver Overload Protector
	Inverter Protection	-	- Over-heat Protection / Over-current Protection	-	-
Refrigerant	Type	- R410A	- R410A	- R410A	- R410A
	Precharged Amount	kg 1,000	kg 1,000	kg 2,000	kg 2,000
	t-CO ₂ eq	-	-	4.175	4.175
Piping Connection Type	Liquid	- Flare	- Flare	- Flare	- Flare
	Gas	- Flare	- Flare	- Flare	- Flare
Connecting Pipe	Liquid	mm (inch) Ø 9.52 (3/8)	mm (inch) Ø 9.52 (3/8)	mm (inch) Ø 9.52 (3/8)	mm (inch) Ø 9.52 (3/8)
	Gas	mm (inch) Ø 15.88 (5/8)	mm (inch) Ø 15.88 (5/8)	mm (inch) Ø 15.88 (5/8)	mm (inch) Ø 19.05 (3/4)
Sound Pressure Level (Outdoor Unit)	Cooling / Heating	dB (A) 52.0 / -	dB (A) 52.0 / -	dB (A) 53.0 / -	dB (A) 56.0 / -
Measurement Standard (Pressure Level)	-	- ISO 3745	- ISO 3745	- ISO 3745	- ISO 3745
Connecting Cable	Communication Cable (VCTF-SB)	mm ² x cores 1.0 ~ 1.5 x 2	mm ² x cores 1.0 ~ 1.5 x 2	mm ² x cores 1.0 ~ 1.5 x 2	mm ² x cores 1.0 ~ 1.5 x 2
	Minimum Circuit Amperes (MCA)	A 20.2	A 20.2	A 22.8	A 26.4
Electrical Characteristic	Maximum Fuse Amperes (MFA)	A 25	A 25	A 32	A 40
	Total Over Current Amperes (TOCA)	A 21.3	A 21.3	A 25.1	A 29
	Comp. Rated Load Amperes (Cooling)	A 9.7	A 12	A 16.8	A 21.1
	Outdoor Fan Motor_Full Load Amperes (FLA)	A 0.5	A 0.5	A 0.9	A 0.9
Connectable Indoor Units Number	Max. (Conditional)	EA 5	EA 6	EA 8	EA 9

1. Capacities are based on the following conditions:
 - Cooling Temperature : Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB
 Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB
 Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 - Piping Length : Interconnected Pipe Length = 7.5 m
 - Difference Limit of Elevation (Outdoor ~ Indoor Unit) is Zero.

2. The maximum combination ratio is 130%.
 3. Wiring cable size must comply with the applicable local and national codes.
 4. Due to our policy of innovation some specifications may be changed without notification.
 5. Sound Level Values are measured at Anechoic chamber. Therefore, these values can be increased owing to ambient conditions during operation.
 6. Power factor could vary less than ±1% according to the operating conditions.

**ARUN080LSS0 / ARUN100LSS0
ARUN120LSS0**



HP		8	10	12
Tick				
Model Name	Combination Unit	ARUN080LSS0	ARUN100LSS0	ARUN120LSS0
Capacity (Rated) ¹⁾	Cooling	kW 22.4	kW 28.0	kW 33.6
		kcal/h 19,300	kcal/h 24,100	kcal/h 28,900
Input (Rated) ¹⁾	Heating	kW 25.2	kW 31.5	kW 37.8
		kcal/h 21,700	kcal/h 27,100	kcal/h 32,500
Power Factor	Rated	0.93	0.93	0.93
		Casing Color	Warm Gray	Warm Gray
Heat Exchanger	Type	Wide Louver Plus	Wide Louver Plus	Wide Louver Plus
		Hermetically Sealed Scroll	Hermetically Sealed Scroll	Hermetically Sealed Scroll
Compressor	Piston Displacement	cm ³ /rev 43.8	cm ³ /rev 62.1	cm ³ /rev 62.1
	Number of Revolution	rev/min 3,600	rev/min 3,600	rev/min 3,600
	Motor Output	W 4,200	W 5,300	W 5,300
	Starting Method	- Direct On Line	- Direct On Line	- Direct On Line
	Oil Type	- FVC68D (PVE)	- FVC68D (PVE)	- FVC68D (PVE)
	Oil Charge	cc 2,400	cc 2,600	cc 3,400
Fan	Type	Propeller Fan	Propeller Fan	Propeller Fan
		Motor Output x Number	W x No. 124 x 2	W x No. 250 x 2
Pipe Connctions	Liquid	mm (inch) Ø 9.52 (3/8)	mm (inch) Ø 9.52 (3/8)	mm (inch) Ø 12.7 (1/2)
		mm (inch) Ø 19.05 (3/4)	mm (inch) Ø 22.2 (7/8)	mm (inch) Ø 28.58 (1-1/8)
Dimensions (W x H x D)	mm	950 x 1,380 x 330	1,090 x 1,625 x 380	1,090 x 1,625 x 380
		inch 37-13/32 x 54-11/32 x 13	inch 42-29/32 x 63-31/32 x 14-31/32	inch 42.9 x 64.0 x 15.0
Net Weight	kg	115	142	155
		lbs 254	312	340
Sound Pressure Level	Cooling	dB (A) 57	dB (A) 58	dB (A) 60
		Heating	dB (A) 57	dB (A) 58
Protection Devices	High Pressure Protection	Compressor / Fan	Compressor / Fan	Compressor / Fan
		Inverter	Inverter	Inverter
Communication Cable	No. x mm ² (VCTF-SB)	2 C x 1.0 ~ 1.5	2 C x 1.0 ~ 1.5	2 C x 1.0 ~ 1.5
		Refrigerant Name	R410A	R410A
Refrigerant	Precharged Amount	kg 3.5	kg 4.5	kg 6.0
		lbs 7.7	lbs 9.9	lbs 13.2
Power Supply	V / Ø / Hz	380 - 415, 3, 50	380 - 415, 3, 50	380 - 415, 3, 50
		380, 3, 60	380, 3, 60	380, 3, 60
Number of Maxmum Connectable Indoor Units ²⁾		13	16	20

1. Capacities are based on the following conditions:
 - Cooling Temperature : Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB
 Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB
 - Heating Temperature : Indoor 20°C (68°F) DB / 15°C (59°F) WB
 Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB
 - Piping Length : Interconnected Pipe Length = 7.5 m
 - Difference Limit of Elevation (Outdoor ~ Indoor Unit) is Zero.
 2. The maximum combination ratio is 130%.
 3. Wiring cable size must comply with the applicable local and national codes.
 4. Due to our policy of innovation some specifications may be changed without notification.
 5. Sound Level Values are measured at Anechoic chamber. Therefore, these values can be increased owing to ambient conditions during operation.
 6. Power factor could vary less than ±1% according to the operating conditions.

INDOOR UNITS

072 ~ 141

WALL MOUNTED

CEILING MOUNTED CASSETTE

CEILING MOUNTED
ROUND CASSETTE

CEILING CONCEALED DUCT

FRESH AIR INTAKE

CEILING & FLOOR CONVERTIBLE
CEILING SUSPENDED

CONSOLE & FLOOR STANDING

FLOOR STANDING (PAC)





Features & Benefits

- 6 different vane control can be programmed via the remote controller.
- Easily detachable full surface cover helps to clean the air conditioner.
- Drain pipe can be easily hidden from sight.

Key Applications

- Retail
- Hotel
- Restaurant
- Multi-family Residence
- Office

	WALL MOUNTED	STANDARD
Smart	Wi-Fi	○
Energy Efficiency	Energy Display	○
Fast Cooling & Heating	Jet Cool	○
	Auto Swing (Up & Down)	○
Health	Ionizer	○ (up to 24,000 BTU)
	Pre Filter	○
	Auto Cleaning	○
Comfort	Sleep Mode	○
	Timer (On / Off)	○
	Timer (Weekly)	○
	Two Thermistor Control	○
	Group Control	○

※ ○: Applied, - : Not applied

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.

ThinQ

Search "ThinQ" on Google store or the App Store to download the app.


Integrated Home Appliances Control

Control / Monitor all your LG appliances from one place.




Easy Registration and Log-in


Follow the easy set-up steps that will activate ThinQ's user-friendly features.

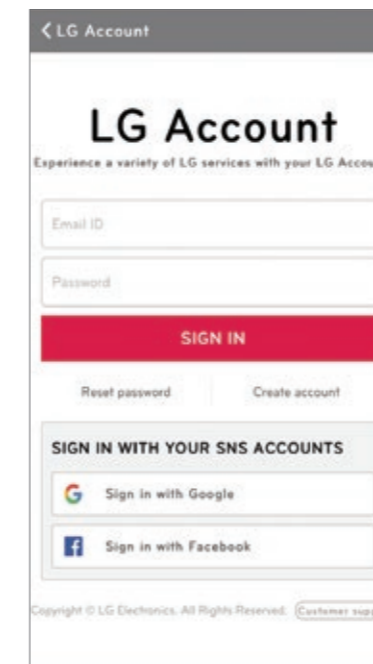

Simple operation for various functions

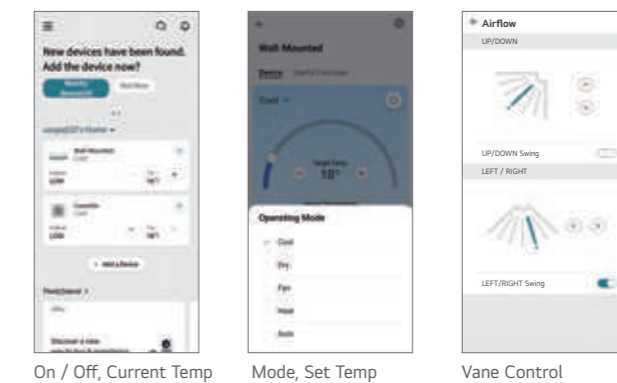

Straight forward Management

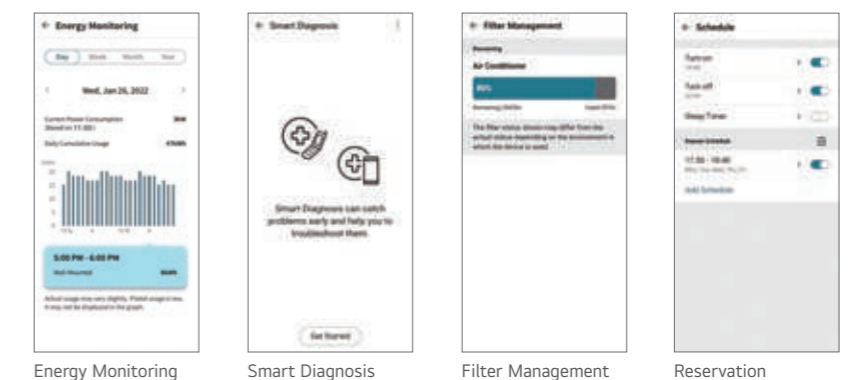

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.

ThinQ

Search "ThinQ" on Google store or the App Store to download the app.

Access Your Air Conditioner Anytime and from Anywhere with a Wi-Fi equipped device and LG's exclusive control app, ThinQ.



Wi-Fi Connectivity


Each user can set and save temperature and fan speed preferences in the ThinQ app. If a household has more than one indoor unit, separate temperature settings can be set for each unit.

Multiple Devices



※ Can be controlled by multiple users, but not simultaneously.

Multi-Control

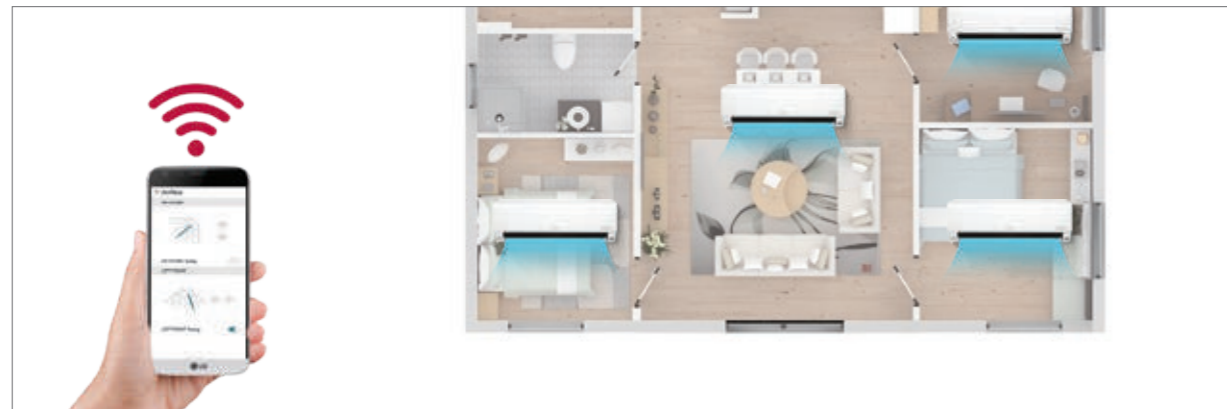

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


Ionizer^{PLUS}

Reduces harmful particles by infusing the air passing through the Air-conditioner with over 8 millions ions.

※ Specifications may vary for each model.
 ※ Depending on the experimental conditions.


Reduction and Deodorization (Utilizes Over 8 Million Ions)

Ionizer+ reduces E.coli and Staphylococcus in the surface with over 8 million ions.

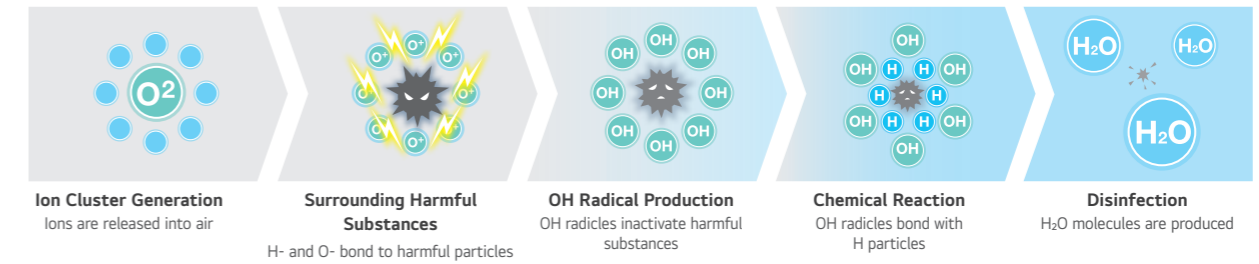


Reduction Performance Evaluations

Reduce Bacteria E.coli over 99.9% in 20 min. and staphylococcus over 99.9% in 60 min.

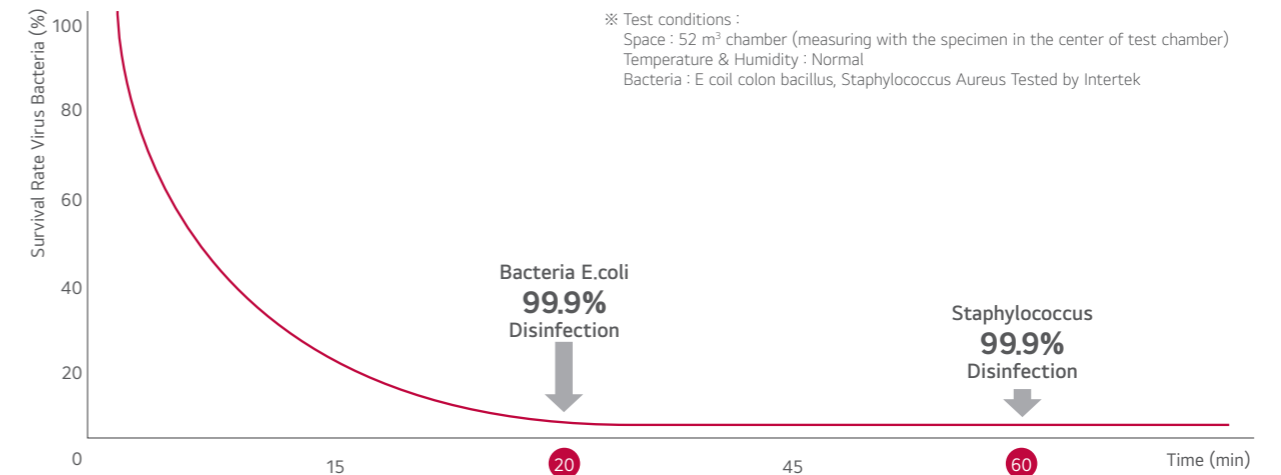

2.1 Odor Strength Decrease in 60 minutes

An odor of measured as 2 European odor units (ouE/m³) or less indicates that the level of odor falls within permissible limits.

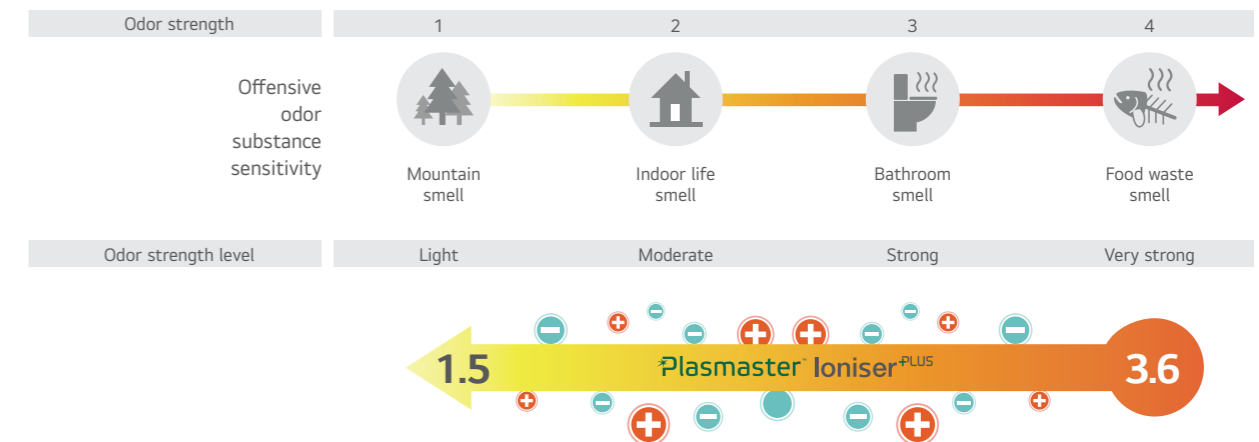

Odor strength reduce 3.6 → 1.5 / The odor floating in the room as well as curtain and clothes.

※ Test conditions Space : 8 m³ chamber
 Temperature & Humidity : Normal
 Tested by Intertek

Auto Cleaning

The unit has a self-cleaning function that dries the heat exchanger before cleaning the interior.


Pain Point

The main cause of odor within air conditioners is mold and bacteria growing on the heat exchanger. These germs can spread when the heat exchanger is wet.




Cleans Filter with Regular Airflow

The comprehensive auto cleaning function prevents the formation of bacteria and mold on the heat exchanger.

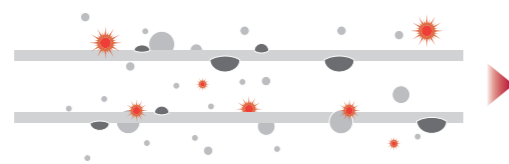

The auto cleaning function prevents potentially harmful substances from forming on the surface of the heat exchanger

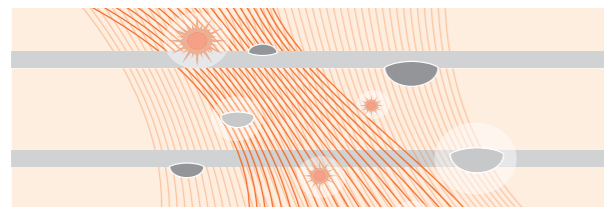


The indoor environment remains odorless with the advanced deodorizing function.



By preventing pollution of the heat exchanger caused by various germs and bacteria, performance and lifespan of the air conditioner can be increased by 10 years.

Installation Support Clip

A support clip creates adequate space between the wall and the unit for easier installation.

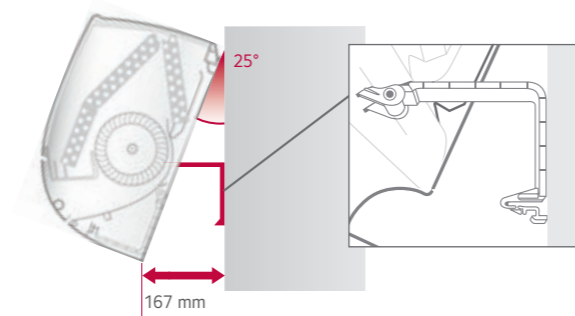


Auto Swing

Cool air extends to the entire room regardless of where the unit is situated.

※ Specifications may vary for each model.

6-step Vane Control up to 70°


The vertical vane, which moves up and down, has 6 different settings including full-auto swing.

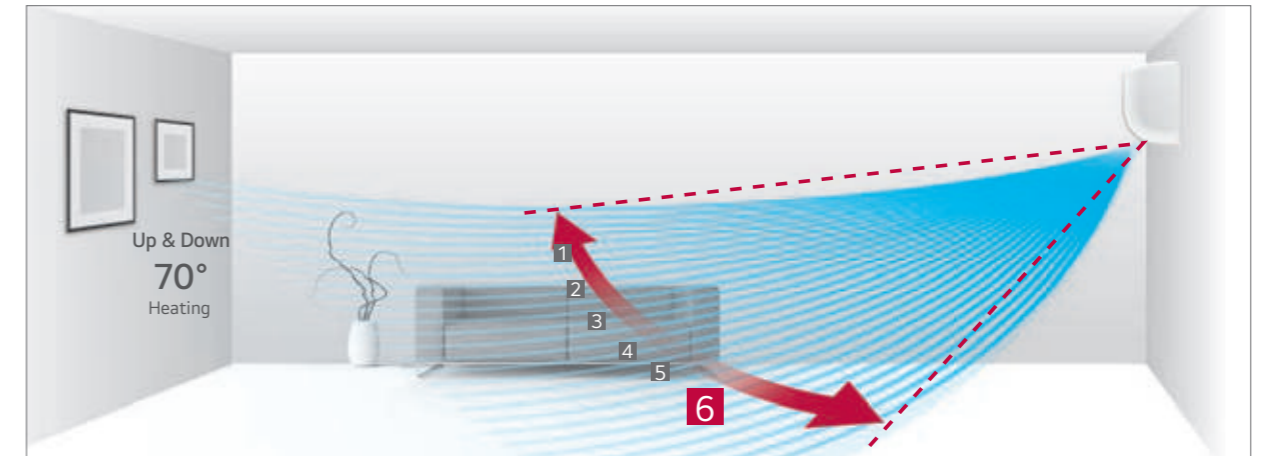

※ Angle can be different from each model and working mode.

Control up to 110°

Louver can be adjusted manually to extend left and right swing to 110 degrees.

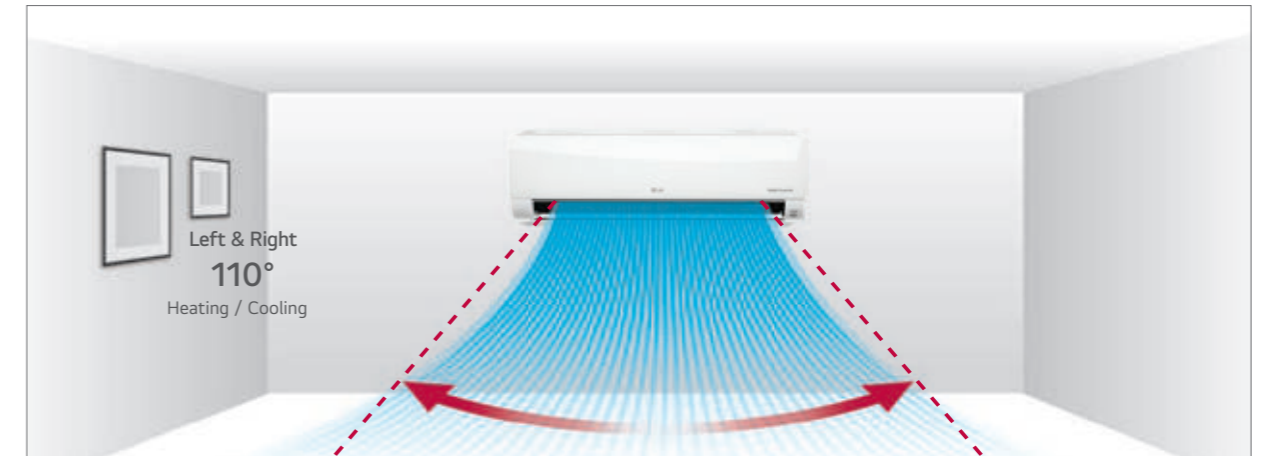

※ Angle can be different from each model and working mode.

Easy and Simple Control

Airflow direction can be changed by ThinQ Wi-Fi app.

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.



Up / Down Swing


Jet Cool

LG air conditioners provide optimized high-speed airflow, which can cool rooms faster while delivering cool air evenly in every direction.

※ Specifications may vary for each model.
 ※ Depending on the experimental conditions.

One Click "Jet Mode"

Reduces the temperature of outflowing air to 18°C for 30 minutes with just one click.

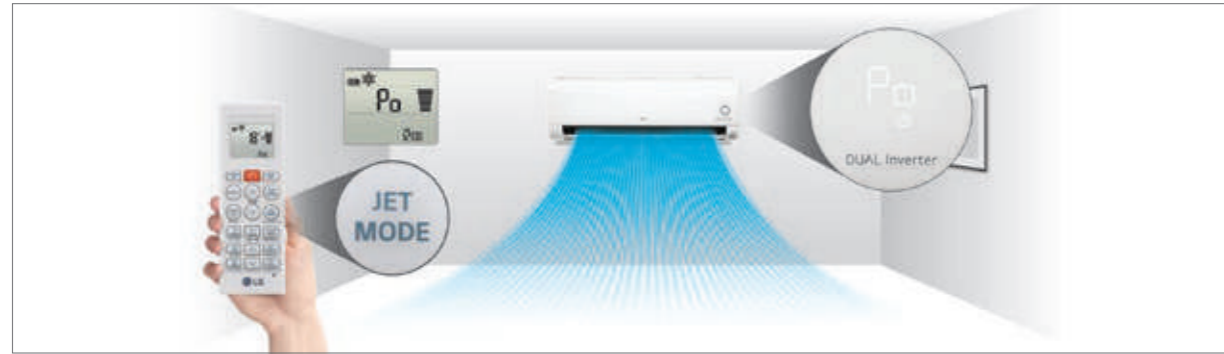

More Powerful Performance


By reducing the second vortex, which decreases airflow within the air outlet, and enlarging the fan size.



Scheduled Function

You can set the daily temperature, fan speed, the operation mode and time for two weeks.

※ This function is for wired remote controller only.
 ※ Wired remote controller is need to be separately purchased.

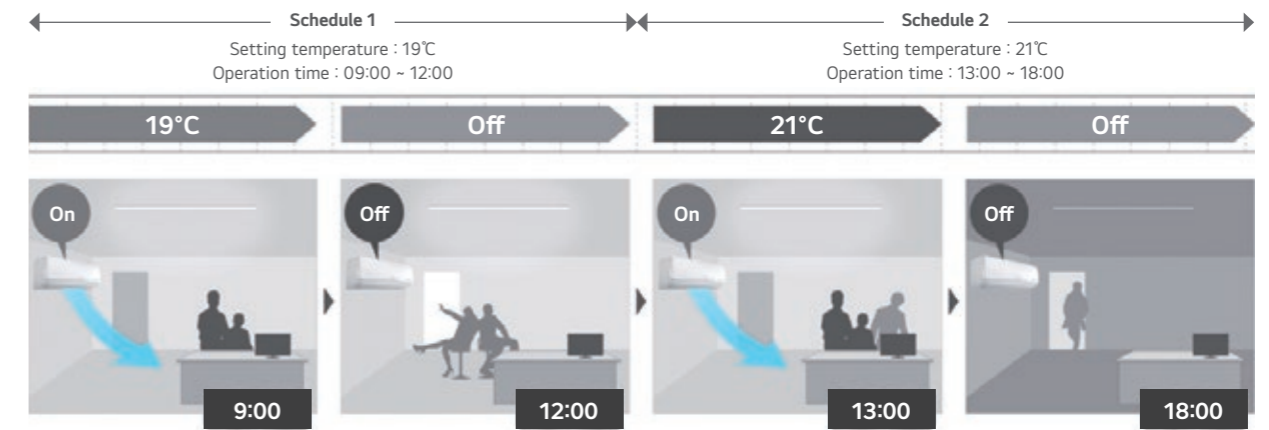

Two Thermistors Control

The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.



Group Control

Group control by remote controller (PREMTB101 / PREMTBB11) has more functions than previous model.



ARNU05GSJ*4 / ARNU07GSJ*4 / ARNU09GSJ*4
ARNU12GSJ*4 / ARNU15GSJ*4



MODEL		UNIT	ARNU05GSJ*4	ARNU07GSJ*4	ARNU09GSJ*4	ARNU12GSJ*4	ARNU15GSJ*4
Cooling Capacity		kW	1.6	2.2	2.8	3.6	4.5
Heating Capacity		kW	1.8	2.5	3.2	4.0	5.0
Power Input (H / M / L) Nominal		W	11 / 10 / 9	12 / 11 / 9	13 / 12 / 9	15 / 13 / 11	23 / 18 / 11
Exterior Color			White	White	White	White	White
RAL Code			RAL 9016	RAL 9016	RAL 9016	RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189	818 x 316 x 189
	Shipping	mm	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249	892 x 381 x 249
Fan							
		Type	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
		Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	30 x 1
		Air Flow Rate (H / M / L)	m ³ /min	6.8 / 6.5 / 5.9	7.2 / 6.8 / 5.9	7.8 / 7.2 / 5.9	8.5 / 7.8 / 6.8
		Motor Type	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 16 (5/8)	Ø 16 (5/8)	Ø 16 (5/8)	Ø 16 (5/8)	Ø 16 (5/8)
Weight	Body	kg	8.4	8.4	8.4	8.4	8.4
Sound Pressure Levels (H / M / L)		dB (A)	30 / 29 / 28	32 / 30 / 28	34 / 32 / 28	37 / 34 / 30	42 / 39 / 32
Sound Power Levels (H / M / L)		dB (A)	45 / 43 / 42	46 / 45 / 42	48 / 46 / 42	51 / 48 / 45	55 / 52 / 45
Power Supply		Ø / V / Hz	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60
Transmission Cable		mm ²	1.0 ~ 1.5 × 2 C	1.0 ~ 1.5 × 2 C	1.0 ~ 1.5 × 2 C	1.0 ~ 1.5 × 2 C	1.0 ~ 1.5 × 2 C

*N or C can applied which has little bit different shape of panel.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU05GSJ*4	ARNU07GSJ*4	ARNU09GSJ*4	ARNU12GSJ*4	ARNU15GSJ*4
Drain Pump			-		
Cassette Cover			-		
Refrigerant Leakage Detector			PRLDNVSO (R410a)		
EEV Kit			PRGK024A0		
Multi-tenant Power Module			PINPMB001		
Robot Cleaner			-		
Pre Filter (Washable)			○		
Ion Generator			○		
CO ₂ Sensor			-		
Ventilation Kit			-		
IR Receiver			-		
Zone Controller			-		
Dry Contact (with Additional Accessory)			PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)			○		
Wi-Fi			○		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GSK*4 / ARNU24GSK*4



MODEL		UNIT	ARNU18GSK*4	ARNU24GSK*4
Cooling Capacity		kW	5.6	7.1
Heating Capacity		kW	6.3	7.5
Power Input (H / M / L) Nominal		W	32 / 26 / 16	39 / 26 / 16
Exterior Color			White	White
RAL Code			RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	975 x 354 x 209	975 x 354 x 209
	Shipping	mm	1,063 x 420 x 274	1,063 x 420 x 274
Fan				
		Type	Cross Flow Fan	Cross Flow Fan
		Motor Output x Number	W x No.	58 x 1
		Air Flow Rate (H / M / L)	m ³ /min	14.0 / 12.0 / 10.5
		Motor Type	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 16 (5/8)	Ø 16 (5/8)
Weight	Body	kg	12.2	12.2
Sound Pressure Levels (H / M / L)		dB (A)	43 / 39 / 34	46 / 41 / 34
Sound Power Levels (H / M / L)		dB (A)	59 / 56 / 52	63 / 56 / 52
Power Supply		Ø / V / Hz	1, 220 - 230 - 240, 50 / 60	1, 220 - 230 - 240, 50 / 60
Transmission Cable		mm ²	1.0 ~ 1.5 × 2 C	1.0 ~ 1.5 × 2 C

*N or C can applied which has little bit different shape of panel.

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU18GSK*4	ARNU24GSK*4
Drain Pump		-
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVSO (R410a)
EEV Kit		PRGK024A0
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		○
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		○

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU30GSVA4 / ARNU36GSVA4



MODEL		UNIT	ARNU30GSVA4	ARNU36GSVA4
Cooling Capacity		kW	8.8	10.4
Heating Capacity		kW	9.4	10.8
Power Input (H / M / L)		Nominal W	54 / 43 / 31	85 / 51 / 36
Exterior Color			White	White
RAL Code			RAL 9016	RAL 9016
Dimensions (W x H x D)	Body	mm	1,190 x 346 x 265	1,190 x 346 x 265
	Shipping	mm	1,265 x 432 x 335	1,265 x 432 x 335
Fan		Type	Cross Flow Fan	Cross Flow Fan
		Motor Output x Number W x No.	113 x 1	113 x 1
		Air Flow Rate (H / M / L) m ³ /min	23.0 / 20.0 / 17.0	26.0 / 23.0 / 19.0
		Motor Type	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 16 (5/8)	Ø 16 (5/8)
Weight	Body	kg	16.6	16.6
Sound Pressure Levels (H / M / L)		dB (A)	49 / 44 / 42	52 / 47 / 43
Sound Power Levels (H / M / L)		dB (A)	60 / 60 / 56	63 / 60 / 58
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable		mm ²	1.0 ~ 1.5 × 2 C	1.0 ~ 1.5 × 2 C

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU30GSVA4	ARNU36GSVA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNV50 (R410a)	
EEV Kit	-	-
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	-
Pre Filter (Washable)	○	
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with Additional Accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)	○	
Wi-Fi	PWFMD200 ¹⁾	

※ ○ : Applied, - : Not applied
 Option : Refer to model name in table
 1) External installation only



Features & Benefits

- New dual vane 4 way cassette allows comfortable air flow
- Full 3D Turbo fan decreases air resistance, providing high air flow and low sound levels.

Key Applications

- Retail
- School
- Office
- Hotel
- Dormitory
- Restaurant

CASSETTE		4 WAY	2 WAY	1 WAY
Smart	Wi-Fi	○	○	○
Energy Efficiency	Human Detect Sensor	○	-	-
	Drain Pump	○	○	○
Comfort	Sleep Mode	○	○	○
	Timer (On / Off)	○	○	○
	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○


※ ○: Applied, -: Not applied

4 Way Air Flow with New Design


New Excellent Technology (NET) certifies new 4 way dual vane design that promotes comfortable and convenient airflow.



***New Types Wind**

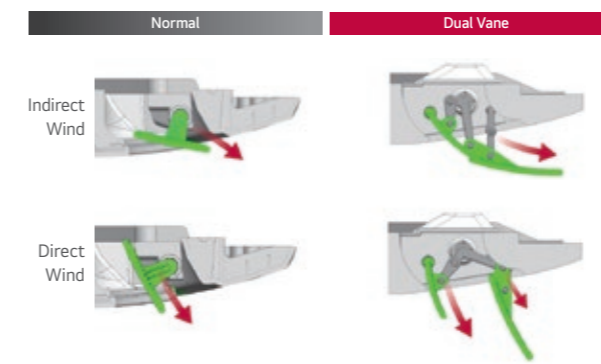

***6 Airflows Mode**

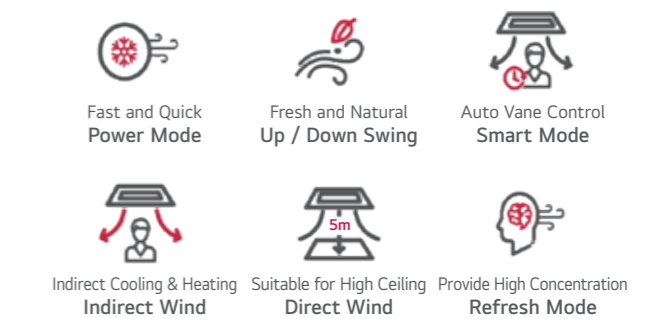


Brighter Color

Color enhancement allows cassette to blend in to most interior ceiling spaces.



Wide Design

Bigger inlet and outlet make faster cooling / heating airflow.

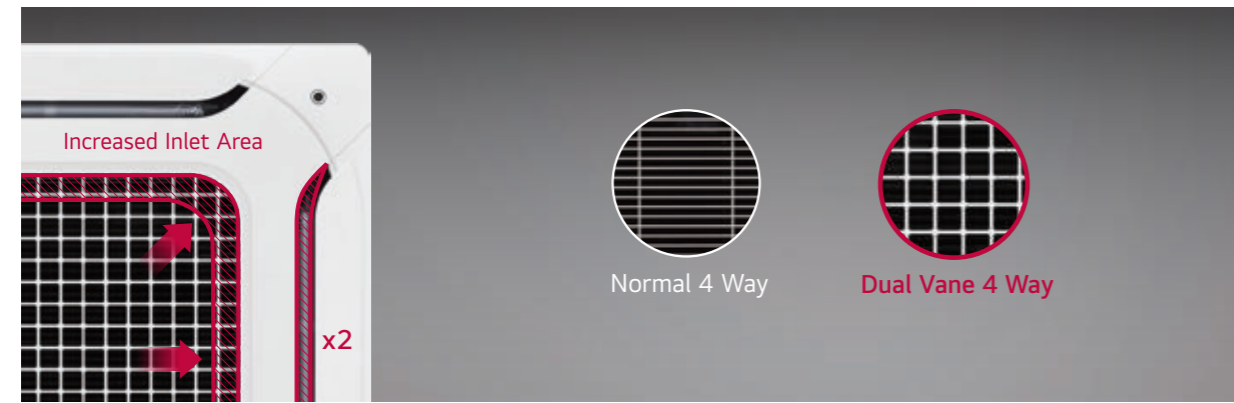


Full 3D Turbo Fan

Full 3D Turbo fan decreases air resistance, so it creates high efficiency and reduces noise level.



High Efficiency Heat Exchanger (HEX)

Ø 5 High Density Heat Exchanger increases cooling / heating efficiency by 10%.

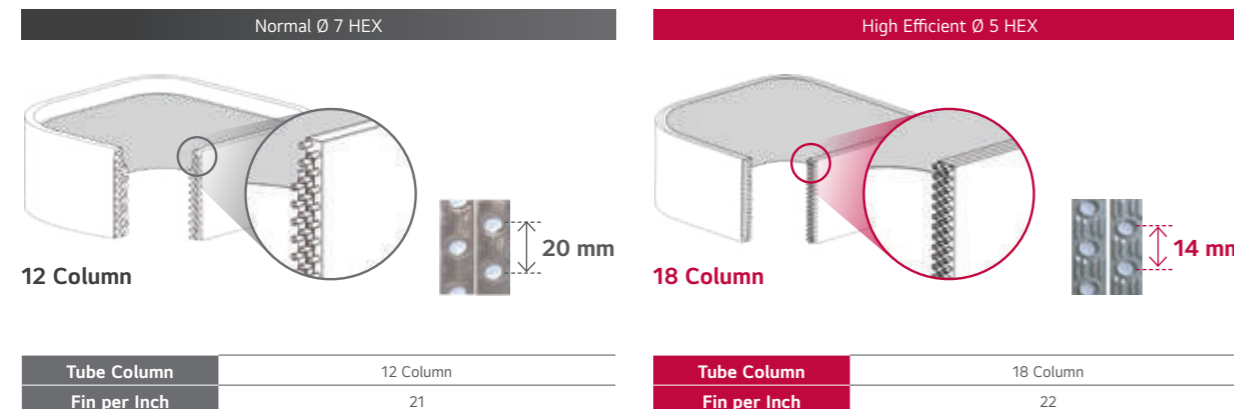

Ceiling to Floor Temperature Sensing

Dual vane 4 way cassette provides comfort air with a special sensor that senses both ceiling and floor temperature.



Independent Control Air Flow

Provides users with direct or indirect air flow preferences.

Indirect air flow




Direct air flow



Human Detection for Optimized Efficiency

Human sensor detection helps to maximize energy saving by switching on & off the system.

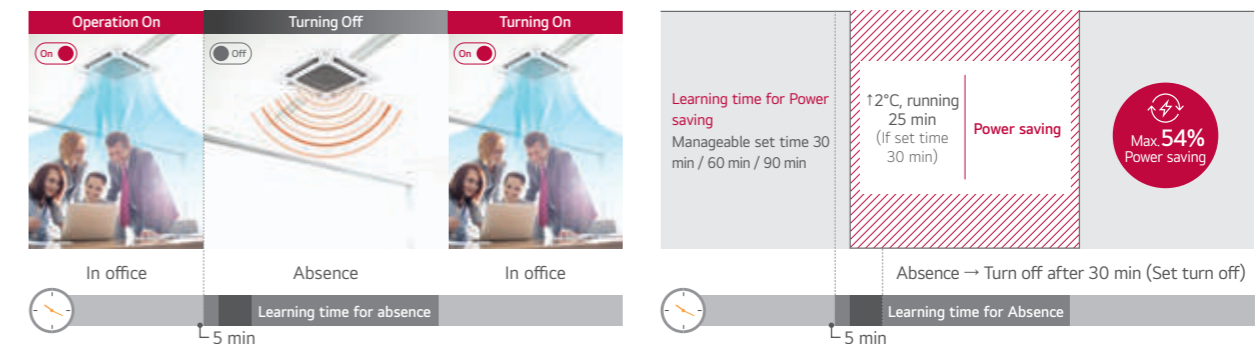

※ Smart Dual Vane indoor unit '19 line up.
 ※ Data based on actual test of LG, single product 2 hours measurement result. (Cooling 26°C, strong wind)

High-performance Air Cleaning


Air cleaning function provides fresh and filtered air.



Convenient & Powerful 5-step Air Purification

Air purifying system with one-touch air cleaning filter.

Air Purification Kit

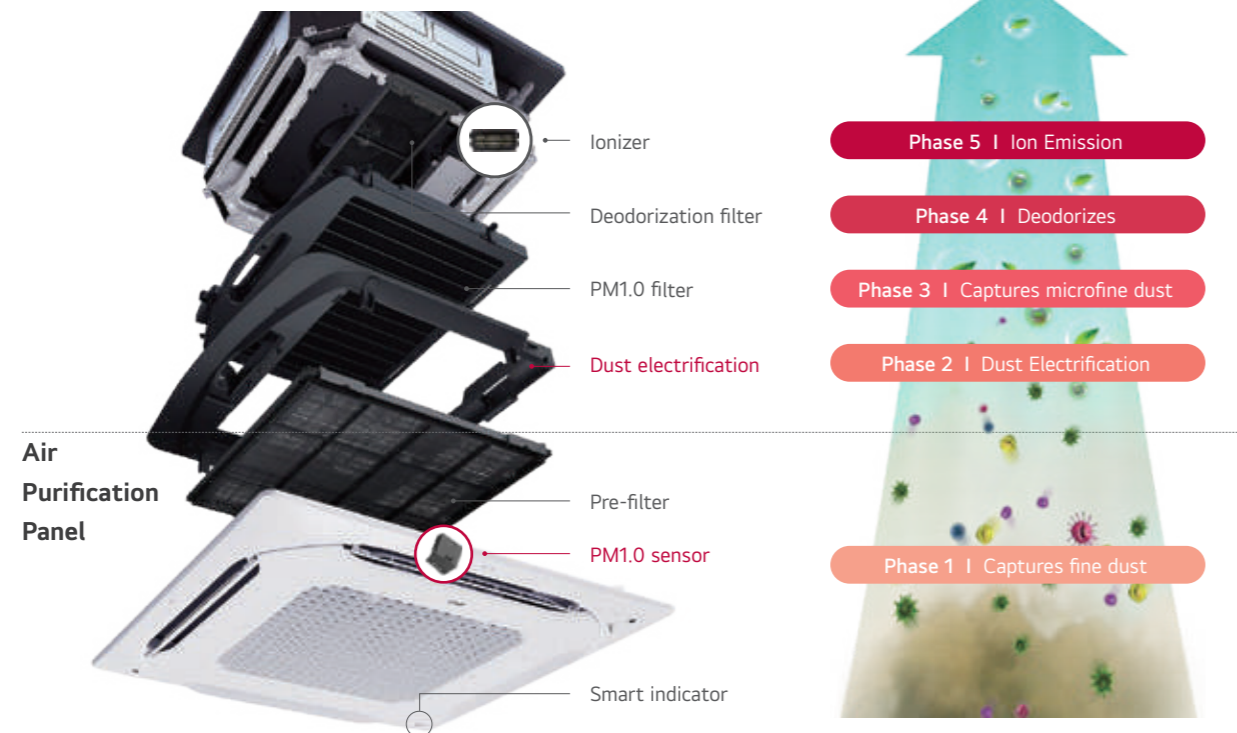

Cycle Management

Pre-filter	PM1.0 Filter	Deodorization Filter
Washable	6 months / Washable	6 months / Dry in sunlight

Air Quality Level Display

Easy accessibility for real-time indoor air quality level.

① IDU LED

Real-time indoor air quality level displayed on indoor unit

■ Good ■ Moderate
■ Unhealthy ■ Poor

② Remote controller

Air quality level displayed on remote controller

③ Mobile

Anytime, anywhere access to check & control air status via mobile


Direct Wind

Wind can reach up to 5 m with plenty air volume. (@ 0.5 ms)



ThinQ Connectivity

Grille automatically detaches and re-attaches with 4 touch points for enhanced stability & convenient filter management.

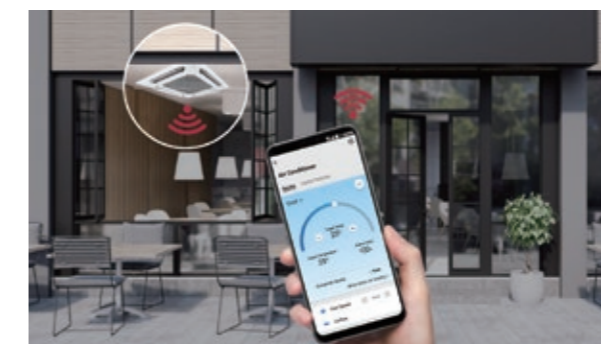



- Monitoring air status : Easy to check indoor air status
 - Ultra Fine / Extra Fine / Fine Dust
 - Day / Week / Month / Yearly
- Mobile remote control : Remote control by using mobile phone
 - Control Mode / Temperature / Air flow etc.
- Display power consumption : Check power consumption of A/C
 - Check energy display
 - Set target energy consumption level

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


Easy Filter Cleaning for Air Purification

Air purification kit filters do not need replacement and can be used semi-permanently. Also, thanks to easy maintenance, users can use air purification conveniently without any worries about filter's cleanliness.

Air Purification Kit

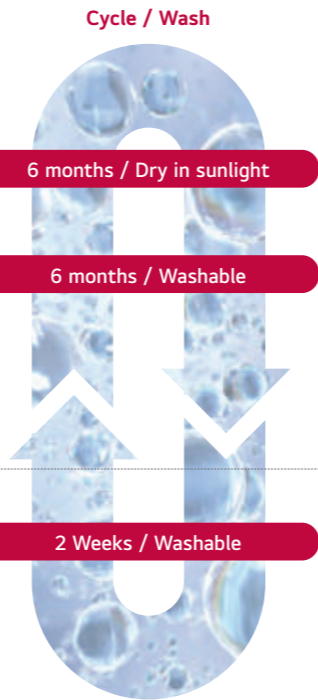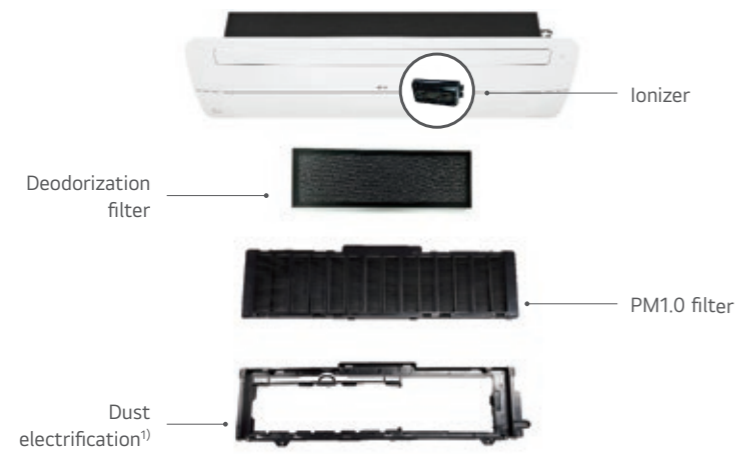

Air Purification Panel

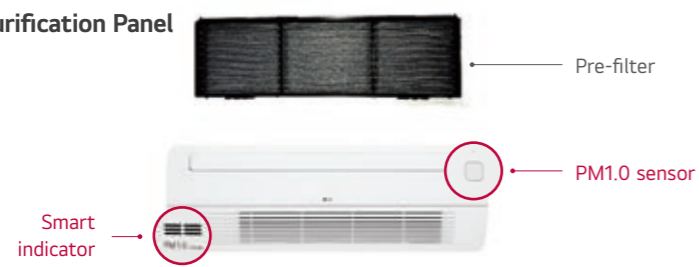

1) It increases the electrostatic force of particle to improve collection efficiency
 ※ Normally HEPA filter type must be replaced regularly. It means that it costs expensive for maintenance.

Direct & Indirect Wind

Provides users with direct or indirect air flow preferences.

Without touching the skin directly, a large space is comfortable!




Cooler on a hot day.



Minimized Height (1 Way)

With a height of 132 mm, the LG 1 Way cassette is the ideal solution for limited-space installations.

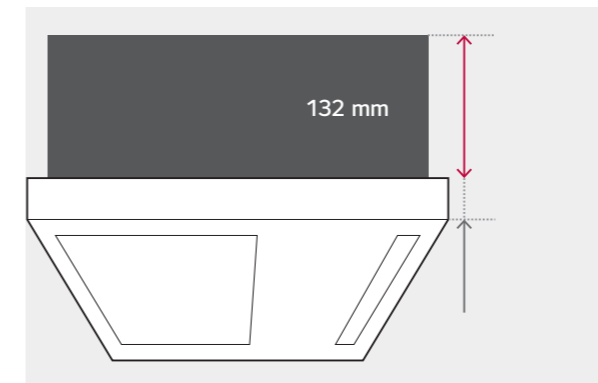

Size Comparison


	A Company	B Company	LG
1 Way Cassette	215	230	132

(Unit : mm)


Flexible Installation (1 Way)

1 Way cassette doesn't require the inspection access hole, so that simple installation is possible.


1 Way Cassette

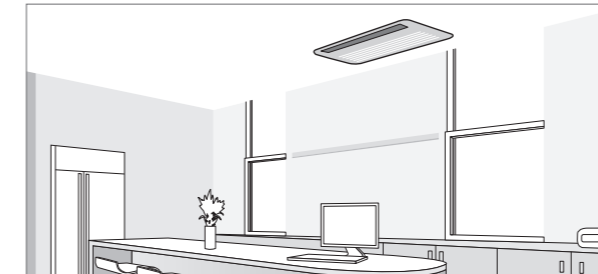

Duct

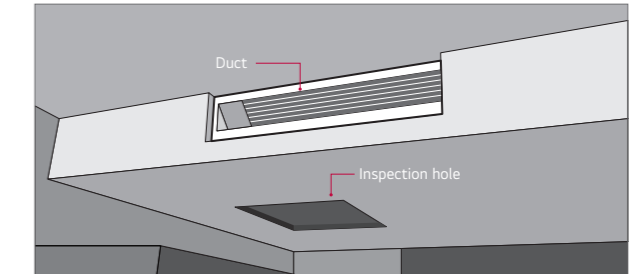



Installation Standard (1 Way)

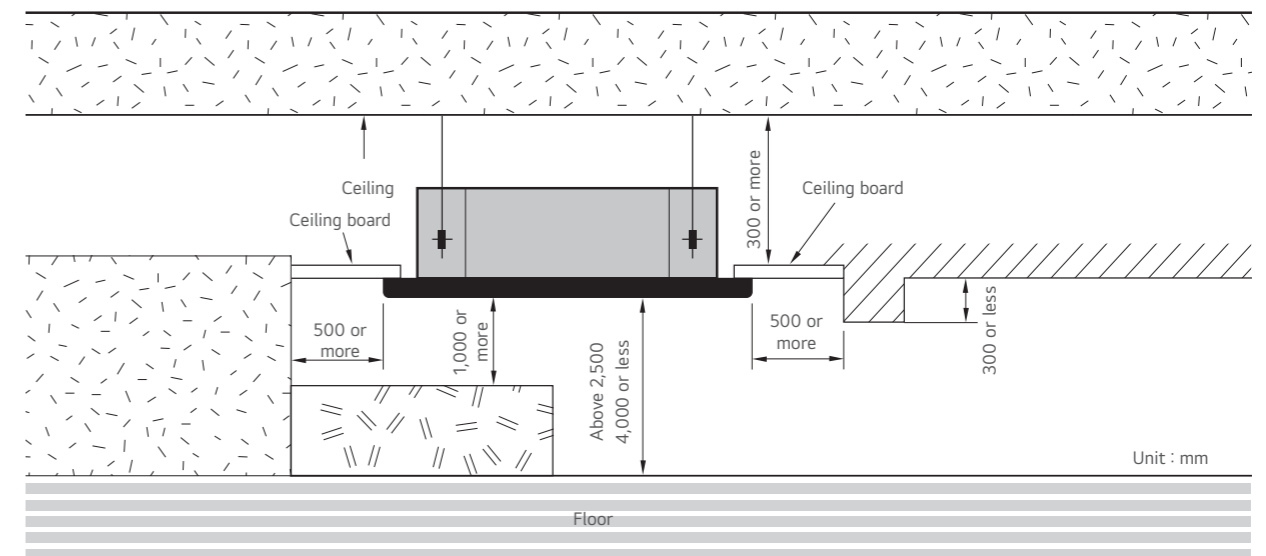

Safe Plus Insulation

Why LG Safe Plus Insulation?

Safe Plus Insulation is an antimicrobial treatment that applied to LG MULTI V Indoor unit internal insulation components, aid in reduced bacterial growth, and provides cleaner and fresher airflow to customer.

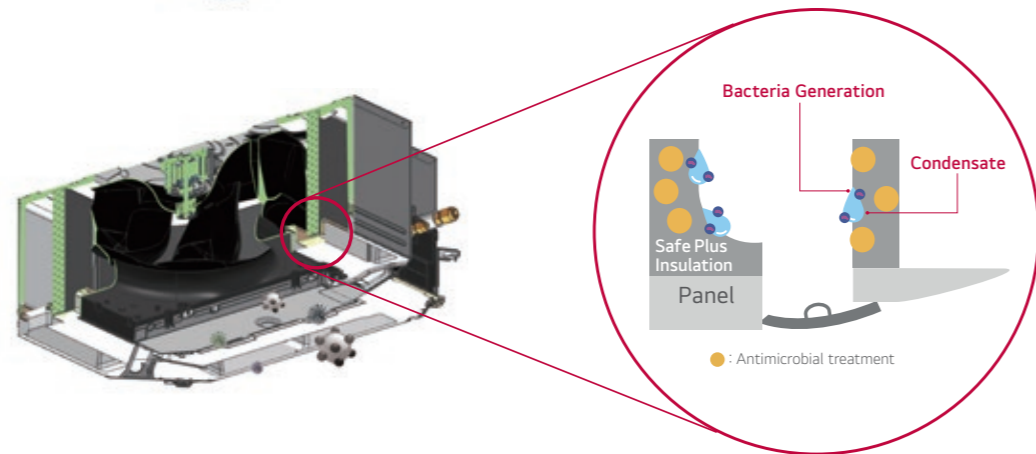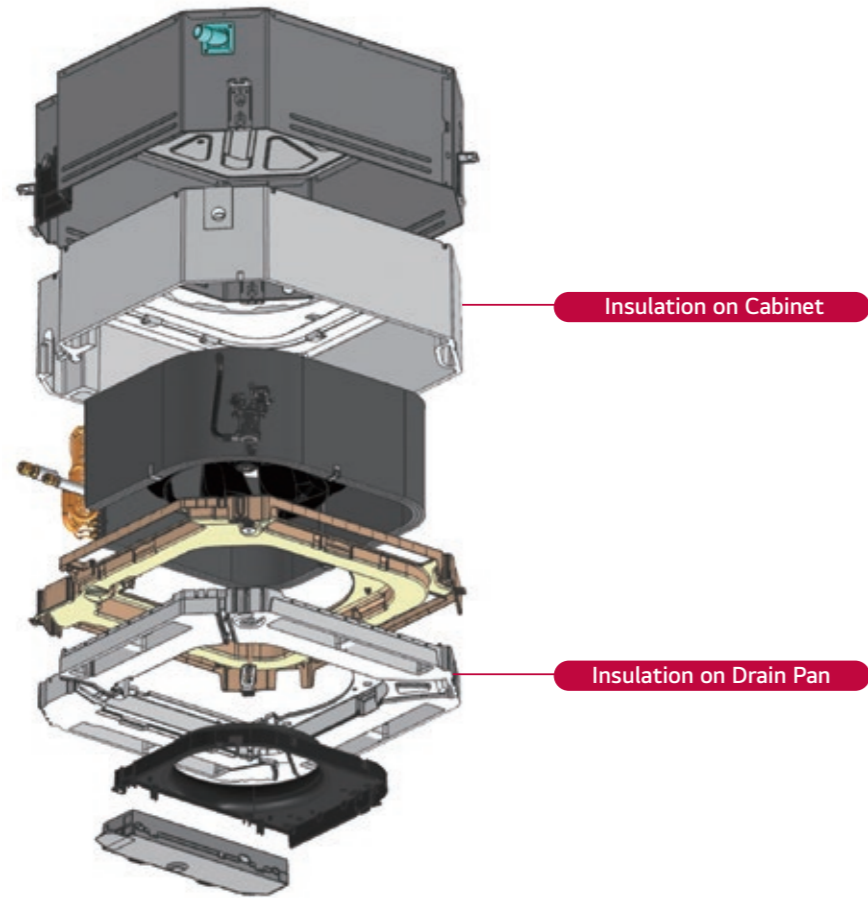

The Hygiene In the Air Conditioner.




Example of EPS Pollution case.

Antimicrobial treatment on *EPS (Cabinet, Drain Pan, Air Guide, Insulator, Supporter) found in LG Air Conditioners is an advance technology that LG has.

	<p>ENVIRONMENTAL CLAIM VALIDATION SUMMARY</p> <p>LG Electronics, Inc.</p> <p>EPS Insulator for Air conditioner (Model: AR90-1000, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R)</p>		<p>ENVIRONMENTAL CLAIM VALIDATION SUMMARY</p> <p>LG Electronics, Inc.</p> <p>EPS Cabinet for Air conditioner (Model: AR90-1000, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R)</p>		<p>ENVIRONMENTAL CLAIM VALIDATION SUMMARY</p> <p>LG Electronics, Inc.</p> <p>EPS Drain Pan for Air conditioner (Model: AR90-1000, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R)</p>
EPS Insulator		EPS Cabinet		EPS Drain Pan	
	<p>ENVIRONMENTAL CLAIM VALIDATION SUMMARY</p> <p>LG Electronics, Inc.</p> <p>EPS Air Guide for Air conditioner (Model: AR90-1000, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R)</p>		<p>ENVIRONMENTAL CLAIM VALIDATION SUMMARY</p> <p>LG Electronics, Inc.</p> <p>EPS Supporter for Air conditioner (Model: AR90-1000, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R, AR90-1000S, AR90-1000L, AR90-1000R)</p>		
EPS Air Guide		EPS Supporter			

EPS for Resistant to Bacterial Growth

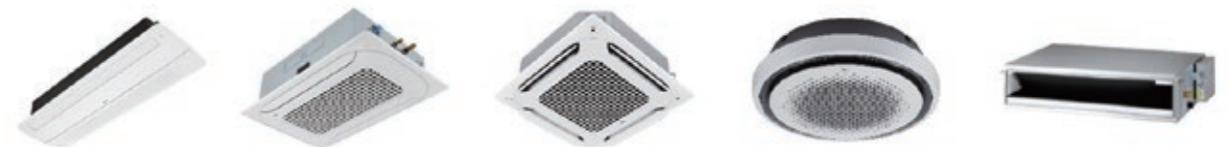

ARNU24GTBB4 / ARNU28GTBB4
ARNU30GTBB4



MODEL		UNIT	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Cooling Capacity		kW	7.1	8.2	9.0
Heating Capacity		kW	8.0	9.2	10.0
Power Input (H / M / L)	Nominal	W	32 / 27 / 20	37 / 30 / 22	48 / 36 / 25
	Body	mm	840 x 204 x 840	840 x 204 x 840	840 x 204 x 840
Dimensions (W x H x D)	Shipping	mm	922 x 276 x 917	922 x 276 x 917	922 x 276 x 917
	Type		Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
Fan	Motor Output x Number	W	51 x 1	51 x 1	51 x 1
	Air Flow Rate (H / M / L)	m³/min	18 / 17 / 15	19 / 17 / 15	21 / 19 / 16
	Motor Type		BLDC	BLDC	BLDC
	Air Filter		Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)
Weight	Body	kg	21	21	21
Sound Pressure Level (H / M / L)		dB (A)	39 / 37 / 35	40 / 38 / 35	43 / 40 / 36
Sound Power Level (H / M / L)		dB (A)	46 / 44 / 42	50 / 46 / 43	53 / 50 / 45
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2
Decoration Panel (Accessory)	Model Name		PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color		White	White	White
	RAL Code		RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU24GTBB4	ARNU28GTBB4	ARNU30GTBB4
Drain Pump		○	
Cassette Cover		PTDCA	
Refrigerant Leakage Detector		PRLDNV50 (R410a)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	
Human Detection Sensor		PTVSA00	
Floor Temperature Sensor		PTFSMA0	
Air Purification Kit		PTAHMPO (PT-AFGW0 panel required)	
Elevation Grille		-	

ARNU36GTAB4 / ARNU42GTAB4
ARNU48GTAB4



MODEL		UNIT	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Cooling Capacity		kW	10.6	12.3	14.1
Heating Capacity		kW	11.9	13.8	15.9
Power Input (H / M / L)	Nominal	W	69 / 49 / 37	97 / 69 / 49	110 / 76 / 61
	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
Dimensions (W x H x D)	Shipping	mm	922 x 360 x 917	922 x 360 x 917	922 x 360 x 917
	Type		Full 3D Turbo Fan	Full 3D Turbo Fan	Full 3D Turbo Fan
Fan	Motor Output x Number	W	135 x 1	135 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	29 / 26 / 22	33 / 29 / 26	34 / 30 / 28
	Motor Type		BLDC	BLDC	BLDC
	Air Filter		Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)
Weight	Body	kg	27	27	27
Sound Pressure Level (H / M / L)		dB (A)	43 / 40 / 37	47 / 43 / 40	48 / 44 / 42
Sound Power Level (H / M / L)		dB (A)	54 / 51 / 47	56 / 53 / 49	58 / 54 / 53
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable (VCTF-SB)		mm² x cores	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2	1.0 ~ 1.5 x 2
Decoration Panel (Accessory)	Model Name		PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0	PT-AAGW0 PT-AFGW0
	Exterior Color		White	White	White
	RAL Code		RAL 9003	RAL 9003	RAL 9003
	Net Dimensions (W x H x D)	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
	Net Weight	kg	7.1 / 7.5	7.1 / 7.5	7.1 / 7.5

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU36GTAB4	ARNU42GTAB4	ARNU48GTAB4
Drain Pump		○	
Cassette Cover		PTDCA	
Refrigerant Leakage Detector		PRLDNV50 (R410a)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	
Human Detection Sensor		PTVSA00	
Floor Temperature Sensor		PTFSMA0	
Air Purification Kit		PTAHMPO (PT-AFGW0 panel required)	
Elevation Grille		-	

ARNU24GTPA4 / ARNU28GTPA4
ARNU30GTPA4 / ARNU36GTNA4



MODEL		UNIT	ARNU24GTPA4	ARNU28GTPA4	ARNU30GTPA4	ARNU36GTNA4
Cooling Capacity		kW	7.1	8.2	9.0	10.6
Heating Capacity		kW	8.0	9.2	10.0	11.9
Power Input (H / M / L)	Nominal	W	18 / 16 / 14	20 / 17 / 15	26 / 24 / 21	70 / 53 / 43
Dimensions (W x H x D)	Body	mm	840 x 204 x 840	840 x 204 x 840	840 x 204 x 840	840 x 246 x 840
	Shipping	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
Fan	Type		Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	30 x 1	30 x 1	30 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	17.0 / 15.0 / 13.0	19.0 / 16.0 / 14.0	24.3 / 22.8 / 19.5	25 / 21 / 19
	Motor Type		BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)	25 (1)
Weight	Body	kg	20.8 (45.8)	20.8 (45.8)	20.8 (45.8)	23.5 (51.8)
Sound Pressure Levels (H / M / L)		dB (A)	36 / 34 / 31	39 / 35 / 33	40 / 36 / 33	43 / 40 / 37
Sound Power Levels (H / M / L)		dB (A)	46 / 44 / 43	52 / 46 / 44	58 / 57 / 54	56 / 53 / 51
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Decoration Panel (Accessory)	Model Name		PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0
	Exterior Color		Morning Fog	Morning Fog	Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950
	Net Weight	kg	5.0 / 6.3	5.0 / 6.3	5.0 / 6.3	5.0 / 6.3

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU24GTPA4	ARNU28GTPA4	ARNU30GTPA4	ARNU36GTNA4
Drain Pump			○	
Cassette Cover			PTDCM	
Refrigerant Leakage Detector			PRLDNVSO	
EEV Kit			-	
Independent Power Module			PRIP0	
Robot Cleaner			-	
Pre Filter (Washable)			○	
Ion Generator			-	
CO ₂ Sensor			-	
Ventilation Kit			PTVK430	
IR Receiver			-	
Zone Controller			-	
Dry Contact (with Additional Accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)			○	
Wi-Fi			PWFMD200	
Air Purification Kit			PT-MPGW0 : PTAHMP0	
Human Detection Sensor			PTVAAA0	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU42GTMA4 / ARNU48GTMA4
ARNU54GTMA4



MODEL		UNIT	ARNU42GTMA4	ARNU48GTMA4	ARNU54GTMA4
Cooling Capacity		kW	12.3	14.1	15.8
Heating Capacity		kW	13.8	15.9	18.0
Power Input (H / M / L)	Nominal	W	86 / 78 / 69	89 / 84 / 78	98 / 92 / 78
Dimensions (W x H x D)	Body	mm	840 x 288 x 840	840 x 288 x 840	840 x 288 x 840
	Shipping	mm	950 x 35 x 950	950 x 35 x 950	950 x 35 x 950
Fan	Type		Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No.	135 x 1	135 x 1	135 x 1
	Air Flow Rate (H / M / L)	m³/min	30 / 27 / 24	31 / 29 / 27	34 / 32 / 27
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	25 (1)
Weight	Body	kg	25.6 (56.4)	25.6 (56.4)	26.5 (58.4)
Sound Pressure Levels (H / M / L)		dB (A)	44 / 41 / 38	46 / 43 / 41	50 / 48 / 44
Sound Power Levels (H / M / L)		dB (A)	58 / 55 / 50	60 / 56 / 55	60 / 58 / 55
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable		mm² x No.	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Decoration Panel (Accessory)	Model Name		PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0	PT-MCGW0 PT-MPGW0
	Exterior Color		Morning Fog	Morning Fog	Morning Fog
	RAL Code		RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950	950 x 25 x 950 950 x 35 x 950
	Net Weight	kg	5.0 / 6.3	5.0 / 6.3	5.0 / 6.3

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU42GTMA4	ARNU48GTMA4	ARNU54GTMA4
Drain Pump			○
Cassette Cover			PTDCM
Refrigerant Leakage Detector			PRLDNVSO
EEV Kit			-
Independent Power Module			PRIP0
Robot Cleaner			-
Pre Filter (Washable)			○
Ion Generator			-
CO ₂ Sensor			-
Ventilation Kit			PTVK430
IR Receiver			-
Zone Controller			-
Dry Contact (with Additional Accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)			○
Wi-Fi			PWFMD200
Air Purification Kit			PT-MPGW0 : PTAHMP0
Human Detection Sensor			PTVAAA0

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU05GTRB4 / ARNU07GTRB4
ARNU09GTRB4 / ARNU12GTRB4



MODEL	UNIT	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Cooling Capacity	kW	1.6	2.2	2.8	3.6
Heating Capacity	kW	1.8	2.5	3.2	4.0
Power Input (H / M / L)	Nominal W	13 / 12 / 11	13 / 12 / 11	14 / 13 / 12	17 / 15 / 13
Dimensions (W x H x D)	Body mm	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570	570 x 214 x 570
	Shipping mm	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646	667 x 285 x 646
Fan	Type	Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W 43 x 1	43 x 1	43 x 1	43 x 1
	Air Flow Rate (H / M / L)	m ³ /min 7.5 / 7.0 / 6.6	7.5 / 7.0 / 6.6	8.0 / 7.5 / 7.1	8.7 / 8.0 / 7.0
	Motor Type	BLDC	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter
	Liquid Side	mm (inch) Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side	mm (inch) Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
Pipe Connections	Drain Pipe (Internal Dia.)	mm (inch) Ø 25 (1)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)
Weight	Body kg	12.6	12.6	13.7	13.7
Sound Pressure Levels (H / M / L)	dB (A)	29 / 27 / 26	29 / 27 / 26	30 / 29 / 27	32 / 30 / 27
Sound Power Levels (H / M / L)	dB (A)	47 / 46 / 45	47 / 46 / 45	48 / 46 / 45	51 / 48 / 45
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable	mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Decoration Panel (Accessory)	Model Name	PT-QAGW0	PT-QAGW0	PT-QAGW0	PT-QAGW0
	Exterior Color	White	White	White	White
	RAL Code	RAL 9001	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm 620 x 35 x 620	620 x 35 x 620	620 x 35 x 620	620 x 35 x 620
	Net Weight	kg 3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9

Note :
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
5. Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU05GTRB4	ARNU07GTRB4	ARNU09GTRB4	ARNU12GTRB4
Drain Pump		○		
Cassette Cover		-		
Refrigerant Leakage Detector		PRLDNV50 (R410a)		
EEV Kit		PRGK024A0 (-4.5 kW)		
Multi-tenant Power Module		PINPMB001		
Robot Cleaner		-		
Pre Filter (Washable)		○		
Ion Generator		-		
CO ₂ Sensor		-		
Ventilation Kit		PTVK430		
IR Receiver		-		
Zone Controller		-		
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)		○		
Wi-Fi		PWFMD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU15GTQB4 / ARNU18GTQB4
ARNU21GTQB4



MODEL	UNIT	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Cooling Capacity	kW	4.5	5.6	6.0
Heating Capacity	kW	5.0	6.3	6.8
Power Input (H / M / L)	Nominal W	24 / 21 / 18	25 / 22 / 19	28 / 23 / 20
Dimensions (W x H x D)	Body mm	570 x 256 x 570	570 x 256 x 570	570 x 256 x 570
	Shipping mm	667 x 327 x 646	667 x 327 x 646	667 x 327 x 646
Fan	Type	Turbo Fan	Turbo Fan	Turbo Fan
	Motor Output x Number	W 43 x 1	43 x 1	43 x 1
	Air Flow Rate (H / M / L)	m ³ /min 11.0 / 10.0 / 9.3	11.2 / 11.0 / 10.0	12.0 / 11.1 / 9.4
	Motor Type	BLDC	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter	Pre Filter
	Liquid Side	mm (inch) Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 9.52 (3/8)
	Gas Side	mm (inch) Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
Pipe Connections	Drain Pipe (Internal Dia.)	mm (inch) Ø 25 (1)	Ø 25 (1)	Ø 25 (1)
Weight	Body kg	15.0	15.0	15.0
Sound Pressure Levels (H / M / L)	dB (A)	36 / 34 / 32	37 / 35 / 34	40 / 38 / 34
Sound Power Levels (H / M / L)	dB (A)	52 / 50 / 46	52 / 50 / 46	54 / 52 / 46
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable	mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Decoration Panel (Accessory)	Model Name	PT-QAGW0	PT-QAGW0	PT-QAGW0
	Exterior Color	White	White	White
	RAL Code	RAL 9001	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm 620 x 35 x 620	620 x 35 x 620	620 x 35 x 620
	Net Weight	kg 3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9	3.2 / 3.0 / 2.9

Note :
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
5. Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU15GTQB4	ARNU18GTQB4	ARNU21GTQB4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNV50 (R410a)	
EEV Kit		PRGK024A0 (-4.5 kW)	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		PTVK430	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU09GTSC4 / ARNU12GTSC4



MODEL	UNIT	ARNU09GTSC4	ARNU12GTSC4
Cooling Capacity	kW	2.8	3.6
Heating Capacity	kW	3.2	4.0
Power Input (H / M / L)	Nominal W	16 / 14 / 11	18 / 14 / 11
Dimensions (W x H x D)	Body mm	830 x 225 x 600	830 x 225 x 600
	Shipping mm	1,055 x 290 x 682	1,055 x 290 x 682
Fan	Type	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No. 37 x 1	37 x 1
	Air Flow Rate (H / M / L)	m ³ /min 10.8 / 9.8 / 9.1	11.1 / 10.3 / 9.1
	Motor Type	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch) Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side	mm (inch) Ø 12.7 (1/2)	Ø 12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch) Ø 25 (1)	Ø 25 (1)
Weight	Body kg	18.1	18.1
Sound Pressure Levels (H / M / L)	dB (A)	33 / 31 / 29	34 / 32 / 29
Sound Power Levels (H / M / L)	dB (A)	44 / 41 / 40	44 / 42 / 40
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable	mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Decoration Panel (Accessory)	Model Name	PT-USC	PT-USC
	Exterior Color	Morning Fog	Morning Fog
	RAL Code	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm 1,100 x 28 x 690	1,100 x 28 x 690
	Net Weight	kg 4.7	4.7

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU09GTSC4	ARNU12GTSC4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVSO (R410a)
EEV Kit		PRGK024A0 (-5.6 kW)
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GTSC4 / ARNU24GTSC4



MODEL	UNIT	ARNU18GTSC4	ARNU24GTSC4
Cooling Capacity	kW	5.6	7.1
Heating Capacity	kW	6.3	8.0
Power Input (H / M / L)	Nominal W	19 / 16 / 14	31 / 22 / 14
Dimensions (W x H x D)	Body mm	830 x 225 x 600	830 x 225 x 600
	Shipping mm	1,055 x 290 x 682	1,055 x 290 x 682
Fan	Type	Turbo Fan	Turbo Fan
	Motor Output x Number	W x No. 37 x 1	37 x 1
	Air Flow Rate (H / M / L)	m ³ /min 11.8 / 10.8 / 9.8	14.5 / 12.4 / 10.3
	Motor Type	BLDC	BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch) Ø 6.35 (1/4)	Ø 9.52 (3/8)
	Gas Side	mm (inch) Ø 12.7 (1/2)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch) Ø 25 (1)	Ø 25 (1)
Weight	Body kg	18.1	18.1
Sound Pressure Levels (H / M / L)	dB (A)	35 / 33 / 31	40 / 37 / 33
Sound Power Levels (H / M / L)	dB (A)	45 / 44 / 41	51 / 48 / 42
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable	mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C
Decoration Panel (Accessory)	Model Name	PT-USC	PT-USC
	Exterior Color	Morning Fog	Morning Fog
	RAL Code	RAL 9001	RAL 9001
	Net Dimensions (W x H x D)	mm 1,100 x 28 x 690	1,100 x 28 x 690
	Net Weight	kg 4.7	4.7

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU18GTSC4	ARNU24GTSC4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVSO (R410a)
EEV Kit		PRGK024A0 (-5.6 kW)
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU07GTUB4 / ARNU09GTUB4
ARNU12GTUB4

MODEL	UNIT	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4	
Cooling Capacity	kW	2.2	2.8	3.6	
Heating Capacity	kW	2.5	3.2	4.0	
Power Input (H / M / L)	Nominal	20 / 18 / 16	22 / 20 / 18	24 / 22 / 20	
	W				
Dimensions (W x H x D)	Body	860 x 132 x 450	860 x 132 x 450	860 x 132 x 450	
	Shipping	1,129 x 259 x 538	1,129 x 259 x 538	1,129 x 259 x 538	
Fan	Type	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	
	Motor Output x Number	W x No.	30 x 1	30 x 1	
	Air Flow Rate (H / M / L)	m ³ /min	8.2 / 7.3 / 6.4	9.2 / 8.6 / 8.2	
	Motor Type		BLDC	BLDC	
Air Filter		Pre Filter	Pre Filter	Pre Filter	
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	
Weight	Body	kg	12.2	12.2	
Sound Pressure Levels (H / M / L)		dB (A)	32 / 29 / 25	35 / 34 / 32	
Sound Power Levels (H / M / L)		dB (A)	47 / 44 / 41	51 / 49 / 47	
Power Supply	Ø / V / Hz		1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	
Transmission Cable	mm ²		1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	
Decoration Panel (Accessory)	Model Name		PT-UAHGO, PT-UAHW0, PT-UPHGO	PT-UAHGO, PT-UAHW0, PT-UPHGO	
	Exterior Color		Noble White	Noble White	
	RAL Code		RAL 9003	RAL 9003	
	Net Dimensions (W x H x D)	mm		1,160 x 34 x 500	1,160 x 34 x 500
				1,100 x 34 x 500	1,100 x 34 x 500
	Net Weight	kg		3.9 / 3.3 / 4.1	3.9 / 3.3 / 4.1

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU07GTUB4	ARNU09GTUB4	ARNU12GTUB4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVSO (R410a)	
EEV Kit		PRGK024A0	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Air Purification Kit		PTAHTPO	
Wi-Fi		PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU18GTTB4 / ARNU24GTTB4



MODEL	UNIT	ARNU18GTTB4	ARNU24GTTB4	
Cooling Capacity	kW	5.6	7.1	
Heating Capacity	kW	6.3	7.1	
Power Input (H / M / L)	Nominal	38 / 28 / 24	51 / 33 / 26	
	W			
Dimensions (W x H x D)	Body	1,180 x 132 x 450	1,180 x 132 x 450	
	Shipping	1,499 x 259 x 538	1,499 x 259 x 538	
Fan	Type	Cross Flow Fan	Cross Flow Fan	
	Motor Output x Number	W x No.	30 x 1	
	Air Flow Rate (H / M / L)	m ³ /min	13.3 / 12.1 / 10.9	
	Motor Type		BLDC	
Air Filter		Pre Filter	Pre Filter	
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	
	Gas Side	mm (inch)	Ø 12.7 (1/2)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	
Weight	Body	kg	15.3	
Sound Pressure Levels (H / M / L)		dB (A)	40 / 37 / 35	
Sound Power Levels (H / M / L)		dB (A)	55 / 51 / 47	
Power Supply	Ø / V / Hz		1, 220 ~ 230 ~ 240, 50 / 60	
Transmission Cable	mm ²		1.0 ~ 1.5 x 2 C	
Decoration Panel (Accessory)	Model Name		PT-TAHGO, PT-TAHWO, PT-TPHGO	
	Exterior Color		Noble White	
	RAL Code		RAL 9003	
	Net Dimensions (W x H x D)	mm		1,480 x 34 x 500
				1,420 x 34 x 500
	Net Weight	kg		4.8 / 4.5 / 4.9

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU18GTTB4	ARNU24GTTB4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVSO (R410a)
EEV Kit		-
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Air Purification Kit		PTAHTPO
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



Features & Benefits

- Round cassette design makes the space look luxurious
- Perfect round air flow without blind spots.

Key Applications

- Retail
- Office
- Restaurant
- Hotel

	CASSETTE	ROUND
Smart	Wi-Fi	○
Energy Efficiency	Human Detect Sensor	-
	Drain Pump	○
Comfort	Sleep Mode	○
	Timer (On / Off)	○
	Timer (Weekly)	○
	Two Thermistor Control	○
	Group Control	○

※ ○: Applied, - : Not applied


Slim and Compact Design

Save space and maximize the openness of the interior space.




Minimal Exposure Design

Hanger covers hide installations to add a clean look.

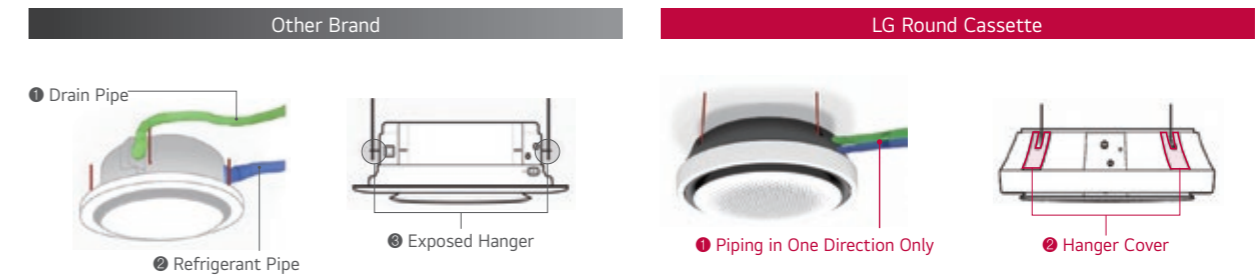


Perfect Round Air Flow

Perfect round flow without blind spots.

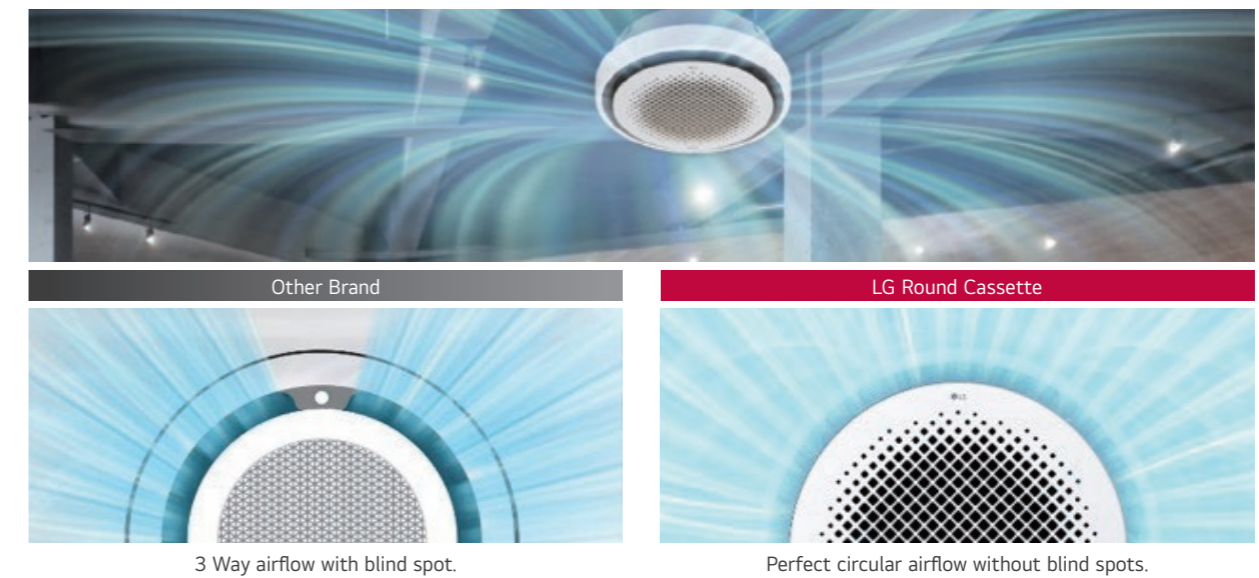

Visible Air Flow


With crystal vein for 6-step precision control, you can send cool / heated air wherever you want.

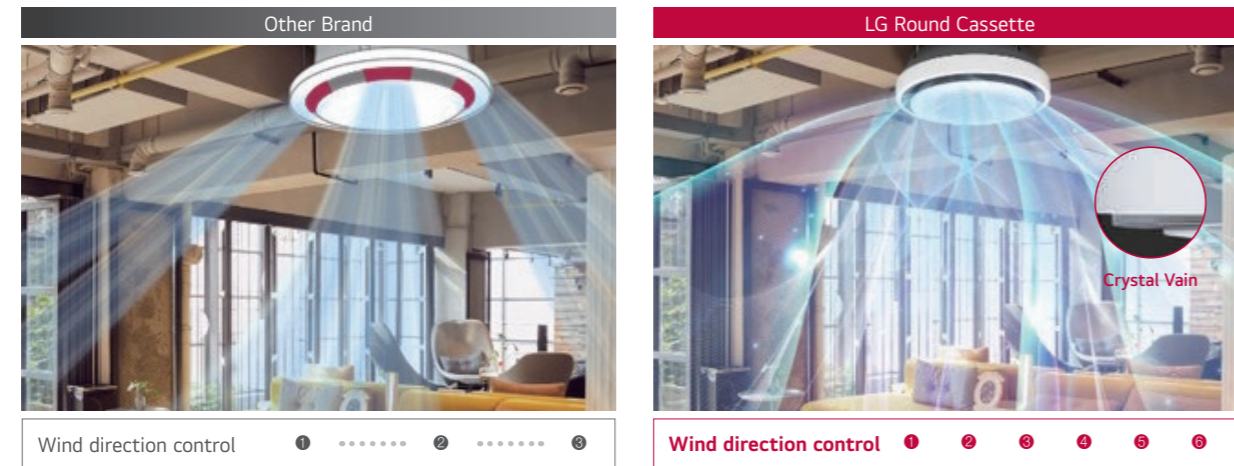

Powerful and Quiet Air Flow


3D fan increases airflow by 5% and noise reduction technology makes a quieter, more comfortable space.

Full 3D Fan, Air Flow Rate 5% ↑

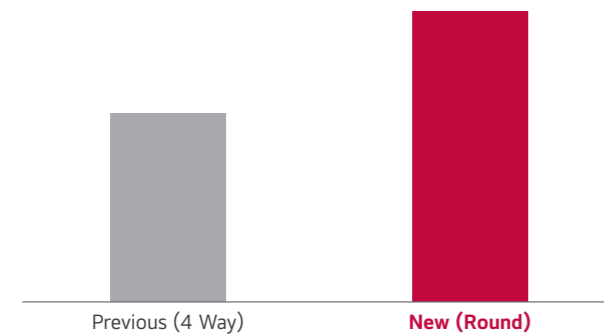


Full 3D Fan, Low Noise

※ 48 kBtu, Low flow rate

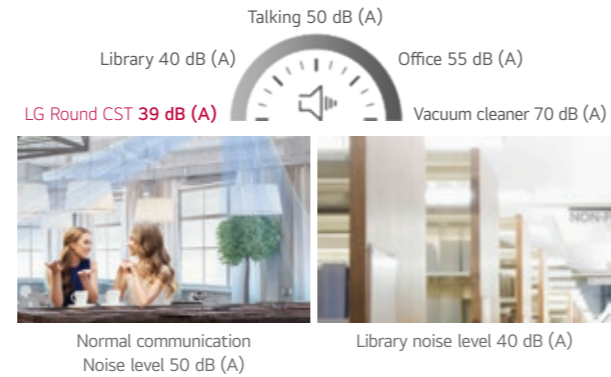

Faster in Cooling

Larger airflow rate, faster cooling time.

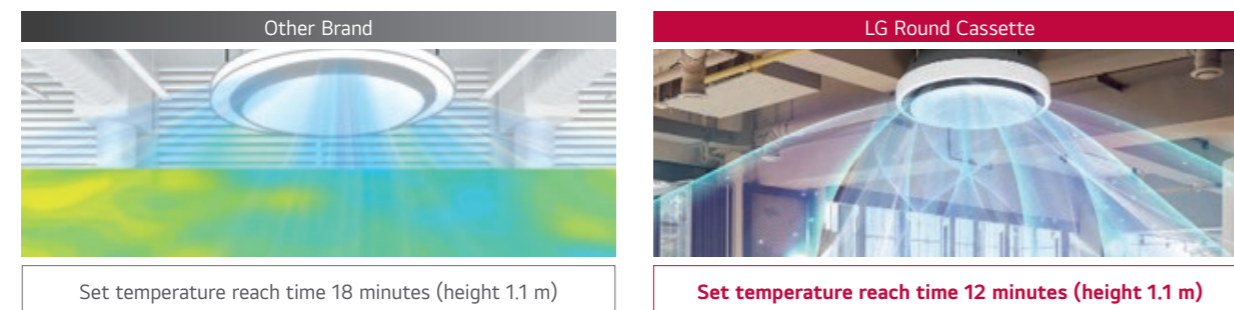

※ Based on test results from LG chamber, this image is designed to help customers understand. Experimental environment: height 3.2m, 48 kBtu, cooling mode, high flow rate, horizontal air flow direction

ARNU24GTYA4 / ARNU36GTYA4 / ARNU48GTYA4



MODEL		UNIT	ARNU24GTYA4	ARNU36GTYA4	ARNU48GTYA4
Cooling Capacity		kW	7.1	10.6	14.1
Heating Capacity		kW	8.0	11.9	15.9
Power Input (H / M / L)	Nominal	W	44 / 36 / 29	63 / 47 / 36	98 / 70 / 44
Dimensions (W x H x D)	Body	mm	1,050 x 330 x 1,050	1,050 x 330 x 1,050	1,050 x 330 x 1,050
	Shipping	mm	1,137 x 395 x 1,132	1,137 x 395 x 1,132	1,137 x 395 x 1,132
Fan	Type		3D Turbo Fan	3D Turbo Fan	3D Turbo Fan
	Motor Output x Number	W	157 x 1	157 x 1	157 x 1
	Air Flow Rate (H / M / L)	m3/min	22 / 21 / 19	27 / 24 / 21	32 / 28 / 23
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Long life	Long life	Long life
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)
Weight	Body	kg	30	30	30
Sound Pressure Level (H / M / L)		dB (A)	39 / 37 / 34	43 / 39 / 37	47 / 44 / 39
Sound Power Level (H / M / L)		dB (A)	48 / 46 / 43	52 / 48 / 46	56 / 53 / 48
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable (VCTF-SB)		mm ² x cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU24GTYA4	ARNU36GTYA4	ARNU48GTYA4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVS0 (R410a)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		-	
Zone Controller		-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMDD200	
Human Detection Sensor		-	
Floor Temperature Sensor		-	
Air Purification Kit		PTAHYPO	
Elevation Grille		-	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



Features & Benefits

- Aircon duct air volume can be adjusted with External Static Pressure (ESP) control function.
- Minimalist visibility (Hidden within ceiling) to blend seamlessly into any interior

Key Applications

- Office
- Retail
- Hotel
- Residential building

	DUCT	HIGH STATIC	MIDDLE STATIC	LOW STATIC
Smart	Wi-Fi	○	○	○
Energy Efficiency	E.S.P Control	○	○	○
	Drain Pump	○	○	○
	Timer (On / Off)	○	○	○
Comfort	Timer (Weekly)	○	○	○
	Two Thermistor Control	○	○	○
	Group Control	○	○	○


※ ○: Applied, - : Not applied

Wi-Fi Control

Anytime, anywhere access to the unit with Android & iOS-based smartphones.

ThinQ

Search "ThinQ" on Google Store or the App Store to download the app.

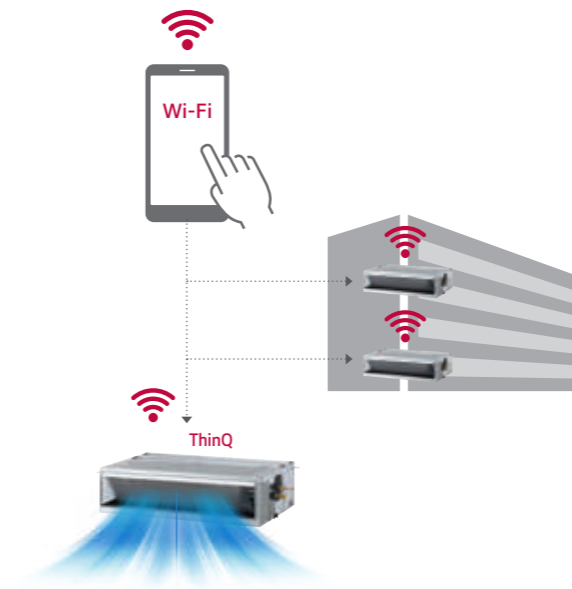

Easy Registration and Log-in

Follow the easy set-up steps that will activate ThinQ's user-friendly features.



Simple operation for various functions



On / Off, Current Temp



Mode, Set Temp





Zone Control

※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.


External Static Pressure (ESP) Control

User has easy access to air volume selection via remote controller using the ESP control function. The BLDC motor can control fan speed and air volume. No additional accessories are needed to control air flow.

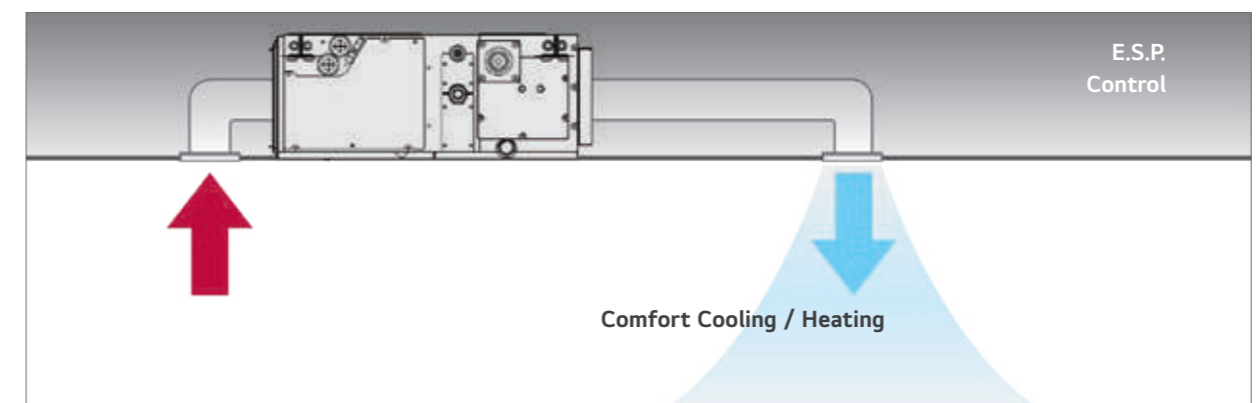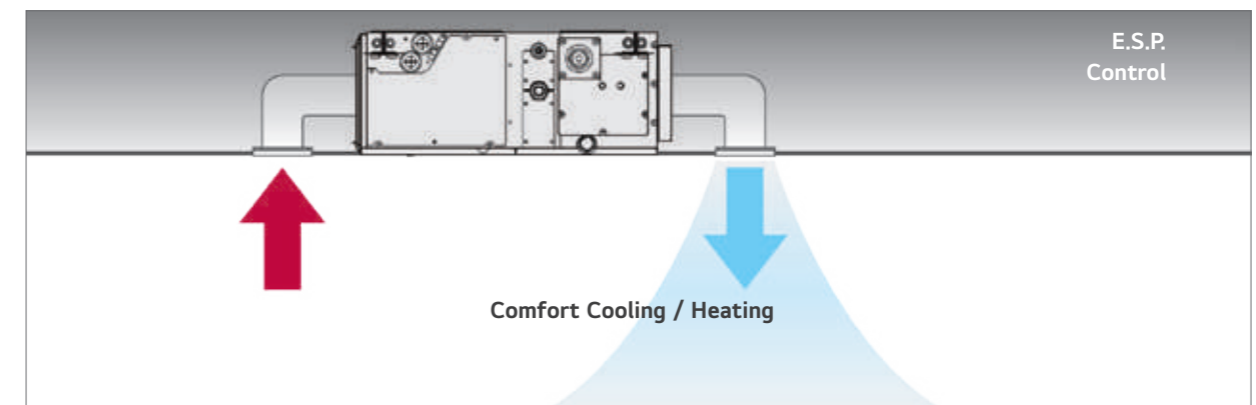

Static Pressure 11- step Control


Depending on the installation environment, LG's ceiling concealed duct controls the static pressure with 11 steps to provide maximized comfort to any environment.

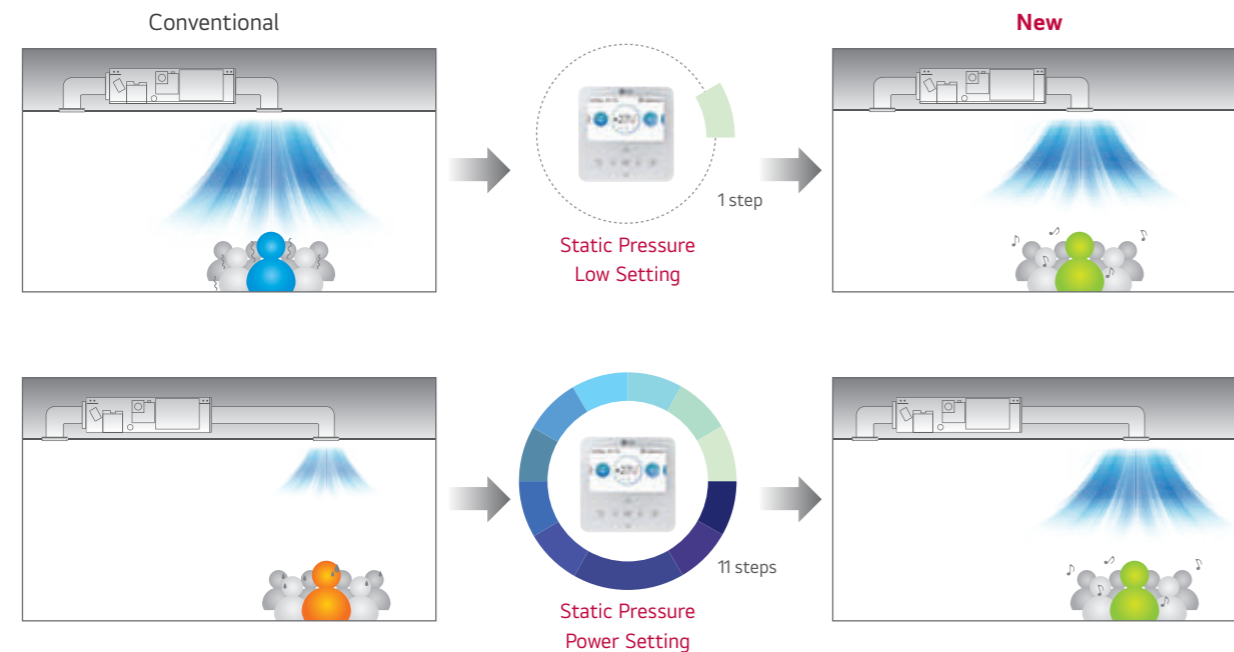

Energy Monitoring

Accumulated electric energy of the indoor unit can be identified with wired remote control, as well as with the central controller. This function is an advantage for energy management.

Install Scene

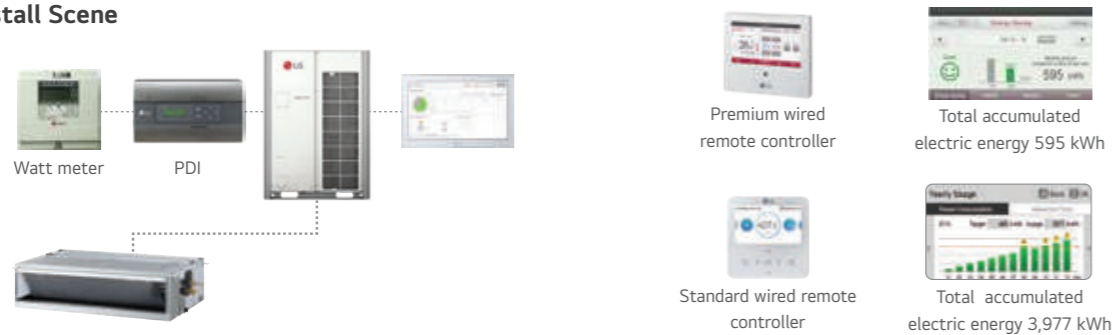

Apply for Multistory Building




※ Outdoor unit's accumulated electric energy / using rate of individual indoor unit + indoor unit's accumulated electric energy is displayed in wired remote controller, only when central controller, digital integrating electricity meter and PDI are installed and PDI, outdoor unit and indoor unit are connected with power wire. Only total accumulated electric energy is displayed in standard wired remote controller. In premium wired remote controller, that are displayed into week / month / year.

Safe Plus Insulation

Why LG Safe Plus Insulation?

Safe Plus Insulation is an antimicrobial treatment that is applied to LG MULTI V Indoor unit internal insulation components to resistance bacterial growth, and provides cleaner and fresher airflow to customer.

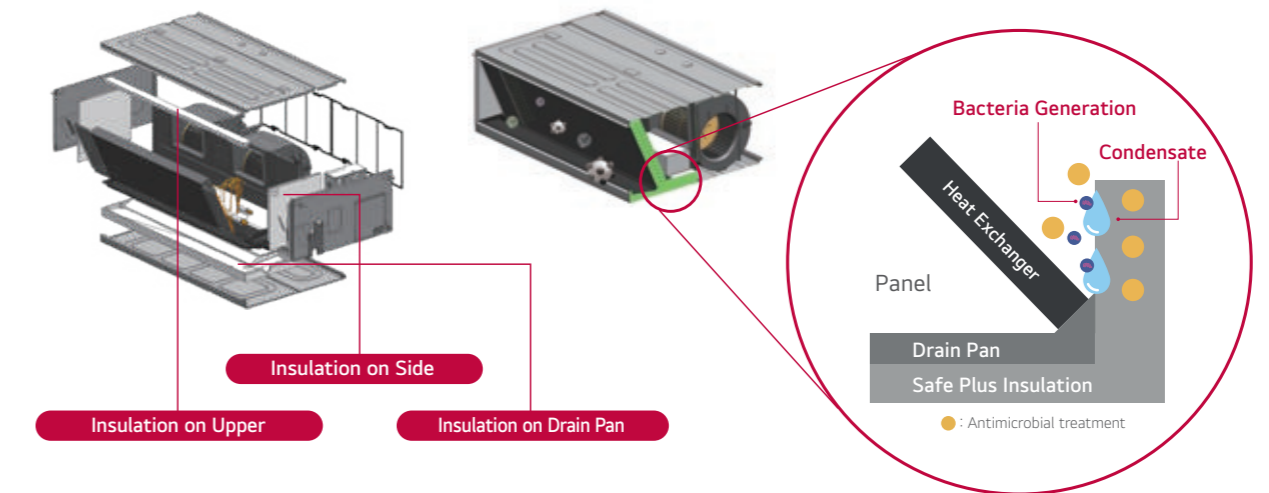


The Hygiene In the Air Conditioner.




Example of EPS Pollution case.

Antimicrobial treatment on *EPS (Cabinet, Drain Pan, Air Guide, Insulator, Supporter) found in LG Air Conditioners is an advance technology that LG has.

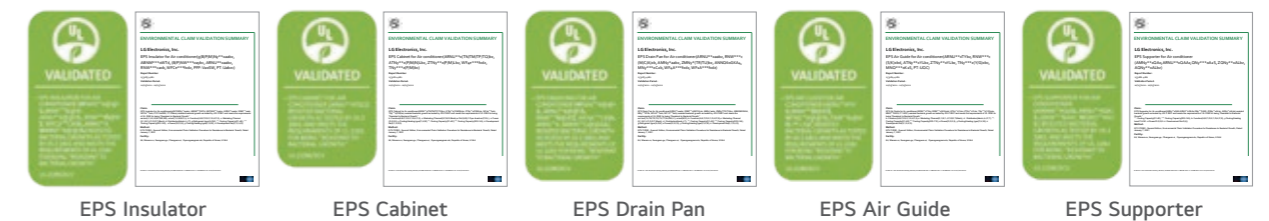

Multiple Room Operation

Using a spiral duct (embedded or flexible type) and stream chamber, it is possible to operate cooling / heating for several rooms simultaneously.

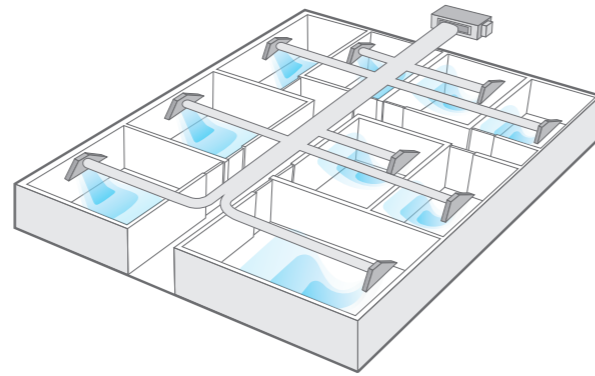


Filter Alert

The alarm is activated when the filter needs to be cleaned.

Cleaning Cycle will be Displayed on the Screen




Remain time until indoor filter cleaning 2,400 hr.



Remain time until indoor filter cleaning 1,729 hr.


Flexible Installation (Low Static Duct Slim Only)

Air Intake at the Rear or Bottom

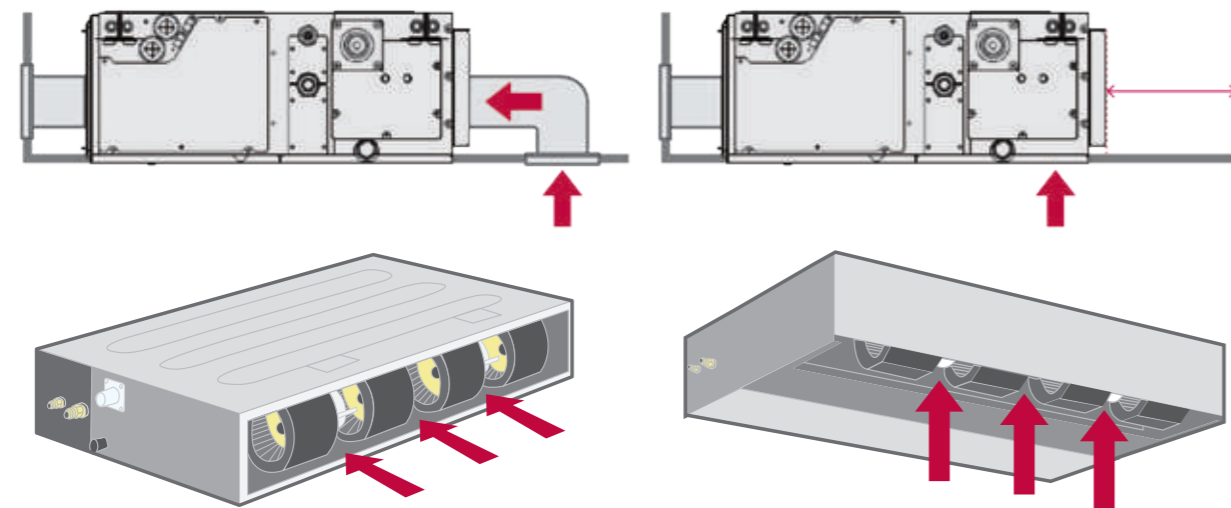


Minimized Height (For Mid Static Duct)

Mid Static Ducts work as ideal solution for installation in limited space.

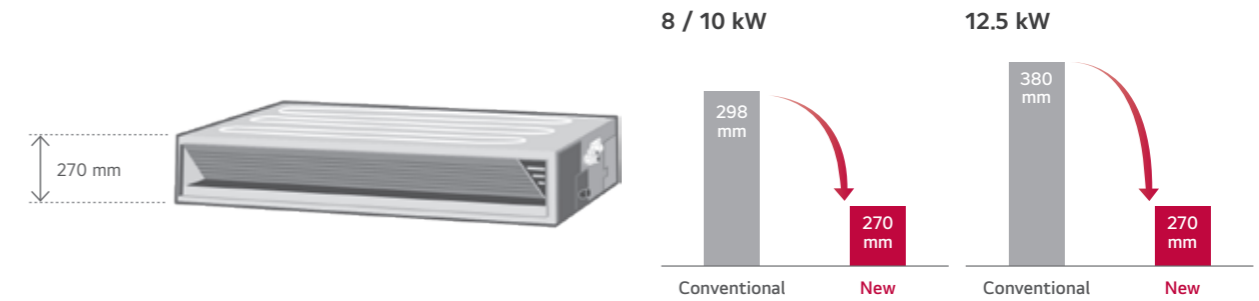

Two Thermistors Control


The indoor temperature can be checked using the thermistors in the remote controller as well as from the indoor unit. There may be a significant difference between ceiling and floor air temperature. Two thermistors can optimise indoor air temperature for a more comfortable environment.

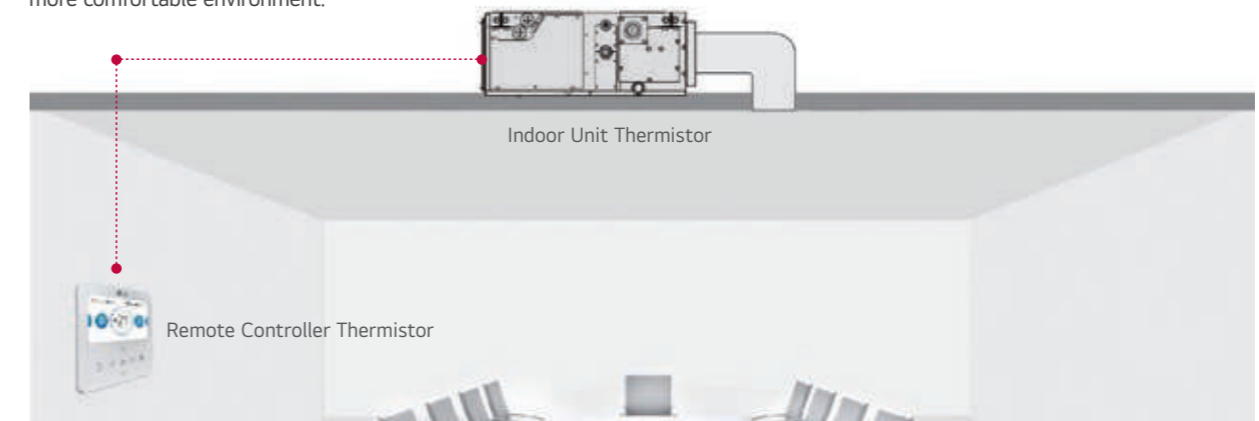

One Point External Input (On / Off Control)


Indoor unit can be controlled by external devices without dry contact, so customer can save cost of installation.

Connection between an Indoor Unit and External Devices Directly

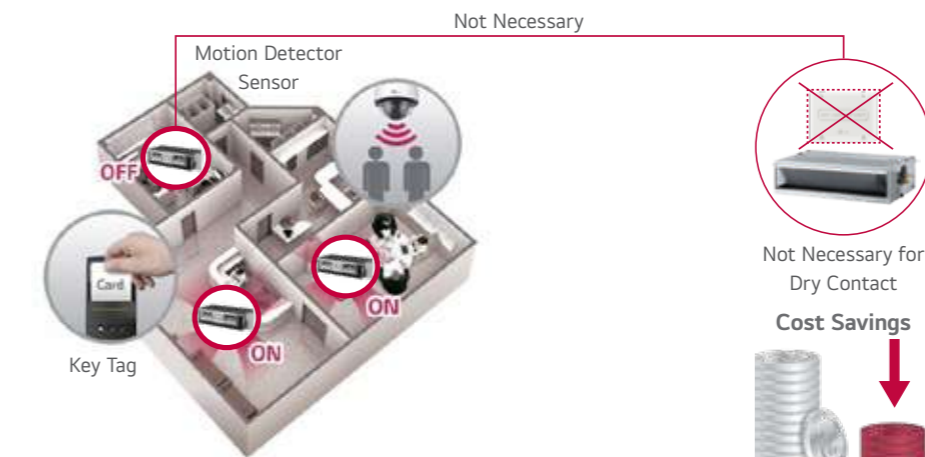

※ In case of needing more functions beside on / off control, a dry contact is required to be installed.

ARNU07GM1A4 / ARNU09GM1A4
ARNU12GM1A4 / ARNU15GM1A4
ARNU18GM1A4 / ARNU24GM1A4

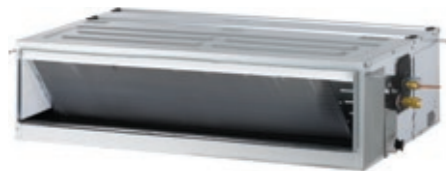

MODEL	UNIT	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4	
Cooling Capacity	kW	2.2	2.8	3.6	4.5	5.6	7.1	
Heating Capacity	kW	2.5	3.2	4.0	5.0	6.3	8.0	
Power Input (H / M / L)	Nominal W	39 / 30 / 25	40 / 32 / 26	46 / 38 / 31	67 / 53 / 46	85 / 63 / 55	91 / 74 / 58	
Dimensions (W x H x D)	Body	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	900 x 270 x 700	
	Shipping	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	1,100 x 338 x 773	
Fan	Type	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	
	Motor Output x Number	W x No.	136 x 1	136 x 1	136 x 1	136 x 1	136 x 1	
	Air Flow Rate (H / M / L)	m³/min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
	External Static Pressure (High Mode)	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	9.0 / 7.5 / 6.0	9.5 / 7.5 / 6.0	11.0 / 9.0 / 7.0	16.0 / 12.0 / 9.0	17.0 / 14.5 / 12.0	19.0 / 16.0 / 14.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)	2.5 (25)
	External Static Pressure Range	mmAq (Pa)	2 (20) - 15 (147)	2 (20) - 15 (147)	2 (20) - 15 (147)	2 (20) - 15 (147)	2 (20) - 15 (147)	2 (20) - 15 (147)
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC	
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	
	Drain Pipe (Internal Dia.)	mm (inch)	25 (1)	25 (1)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)	
Weight	Body kg	25.0	25.0	25.0	25.0	25.0	25.9	
Sound Pressure Levels (H / M / L)	dB (A)	26 / 24 / 23	27 / 25 / 23	27 / 25 / 23	30 / 27 / 23	31 / 28 / 25	32 / 29 / 26	
Sound Power Levels (H / M / L)	dB (A)	55 / 54 / 51	55 / 54 / 52	56 / 54 / 52	59 / 57 / 55	59 / 57 / 55	59 / 58 / 56	
Power Supply	Ø / V / Hz	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	
Transmission Cable	mm²	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
5. Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU07GM1A4	ARNU09GM1A4	ARNU12GM1A4	ARNU15GM1A4	ARNU18GM1A4	ARNU24GM1A4
Drain Pump					○	
Cassette Cover					-	
Refrigerant Leakage Detector				PRLDNVS0 (R410a)		
EEV Kit				PRGK024A0 (-5.6kW)		
Multi-tenant Power Module				PINPMB001		
Robot Cleaner				-		
Pre Filter (Washable)				○		
Ion Generator				-		
CO ₂ Sensor				-		
Ventilation Kit				-		
IR Receiver				PWLRVN000		
Zone Controller				ABZCA		
Dry Contact (with Additional Accessory)				PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)		
External Input (1 Point)				○		
Wi-Fi				PWFMD200		

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU28GM2A4 / ARNU36GM2A4
ARNU42GM2A4 / ARNU48GM3A4
ARNU54GM3A4



MODEL	UNIT	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4	
Cooling Capacity	kW	8.2	10.6	12.3	14.1	15.8	
Heating Capacity	kW	9.2	11.9	13.8	15.9	18.0	
Power Input (H / M / L)	Nominal W	123 / 81 / 57	184 / 123 / 81	231 / 162 / 111	172 / 105 / 65	260 / 215 / 172	
Dimensions (W x H x D)	Body	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 270 x 700	1,250 x 360 x 700	1,250 x 360 x 700	
	Shipping	1,450 x 338 x 773	1,450 x 338 x 773	1,450 x 338 x 773	1,450 x 428 x 773	1,450 x 428 x 773	
Fan	Type	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	
	Motor Output x Number	W x No.	350 x 1	350 x 1	350 x 1	400 x 1	
	Air Flow Rate (H / M / L)	m³/min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
	External Static Pressure (High Mode)	mmAq (Pa)	6 (59)	6 (59)	6 (59)	6 (59)	6 (59)
	Air Flow Rate (H / M / L) (Standard Mode)	m³/min	28.0 / 24.0 / 21.0	32.0 / 28.0 / 24.0	38.0 / 33.0 / 28.0	40.0 / 34.0 / 28.0	50.0 / 45.0 / 40.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	5 (49)	5 (49)	5 (49)	5 (49)	5 (49)
	External Static Pressure Range	mmAq (Pa)	4 (39) - 18 (176)	4 (39) - 18 (176)	4 (39) - 18 (176)	4 (39) - 15 (147)	4 (39) - 15 (147)
Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	
Air Filter		Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)	
Weight	Body kg	36.0	36.0	37.2	42.2	42.2	
Sound Pressure Levels (H / M / L)	dB (A)	38 / 36 / 35	40 / 38 / 36	42 / 41 / 39	41 / 38 / 37	42 / 41 / 40	
Sound Power Levels (H / M / L)	dB (A)	59 / 57 / 55	60 / 59 / 57	62 / 61 / 60	63 / 60 / 59	65 / 64 / 62	
Power Supply	Ø / V / Hz	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	1,220 - 230 - 240, 50 / 60	
Transmission Cable	mm²	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	

- Note :
1. Due to our policy of innovation some specifications may be changed without notification.
2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
- Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
- Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
5. Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU28GM2A4	ARNU36GM2A4	ARNU42GM2A4	ARNU48GM3A4	ARNU54GM3A4
Drain Pump					○
Cassette Cover					-
Refrigerant Leakage Detector				PRLDNVS0 (R410a)	
EEV Kit				-	
Multi-tenant Power Module				PINPMB001	
Robot Cleaner				-	
Pre Filter (Washable)				○	
Ion Generator				-	
CO ₂ Sensor				-	
Ventilation Kit				-	
IR Receiver				PWLRVN000	
Zone Controller				ABZCA	
Dry Contact (with Additional Accessory)				PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)				○	
Wi-Fi				PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU76GB8A4 / ARNU96GB8A4



MODEL	UNIT	ARNU76GB8A4	ARNU96GB8A4
Cooling Capacity	kW	22.4	28.0
Heating Capacity	kW	25.2	31.5
Power Input (H / M / L)	Nominal W	765 / 500 / 500	800 / 750 / 750
Dimensions (W x H x D)	Body	1,562 x 460 x 688	1,562 x 460 x 688
	Shipping	1,806 x 537 x 825	1,806 x 537 x 825
Fan	Type	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	375 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	60.0 / 50.0 / 50.0
	External Static Pressure (High Mode)	mmAq (Pa)	22 (216)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	64.0 / 50.0 / 50.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	15 (147)
	External Static Pressure Range	mmAq (Pa)	10 (98) ~ 25 (245)
	Motor Type		BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 19.05 (3/4)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)
Weight	Body kg	87.0	87.0
Sound Pressure Levels (H / M / L)	dB (A)	45 / 41 / 40	47 / 42 / 41
Sound Power Levels (H / M / L)	dB (A)	67 / 62 / 60	68 / 64 / 62
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable	mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU76GB8A4	ARNU96GB8A4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVS0 (R410a)
EEV Kit		○
Multi-tenant Power Module		PINPMB001
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRVN000
Zone Controller		ABZCA
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU05GL1G4 / ARNU07GL1G4
ARNU09GL1G4

MODEL	Unit	ARNU05GL1G4	ARNU07GL1G4	ARNU09GL1G4
Cooling Capacity	kW	1.7	2.2	2.8
Heating Capacity	kW	1.9	2.5	3.2
Power Input (H / M / L)	Nominal W	29 / 26 / 24	31 / 28 / 24	39 / 29 / 24
Dimensions (W x H x D)	Body	700 x 190 x 700	700 x 190 x 700	700 x 190 x 700
	Shipping	862 x 255 x 781	862 x 255 x 781	862 x 255 x 781
Fan	Type	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1	
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	6.7 / 6.2 / 5.5	
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	6.7 / 6.2 / 5.5	
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	
	External Static Pressure Range	mmAq (Pa)	~ 5 (49)	
	Motor Type		BLDC	
Air Filter		Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	
	Gas Side	mm (inch)	Ø 12.7 (1/2)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	
Weight	Body kg	17.5	17.5	17.5
Sound Pressure Levels (H / M / L)	dB (A)	25 / 24 / 22	26 / 24 / 22	28 / 25 / 22
Sound Power Levels (H / M / L)	dB (A)	48 / 46 / 45	50 / 47 / 45	53 / 49 / 45
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable	mm ² x No.	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.


- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
- Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU05GL1G4	ARNU07GL1G4	ARNU09GL1G4
Drain Pump			○
Cassette Cover			-
Refrigerant Leakage Detector			PRLDNVS0
EEV Kit			PRGK024A0
Independent Power Module			PRIPO
Robot Cleaner			-
Pre Filter (Washable)			○
Ion Generator			-
CO ₂ Sensor			-
Ventilation Kit			-
IR Receiver			PWLRVN000
Zone Controller			ABZCA
Dry Contact (with Additional Accessory)			PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)			○
Wi-Fi			PWFMD200

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

ARNU12GL2G4 / ARNU15GL2G4
ARNU18GL2G4

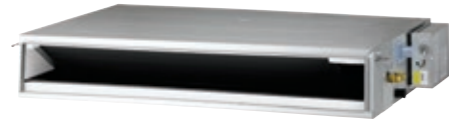

MODEL		Unit	ARNU12GL2G4	ARNU15GL2G4	ARNU18GL2G4
Cooling Capacity		kW	3.6	4.5	5.6
Heating Capacity		kW	4.0	5.0	6.3
Power Input (H / M / L)	Nominal	W	41 / 34 / 29	56 / 41 / 34	71 / 56 / 41
	Body	mm	900 x 190 x 700	900 x 190 x 700	900 x 190 x 700
Dimensions (W x H x D)	Shipping	mm	1,062 x 255 x 781	1,062 x 255 x 781	1,062 x 255 x 781
	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan
Fan	Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	10.0 / 8.5 / 7.0	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)	2.54 (25)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	10.0 / 8.5 / 7.0	12.5 / 10.0 / 8.5	15.0 / 12.5 / 10.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)	0 (0)
	External Static Pressure Range	mmAq (Pa)	- 5 (49)	- 5 (49)	- 5 (49)
	Motor Type		BLDC	BLDC	BLDC
	Air Filter		Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	Ø 25 (1)
Weight	Body	kg	23.0	23.0	23.0
	Sound Pressure Levels (H / M / L)	dB (A)	30 / 27 / 25	33 / 30 / 28	35 / 32 / 29
Sound Power Levels (H / M / L)	dB (A)	50 / 47 / 46	54 / 51 / 47	56 / 54 / 51	
Power Supply	Ø / V / Hz		1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable	mm ² x No.		1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

Note :
 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
 5. Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU12GL2G4	ARNU15GL2G4	ARNU18GL2G4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNVS0	
EEV Kit		-	
Independent Power Module		PRIP0	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		PWLRVN000	
Zone Controller		ABZCA	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	

※ ○ : Applied, - : Not applied
 Option : Refer to model name in table

ARNU21GL3G4 / ARNU24GL3G4



MODEL		Unit	ARNU21GL3G4	ARNU24GL3G4
Cooling Capacity		kW	6.2	7.1
Heating Capacity		kW	7.0	8.0
Power Input (H / M / L)	Nominal	W	72 / 53 / 48	103 / 63 / 48
	Body	mm	1,100 x 190 x 700	1,100 x 190 x 700
Dimensions (W x H x D)	Shipping	mm	1,262 x 255 x 781	1,262 x 255 x 781
	Type		Sirocco Fan	Sirocco Fan
Fan	Motor Output x Number	W x No.	19 x 2	19 x 2
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
	External Static Pressure (High Mode)	mmAq (Pa)	2.54 (25)	2.54 (25)
	Air Flow Rate (H / M / L) (Standard Mode)	m ³ /min	17.5 / 14.0 / 12.0	20.0 / 16.0 / 12.0
	External Static Pressure (Standard Mode)	mmAq (Pa)	0 (0)	0 (0)
	External Static Pressure Range	mmAq (Pa)	- 5 (49)	- 5 (49)
	Motor Type		BLDC	BLDC
	Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)
Weight	Body	kg	27.0	27.0
	Sound Pressure Levels (H / M / L)	dB (A)	35 / 29 / 28	36 / 33 / 28
Sound Power Levels (H / M / L)	dB (A)	59 / 55 / 54	63 / 59 / 55	
Power Supply	Ø / V / Hz		1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Communication Cable	mm ² x No.		1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

Note :
 1. Due to our policy of innovation some specifications may be changed without notification.
 2. Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 3. Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

4. Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
 5. Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.


Accessories

CHASSIS	ARNU21GL3G4	ARNU24GL3G4
Drain Pump		○
Cassette Cover		-
Refrigerant Leakage Detector		PRLDNVS0
EEV Kit		PRGK024A0
Independent Power Module		PRIP0
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		PWLRVN000
Zone Controller		ABZCA
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB300 (8 points for thermostat compatible), PDRYCB320 (Universal input), PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not applied
 Option : Refer to model name in table

Fresh Air

The LG Fresh Air Intake Unit (FAU) is the alternative solution for ventilation, which supplies the fresh outdoor air for indoors and simultaneously cools and heats the air inside. It means the indoor space can have positive air pressure consistently, which can block cold, hot or contaminated air from outside. This allows the indoor space to have consistent positive air pressure blocking cold air.

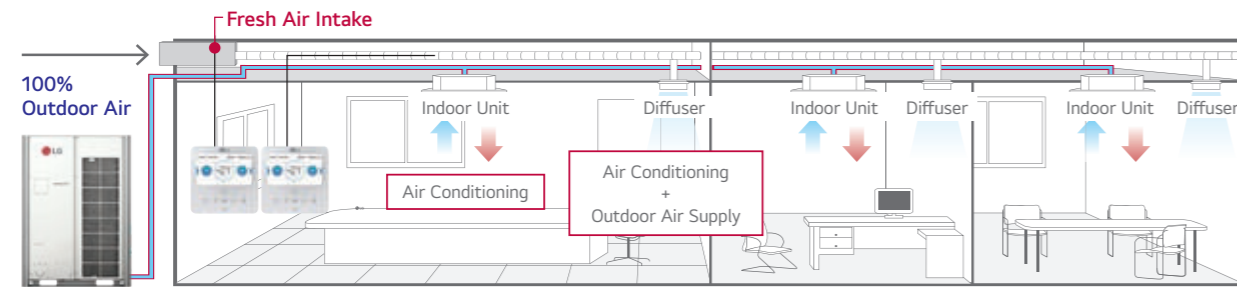


MULTI V i Outdoor unit

Season Changes


Natural outdoor air is utilized as seasons change for cost efficiency.

Spring Season

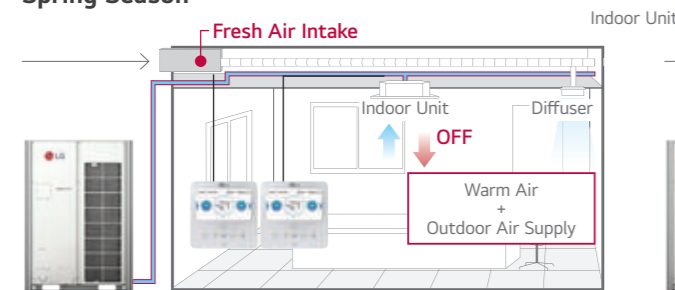


MULTI V i Outdoor unit

Autumn Season

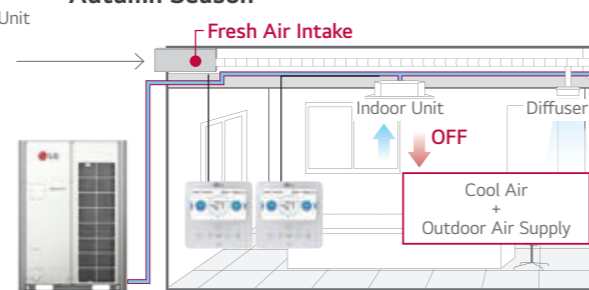

MULTI V i Outdoor unit

Installation Scene

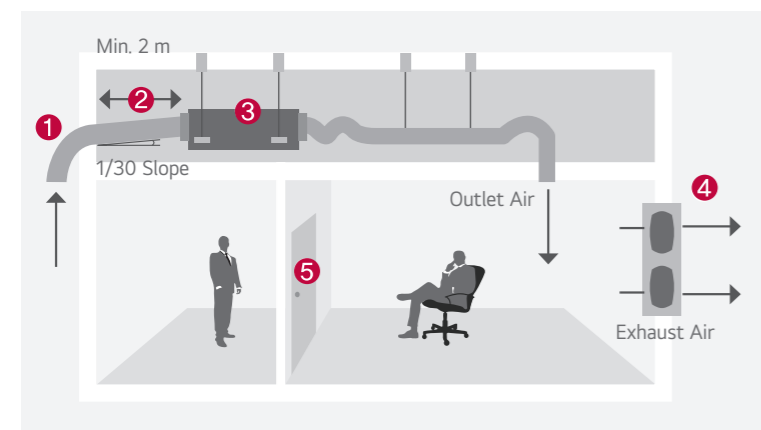

- 1 Inlet Hood
- 2 Intake Air Duct
- 3 Fresh Air Intake Unit
- 4 Exhaust Fan
- 5 Door

ARNU48GM3Z4 / ARNU76GB8Z4 / ARNU96GB8Z4



MODEL	UNIT	ARNU48GM3Z4	ARNU76GB8Z4	ARNU96GB8Z4	
Cooling Capacity	kW	14.1	22.4	28.0	
Heating Capacity	kW	13.5	21.4	26.7	
Power Input (H / M / L)	W	60 / 50 / 50	230 / 200 / 200	360 / 230 / 230	
Dimensions (W x H x D)	mm	1,250 x 360 x 700	1,562 x 460 x 688	1,562 x 460 x 688	
Fan	Type	Sirocco Fan	Sirocco Fan	Sirocco Fan	
	Motor Output x Number	W x No.	400 x 1	375 x 1	375 x 1
	Air Flow Rate (H / M / L) (High Mode-Factory Set)	m ³ /min	20 / 13.2 / 13.2	23.7 / 13.2 / 13.2	35.7 / 23.7 / 23.7
	External Static Pressure	mmAq (Pa)	6 (59)	22 (216)	22 (216)
	Motor Type		BLDC	BLDC	BLDC
Air Filter			Long Life Filter	Long Life Filter	
	Liquid Side	mm (inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	
Pipe Connections	Gas Side	mm (inch)	Ø 15.88 (5/8)	Ø 19.05 (3/4)	
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)	Ø 25 (1)	
			Ø 25 (1)	Ø 25 (1)	
Weight	kg	43.6	73.0	73.0	
Sound Pressure Levels (H / M / L)	dB (A)	38 / 36 / 34	45 / 43 / 43	47 / 45 / 45	
Sound Power Levels (H / M / L)	dB (A)	52 / 51 / 50	70 / 67 / 67	72 / 70 / 70	
Power Supply	Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	
Transmission Cable	mm ²	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	1.0 - 1.5 x 2 C	

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are based on the following conditions.
 - Cooling : Outdoor Temp. 33°CDB / 28°CWB, Interconnecting Piping Length 7.5 m / Level Difference of Zero
 - Heating : Outdoor Temp. 0°CDB / -2.9°CWB, Interconnecting Piping Length 7.5 m / Level Difference of Zero
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

CAUTION

- Operation range (Cooling : 5°C ~ 43°C, Heating : -5°C ~ 43°C)
- Installation of exhaust fan is recommended for a sealed room.
- Indoor Unit Connection

NO	CONNECTION CONDITION	COMBINATION
1	Fresh air intake units only are connected with outdoor units	1) The total capacity of fresh air intake unit should be 50 ~ 100% of outdoor unit. 2) The max quantity of fresh air intake is 4 units.
2	Mixture connection with general indoor unit and fresh intake units	1) The total capacity of indoor units (Standard Indoor Unit + Fresh Air Intake Unit) should be 50 ~ 100% of outdoor unit. 2) The total capacity of fresh air intake unit should be less than 30% of the total capacity of indoor units.

Accessories

CHASSIS	ARNU48GM3Z4	ARNU76GB8Z4	ARNU96GB8Z4
Drain Pump		○	
Cassette Cover		-	
Refrigerant Leakage Detector		PRLDNV50 (R410a)	
EEV Kit		-	
Multi-tenant Power Module		PINPMB001	
Robot Cleaner		-	
Pre Filter (Washable)		○	
Ion Generator		-	
CO ₂ Sensor		-	
Ventilation Kit		-	
IR Receiver		PWLRVN000	
Zone Controller		-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)		○	
Wi-Fi		PWFMD200	

※ ○ : Applied, - : Not applied
Option : Refer to model name in table



Features & Benefits

- Modern design with V-shape and black vane
- Powerful air speed and volume can reach up to 15 m

Key Applications

- Retail
- Restaurant
- Shop

	CEILINGS	CEILING & FLOOR CONVERTIBLE	CEILING SUSPENDED
Smart	Wi-Fi	○	○
Fast Cooling & Heating	Jet Cool	○	○
	Sleep mode	○	○
Comfort	Timer (On / Off)	○	○
	Timer (Weekly)	○	○
	Two thermistor control	○	○
	Group control	○	○


※ ○: Applied, - : Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

ThinQ

Search "ThinQ" on Google Store or the App Store to download the app.

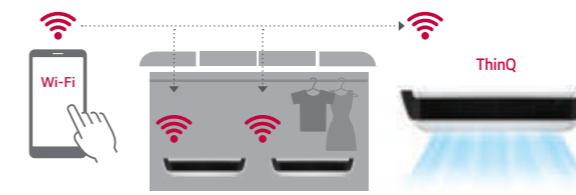

Easy Registration and Log-in

Follow the set-up steps that will activate ThinQ's feature.



※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

Flexible

The ceiling and floor models can be installed either on the ceiling or on the floor.




Filter Change Alarm

The filter change alarm informs you when the unit has been operating for 2,400 hours.



Air Flow Direction Control

Vertical air flow direction can be adjusted using remote controller, and horizontal air flow direction can be adjusted manually.

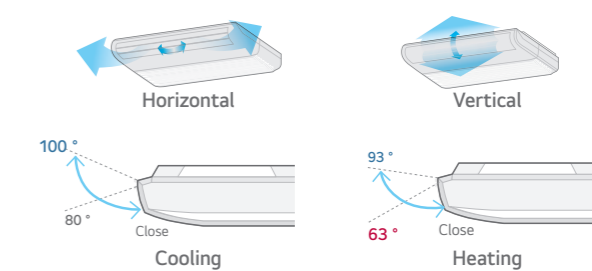

Modern Elegance Design

Design that fit in to any commercial space.




Powerful Cooling & Heating

High ceiling mode provides powerful cooling and heating up to 4.2 m in height from floor, 15 m away from ceiling.




One Touch & Two Piece Filter

Easy in / out filter structure as well as a simplified two-piece filter, which slides out for easy cleaning and maintenance.

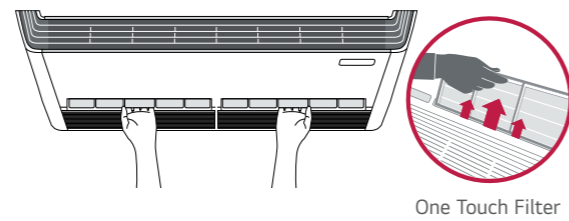

Two Thermistors Control

Users can purchase a wired remote controller that includes a second thermistor, allowing for temperature checks from multiple locations.

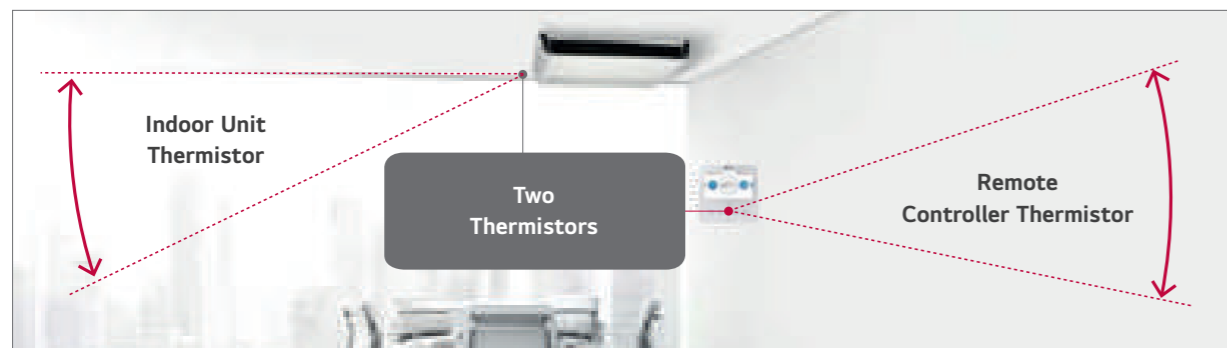

Lined area for notes, consisting of multiple horizontal lines for writing.

ARNU09GVEA4 / ARNU12GVEA4



MODEL		UNIT	ARNU09GVEA4	ARNU12GVEA4
Cooling Capacity		kW	2.8	3.6
Heating Capacity		kW	3.2	4.0
Power Input (H / M / L) Nominal		W	19 / 15 / 11	28 / 19 / 15
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	900 x 490 x 200	900 x 490 x 200
	Shipping	mm	975 x 562 x 279	975 x 562 x 279
Fan				
		Type	Cross Flow Fan	Cross Flow Fan
		Motor Output x Number	W x No. 27 x 1	27 x 1
		Air Flow Rate (H / M / L)	m ³ /min 7.6 / 6.9 / 6.2	9.2 / 7.6 / 6.9
			cfm 268 / 244 / 219	325 / 268 / 244
		Motor Type	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 16 (5/8)	Ø 16 (5/8)
Weight	Body	kg	13.3	13.3
Sound Pressure Levels (H / M / L)		dB (A)	36 / 32 / 28	38 / 36 / 30
Sound Power Levels (H / M / L)		dB (A)	55 / 51 / 45	56 / 55 / 49
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable		mm ² x cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
 - Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU09GVEA4	ARNU12GVEA4
Drain Pump	-	-
Refrigerant Leakage Detector		PRLDNVS0 (R410a)
EEV Kit		PRGK024A0
Multi-tenant Power Module		PINPMB001
Plasma Kit		-
Robot Cleaner		-
Pre Filter (Washable)		○
Ion Generator		-
CO ₂ Sensor		-
Ventilation Kit		-
IR Receiver		-
Zone Controller		-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		PWFMD200 ¹⁾

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU18GV1A4 / ARNU24GV1A4
ARNU36GV2A4 / ARNU48GV2A4



MODEL		UNIT	ARNU18GV1A4	ARNU24GV1A4	ARNU36GV2A4	ARNU48GV2A4
Cooling Capacity		kW	5.6	7.1	10.6	14.1
Heating Capacity		kW	6.3	8.0	11.9	15.9
Power Input (H / M / L) Nominal		W	23 / 20 / 17	25 / 21 / 17	84 / 77 / 66	91 / 79 / 66
Exterior Color			Morning Fog	Morning Fog	Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,200 x 235 x 690	1,200 x 235 x 690	1,600 x 235 x 690	1,600 x 235 x 690
	Shipping	mm	1,315 x 320 x 772	1,315 x 320 x 772	1,715 x 320 x 772	1,715 x 320 x 772
Fan						
		Type	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan	Cross Flow Fan
		Motor Output x Number	W x No. 85.9 x 1	85.9 x 1	125 x 1	125 x 1
		Air Flow Rate (H / M / L)	m ³ /min 13.5 / 12.5 / 12.0	14.0 / 13.0 / 12.0	27.0 / 24.0 / 20.0	29.0 / 24.0 / 20.0
		Motor Type	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 16 (5/8)	Ø 16 (5/8)	Ø 16 (5/8)	Ø 16 (5/8)
Weight	Body	kg	29.0	37.0	37.0	37.0
Sound Pressure Levels (H / M / L)		dB (A)	36 / 34 / 33	37 / 35 / 33	45 / 44 / 40.5	47 / 44 / 40.5
Sound Power Levels (H / M / L)		dB (A)	61 / 59 / 56	62 / 59 / 56	68 / 66 / 64	68 / 67 / 66
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable		mm ² x cores	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
 - Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU18GV1A4	ARNU24GV1A4	ARNU36GV2A4	ARNU48GV2A4
Drain Pump				-
Cassette Cover				-
Refrigerant Leakage Detector				PRLDNVS0 (R410a)
EEV Kit				-
Multi-tenant Power Module				PINPMB001
Robot Cleaner				-
Pre Filter (Washable)				○
Ion Generator				-
CO ₂ Sensor				-
Ventilation Kit				-
IR Receiver				-
Zone Controller				-
Dry Contact (with Additional Accessory)				PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)				○
Wi-Fi				PWFMD200

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table



Features & Benefits

- 6 way flexible piping
- Cold draft window protection
- Condensation protection

Key Applications

- Residential building
- Historical building
- Hotel

	FLOOR STANDING	CONSOLE	FLOOR STANDING
Smart	Wi-Fi	○	○
Energy Efficiency	Jet Cool	-	○
Health	Ionizer	○	-
Fast Cooling & Heating	Jet Cool	○	-
	Sleep Mode	○	○
Comfort	Timer (On / Off)	○	○
	Timer (Weekly)	○	○
	Two Thermistor Control	○	○
	Group Control	○	○

※ ○: Applied, - : Not applied

Wi-Fi Control

Access your air conditioner anytime and from anywhere.

ThinQ

Search "ThinQ" on Google Store or the App Store to download the app.




※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

Air Flow Direction

During the cooling operation, the vane adjusts upwards to direct the air flow towards the ceiling. When heating, the vane directs the warm air downwards to balance the room temperature especially for floor.


Cooling

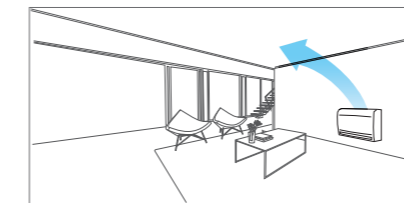

Heating (Normal)



Heating (Option)

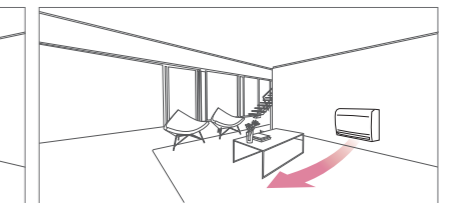


Cold Draft Protection

The console protects cold draft from windows to provide comfortable environment.




5-Step Vane Control

There are 5 different stages to control air flow direction.

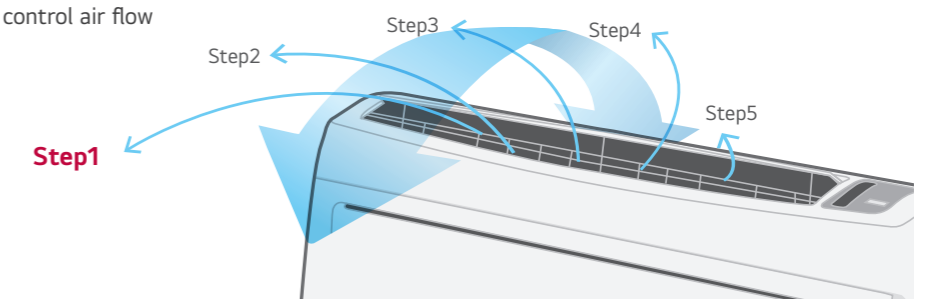

6 Way Flexible Piping

It is possible to install and connect the outdoor unit in 6 different ways.
(Right Side, Right Back, Right Floor, Left Side, Left Back, Left Floor)



ARNU07GQAA4 / ARNU09GQAA4




MODEL	UNIT	ARNU07GQAA4	ARNU09GQAA4
Cooling Capacity	kW	2.2	2.8
Heating Capacity	kW	2.5	3.2
Power Input (H / M / L)	Nominal W	15 / 12 / 10	15 / 12 / 10
Exterior Color		Morning Fog	Morning Fog
RAL Code		RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210
	Shipping	mm	775 x 662 x 284
Fan	Type		Turbo fan
	Motor Output x Number	W x No.	48 x 1
	Air Flow Rate (H / M / L)	m ³ /min	6.7 / 5.9 / 4.8
	Motor Type		BLDC
Air Filter		Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)
	Gas Side	mm (inch)	Ø 12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 12 (15/32)
Weight	Body	kg	14.0
Sound Pressure Levels (H / M / L)		dB (A)	37 / 34 / 28
Sound Power Levels (H / M / L)		dB (A)	53 / 50 / 44
Power Supply	Ø / V / Hz		1, 220 - 230 - 240, 50 / 60
Transmission Cable	mm ²		1.0 - 1.5 x 2 C


Protect Cold Draft

The floor standing unit protects cold draft coming from window and preventing condensation.

Without Floor Standing

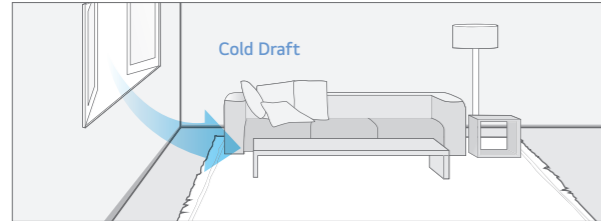


With Floor Standing

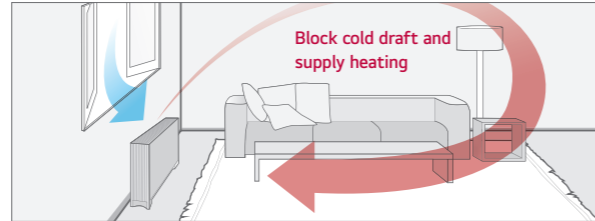

3 Way Flexible Piping


It is possible to install and connect the outdoor unit in 3 different ways. (Side, Back, Floor)

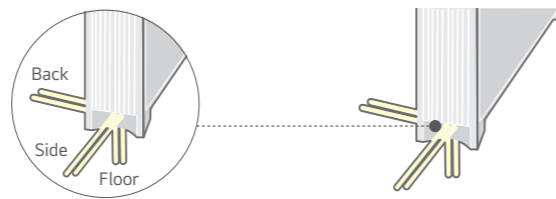


Sliding Type Filter

Easy maintenance and extended product life with sliding type filter.

Sliding type



Easy cleaning

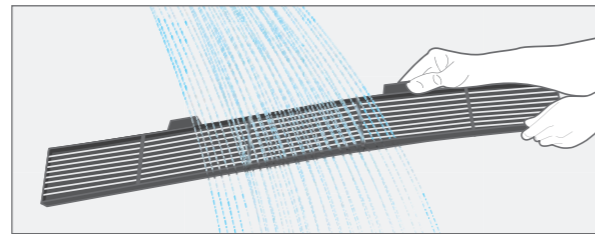

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.

- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU07GQAA4	ARNU09GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector		PRLDNV50 (R410a)
EEV Kit		PRGK024A0
Multi-tenant Power Module		PINPMB001
Robot Cleaner	-	-
Pre Filter (Washable)		○
Ion Generator		○
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)
External Input (1 Point)		○
Wi-Fi		PWFMD200

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU12GQAA4 / ARNU15GQAA4



MODEL		UNIT	ARNU12GQAA4	ARNU15GQAA4
Cooling Capacity		kW	3.6	4.5
Heating Capacity		kW	4.0	5.0
Power Input (H / M / L) Nominal		W	18 / 15 / 13	24 / 19 / 17
Exterior Color			Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	700 x 600 x 210	700 x 600 x 210
	Shipping	mm	775 x 662 x 284	775 x 662 x 284
Fan	Type		Turbo fan	Turbo fan
	Motor Output x Number	W x No.	48 x 1	48 x 1
	Air Flow Rate (H / M / L)	m ³ /min	7.5 / 5.9 / 4.8	8.7 / 6.7 / 5.9
	Motor Type		BLDC	BLDC
Air Filter			Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 12 (15/32)	Ø 12 (15/32)
Weight	Body	kg	14.0	14.0
Sound Pressure Levels (H / M / L)		dB (A)	39 / 34 / 28	42 / 37 / 31
Sound Power Levels (H / M / L)		dB (A)	56 / 50 / 44	58 / 53 / 50
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable		mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
 - Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU12GQAA4	ARNU15GQAA4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO (R410a)	
EEV Kit	PRGK024A0	
Multi-tenant Power Module	PINPMB001	
Robot Cleaner	-	-
Pre Filter (Washable)	○	○
Ion Generator	○	○
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with Additional Accessory)	PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)	
External Input (1 Point)	○	○
Wi-Fi	PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU07GCEA4 / ARNU09GCEA4
ARNU12GCEA4 / ARNU15GCEA4
ARNU18GCFA4 / ARNU24GCFA4



※ A : Floor Standing with case

MODEL		UNIT	ARNU07GCEA4	ARNU09GCEA4	ARNU12GCEA4	ARNU15GCEA4	ARNU18GCFA4	ARNU24GCFA4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L) Nominal		W	24 / 17 / 14	30 / 24 / 17	36 / 30 / 24	44 / 35 / 28	54 / 41 / 29	84 / 54 / 41
Exterior Color			Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog	Morning Fog
RAL Code			RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001	RAL 9001
Dimensions (W x H x D)	Body	mm	1,067 x 635 x 203	1,067 x 635 x 203	1,067 x 635 x 203	1,067 x 635 x 203	1,345 x 635 x 203	1,345 x 635 x 203
	Shipping	mm	1,154 x 705 x 289	1,154 x 705 x 289	1,154 x 705 x 289	1,154 x 705 x 289	1,432 x 705 x 289	1,432 x 705 x 289
Fan	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 2	19 x 2
	Air Flow Rate (H / M / L)	m ³ /min	8.5 / 7.5 / 6.5	9.5 / 8.5 / 7.5	10.5 / 9.5 / 8.5	11.5 / 10.0 / 9.5	16.0 / 14.0 / 12.0	18.0 / 16.0 / 14.0
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)
Weight	Body	kg	27.0	27.0	27.0	27.0	34.0	34.0
Sound Pressure Levels (H / M / L)		dB (A)	35 / 33 / 31	36 / 34 / 32	37 / 35 / 33	38 / 37 / 35	40 / 37 / 34	43 / 40 / 37
Sound Power Levels (H / M / L)		dB (A)	52 / 47 / 43	54 / 51 / 47	54 / 51 / 50	55 / 54 / 51	57 / 54 / 50	61 / 57 / 54
Power Supply		Ø / V / Hz	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60	1, 220 ~ 230 ~ 240, 50 / 60
Transmission Cable		mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
 - Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU07GCEA4	ARNU09GCEA4	ARNU12GCEA4	ARNU15GCEA4	ARNU18GCFA4	ARNU24GCFA4
Drain Pump	-	-	-	-	-	-
Cassette Cover	-	-	-	-	-	-
Refrigerant Leakage Detector		PRLDNVSO (R410a)			PRLDNVSO (R410a)	
EEV Kit		PRGK024A0				
Multi-tenant Power Module		PINPMB001			PINPMB001	
Robot Cleaner	-	-	-	-	-	-
Pre Filter (Washable)		○			○	
Ion Generator		-			-	
CO ₂ Sensor		-			-	
Ventilation Kit		-			-	
IR Receiver		PWLRVN000			PWLRVN000	
Zone Controller		-			-	
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 Point)		○			○	
Wi-Fi		PWFMD200			PWFMD200	

※ ○ : Applied, - : Not Applied
Option: Refer to model name in table

ARNU07GCEU4 / ARNU09GCEU4
 ARNU12GCEU4 / ARNU15GCEU4
 ARNU18GCFU4 / ARNU24GCFU4



※ U : Floor Standing without case

MODEL		UNIT	ARNU07GCEU4	ARNU09GCEU4	ARNU12GCEU4	ARNU15GCEU4	ARNU18GCFU4	ARNU24GCFU4
Cooling Capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Heating Capacity		kW	2.5	3.2	4.0	5.0	6.3	8.0
Power Input (H / M / L)	Nominal	W	24 / 17 / 14	30 / 24 / 17	36 / 30 / 24	44 / 35 / 28	54 / 41 / 29	84 / 54 / 41
	Body	mm	978 x 639 x 190	978 x 639 x 190	978 x 639 x 190	978 x 639 x 190	1,256 x 639 x 190	1,256 x 639 x 190
Dimensions (W x H x D)	Shipping	mm	1,055 x 702 x 260	1,055 x 702 x 260	1,055 x 702 x 260	1,055 x 702 x 260	1,333 x 702 x 260	1,333 x 702 x 260
	Type		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
Fan	Motor Output x Number	W x No.	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 1, 5 x 1	19 x 2	19 x 2
	Air Flow Rate (H / M / L)	m ³ /min	8.5 / 7.5 / 6.5	9.5 / 8.5 / 7.5	10.5 / 9.5 / 8.5	11.5 / 10.0 / 9.5	16.0 / 14.0 / 12.0	18.0 / 16.0 / 14.0
	Motor Type		BLDC	BLDC	BLDC	BLDC	BLDC	BLDC
Air Filter			Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter	Pre Filter
Pipe Connections	Liquid Side	mm (inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 9.52 (3/8)
	Gas Side	mm (inch)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
	Drain Pipe (Internal Dia.)	mm (inch)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)	Ø 12 (15/32)
Weight	Body	kg	21.0	21.0	21.0	21.0	25.0	25.0
Sound Pressure Levels (H / M / L)		dB (A)	35 / 33 / 31	36 / 34 / 32	37 / 35 / 33	38 / 37 / 35	40 / 37 / 34	43 / 40 / 37
Sound Power Levels (H / M / L)		dB (A)	52 / 47 / 43	54 / 51 / 47	54 / 51 / 50	55 / 54 / 51	59 / 57 / 53	63 / 59 / 57
Power Supply		Ø / V / Hz	1,220 ~ 230 ~ 240, 50 / 60	1,220 ~ 230 ~ 240, 50 / 60	1,220 ~ 230 ~ 240, 50 / 60	1,220 ~ 230 ~ 240, 50 / 60	1,220 ~ 230 ~ 240, 50 / 60	1,220 ~ 230 ~ 240, 50 / 60
Transmission Cable		mm ²	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

- Note :
- Due to our policy of innovation some specifications may be changed without notification.
 - Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
 - Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
 - Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor ~ indoor unit) is 0 m.
 - Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

Accessories

CHASSIS	ARNU07GCEU4	ARNU09GCEU4	ARNU12GCEU4	ARNU15GCEU4	ARNU18GCFU4	ARNU24GCFU4
Drain Pump						
Cassette Cover						
Refrigerant Leakage Detector		PRLDNVSO (R410a)			PRLDNVSO (R410a)	
EEV Kit		PRGK024A0				
Multi-tenant Power Module		PINPMB001			PINPMB001	
Robot Cleaner						
Pre Filter (Washable)		○			○	
Ion Generator						
CO ₂ Sensor						
Ventilation Kit						
IR Receiver		PWLRVN000			PWLRVN000	
Zone Controller						
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB320, PDRYCB400 (2 points input), PDRYCB500 (Modbus)				
External Input (1 Point)		○			○	
Wi-Fi		PWFMD200			PWFMD200	

※ ○ : Applied, - : Not Applied
 Option: Refer to model name in table



Features & Benefits

- The powerful air flow speed and volume can reach up to 20m away from the air conditioner

Key Applications

- Factory
- Retail
- Shop
- Office
- Restaurant

FLOOR STANDING (PAC)		FLOOR STANDING (PAC)	
Smart	Wi-Fi*		○
Energy Efficiency	Jet Cool		○
Health	Ionizer		-
Fast Cooling & Heating	Jet Cool		○
	Sleep Mode		○
Comfort	Timer (On / Off)		○
	Timer (Weekly)		-
	Two Thermistor Control		○
	Group Control		○


※ ○ : Applied, - : Not applied
 * Extra module is necessary for Wi-fi (module: PWFMD200)

Stylish Design

Winner of Red Dot design award 2013, is ideal for modern interiors.




reddot design award
winner 2013

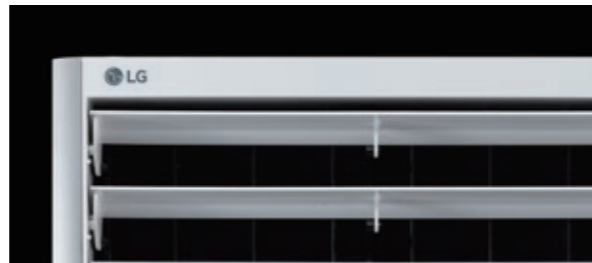

Powerful Air Flow

The new LG floor standing air conditioner is efficient in large areas due to its powerful cooling and heating operation. The powerful air flow speed and volume can reach up to 20 meter away from the air conditioner.

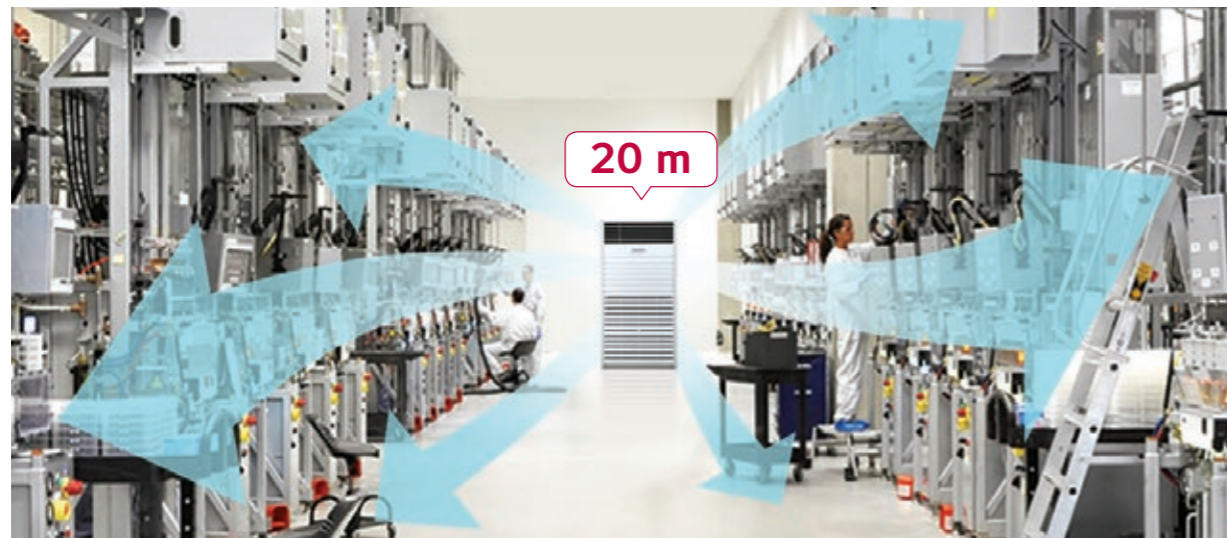

ARNU48GPTA4 / ARNU96GPFA4



MODEL	UNIT	ARNU48GPTA4	ARNU96GPFA4
Cooling Capacity	kW	14.1	28.0
Heating Capacity	kW	15.9	31.5
Power Input	Cooling (SH / H / M / L)	260 / 190 / 140 / 110	400 / 280 / - / 180
	Heating (SH / H / M / L)	260 / 190 / 140 / 110	400 / 280 / - / 180
FLA (Full Load Ampere)	A	1.3	2.3
Casing		Galvanized Steel Plate	
Dimensions (W×H×D)	Body	mm	590 × 1,840 × 440
	Rows × Columns ×FPI		3 ×38 ×19
Coil	Face Area	m ²	0.39
	Type		Blower Fan
Fan	Motor Output x Number	W	224 × 1
	Air Flow Rate (SH / H / M / L) (Standard Mode)	m ³ / min	37 / 33 / 28 / 24
	Drive		Direct
	Motor Type		BLDC
Temperature Control		Microprocessor, Thermostat for cooling and heating	
Sound Absorbing Thermal Insulation Material		Foamed Polystyrene	
Air Filter		-	-
Safety Device		Fuse	
Pipe Connections	Liquid Side	mm (inch)	9.52 (3/8)
	Gas Side	mm (inch)	15.88 (5/8)
	Drain(D)	mm	19
Net Weight	kg (lbs)	48 (105.8)	103 (227.0)
Sound Pressure Level (SH / H / M / L)		dB (A)	54 / 51 / 49 / 45
			60 / 57 / - / 53
Power Supply		∅ / V / Hz	1, 220, 60
			1, 220 - 230 ~ 240, 50 / 60
Refrigerant Control		EEV	
Communication Cable	mm ² (VCTF-SB)	1.0-1.5 x 2 C	

Note :

- Due to our policy of innovation some specifications may be changed without notification.
- Wiring cable size must comply with the applicable local and national code. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.
- Sound pressure level is measured on the rated condition in the anechoic rooms by ISO 3745 standard. Sound power level is measured on the rated condition in the semi-anechoic rooms by ISO 9614 standard. Therefore, these values can be increased owing to ambient conditions during operation.
- Capacities are net capacities and based on the following conditions. Refer to the outdoor unit specifications for calculating the real capacity.
 - Cooling : Indoor Ambient Temp. 27°CDB / 19°CWB, Outdoor Ambient Temp. 35°CDB / 24°CWB
 - Heating : Indoor Ambient Temp. 20°CDB / 15°CWB, Outdoor Ambient Temp. 7°CDB / 6°CWB
 - Interconnected Pipe is standard length and difference of elevation (outdoor - indoor unit) is 0 m.
- Refrigerant information (type, additional charging amount, etc.) must be applied by refrigerant type of the combined outdoor unit. Adapt after checking the specifications of outdoor unit.

VENTILATION SOLUTIONS


142 ~ 157

ERV / ERV WITH DX COIL
/ RESIDENTIAL ERV






Necessity of ERV

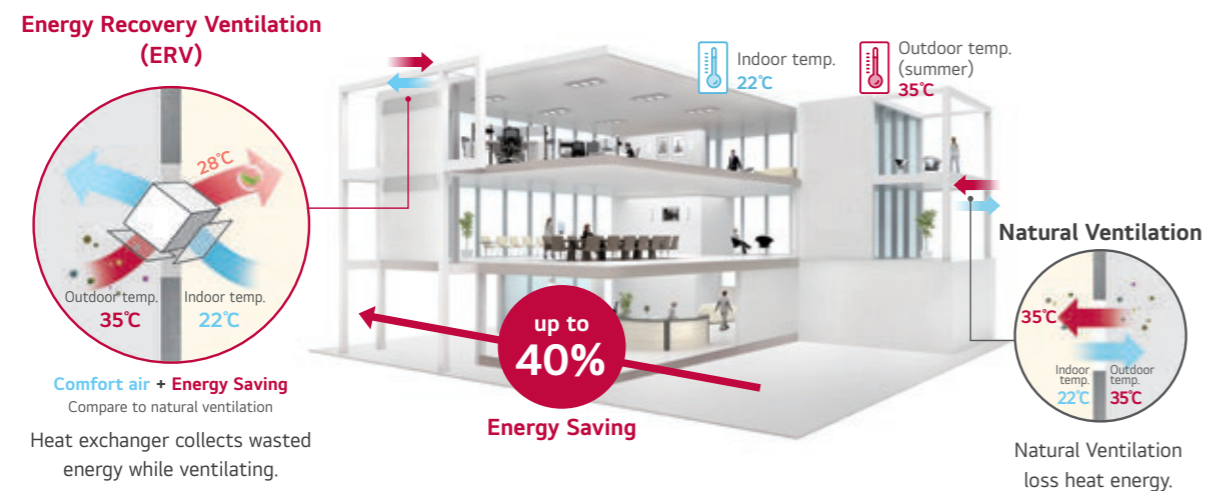


High Efficiency Heat Exchanger

Efficiency and comfort is ensured through the high-efficiency energy recovery central core which recovers energy from outgoing indoor air and transfers it to the fresh incoming air without mixing the air stream.

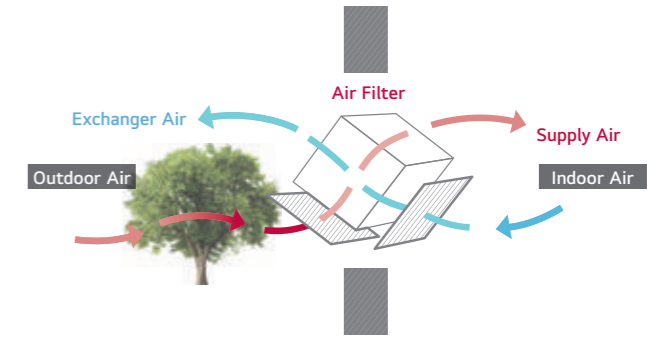


Cross Flow System

The exhaust system uses a high static sirocco fan to remove stale indoor air. Supply and exhaust air flows are completely separated in the heat exchanger, allowing the LG ERV to filter out particles before supplying outdoor air to ensure indoor air is fresh and healthy.

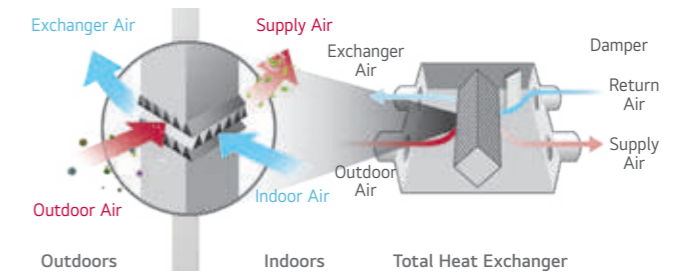

Night Time Free Cooling


During summer nights, indoor heat can be discharged outdoors and cool outdoor air can be brought indoors for energy savings.

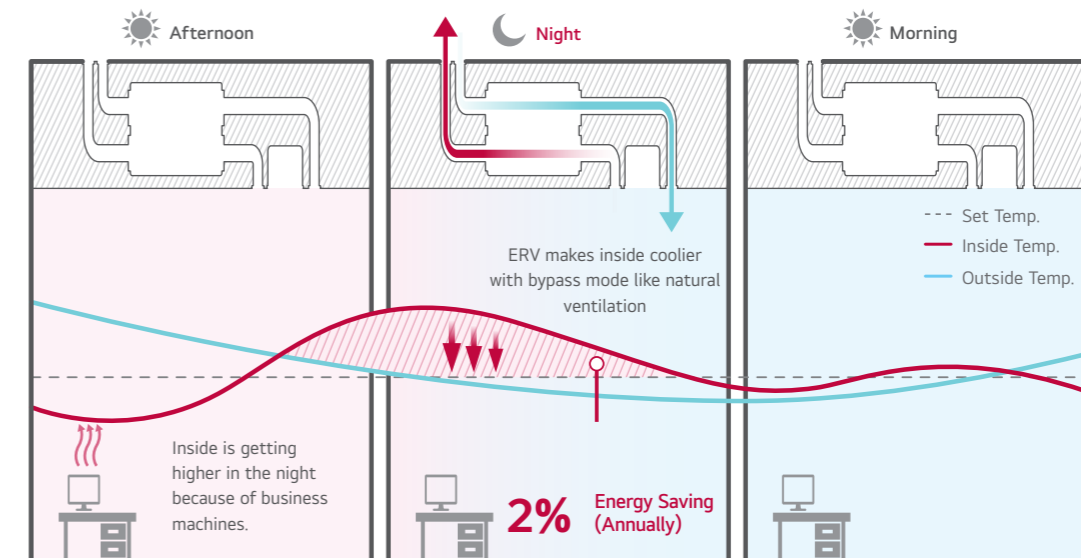

※ This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
 ※ Energy saving ratio can be differed by weather condition.
 ※ Test Condition
 - Office (49,000 ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1000 CMH) + MULTI V 4 (12 HP) Unit Combination
 - Other conditions are subject to BREEAM.

CO₂ Auto Operation


LG ERV reduces energy loss with auto fan speed control following CO₂ level.

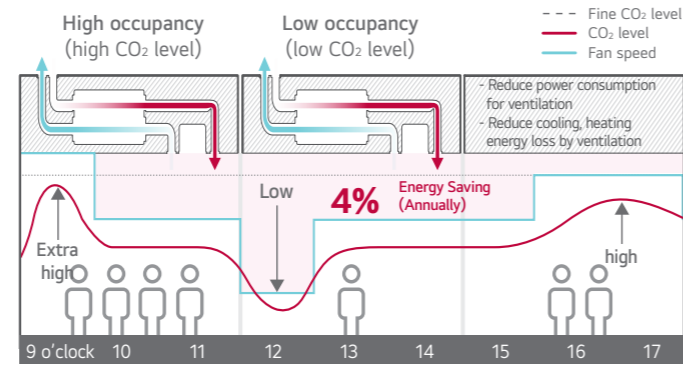

※ This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
 ※ Energy saving ratio can be differed by weather condition.
 ※ Test Condition - Office (49,000 ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1000 CMH) + MULTI V 4 (12 HP) Unit Combination
 - Other conditions are subject to BREEAM

Seasonal Auto Operation


LG ERV senses outdoor temperature and operates automatically following weather conditions.

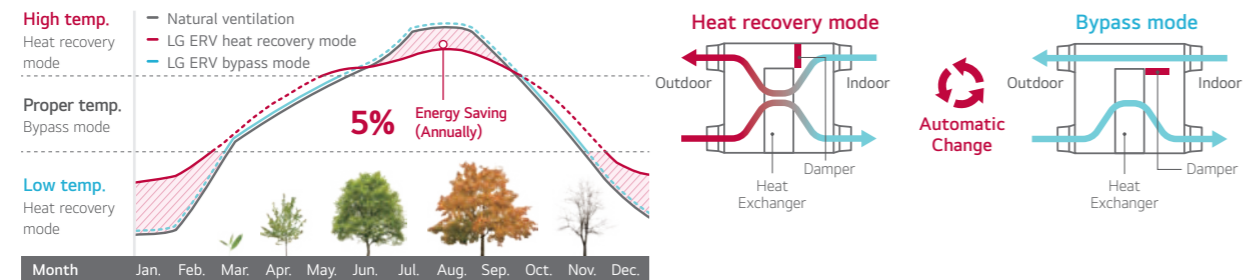

※ This function is operated with 'Auto' mode by wired remote control.
 ※ Energy saving ratio can be differed by weather condition.
 ※ Test Condition - Office (49,000 ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1,000 CMH) + MULTI V 4 (12 HP) Unit Combination
 - Other conditions are subject to BREEAM

Delay Operation

When the air conditioner and ERV are switched on simultaneously, delay operation can reduce unnecessary heating and cooling energy loss by slowing down automatic ERV operation.

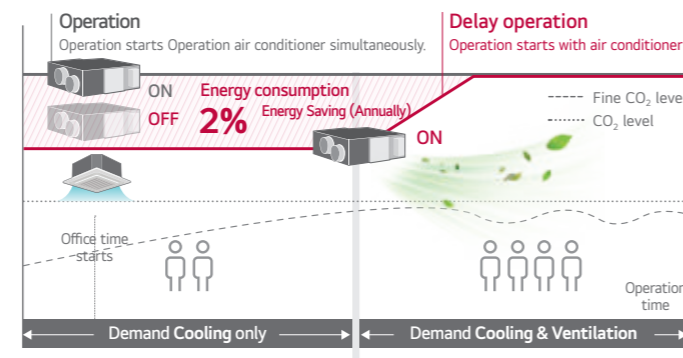

※ This function is operated with 'Night Time Free Cooling' on remote controller. (with MULTI V only)
 ※ Energy saving ratio can be differed by weather condition.
 ※ Test Condition - Office (49,000 ft²) / Occupancy : 30 / Area : London, UK
 - ERV (1000 CMH) + MULTI V 4 (12 HP) Unit Combination
 - Other conditions are subject to BREEAM

CO₂ Level Monitoring

CO₂ sensor senses CO₂ level in the room. Users can monitor CO₂ level on new wired remote controller, and ERV controls the fan speed automatically following the level.

CO₂ Level Visualization

CO₂ sensor senses indoor CO₂ level and displays it on new wired remote controller.




Main display

If the CO₂ level is above 900ppm in the room, the red mark is on.



Further information


CO₂ level and room condition are displayed continuously.



※ The remote controller screen image may change.
 ※ Applicable to only Standard III, Premium remote controller.

CO₂ Concentration Control

Using CO₂ sensor, LG ERV controls exhaust air flow automatically to keep indoor air fresh under settled CO₂ concentration.

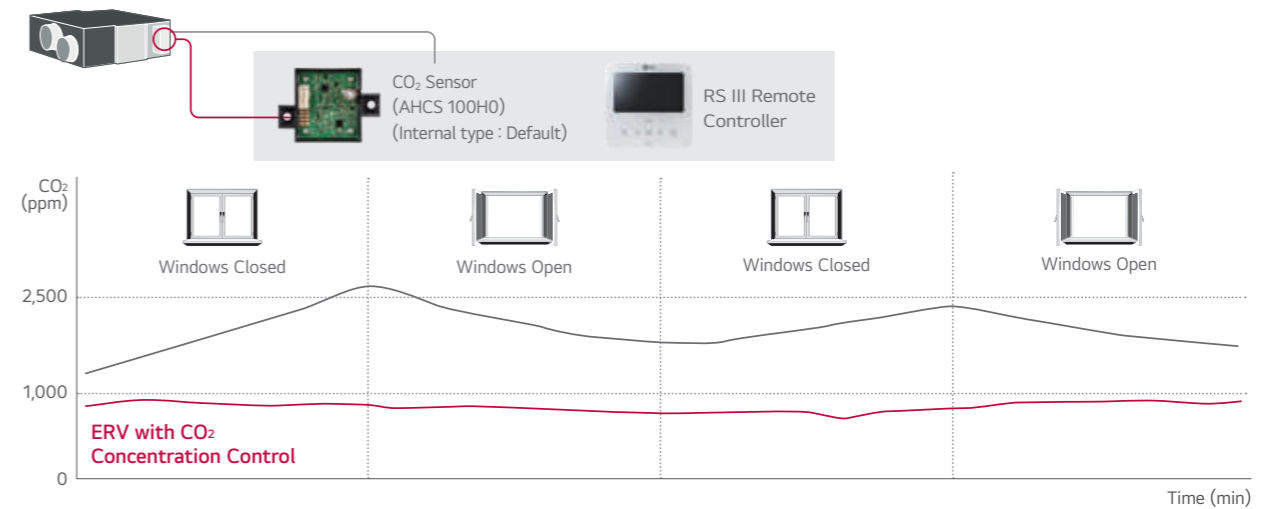

High Durability

There is no moving part within the heat exchanger and therefore it has higher durability and reliability. The heat exchanger is made of special thin paper membranes which are bacteria-resistant to prevent harmful bacteria growth, and flame-retardant treated for fire safety.



Easy Control

User friendly interface.



Easy

- Easy to navigate.
- Easy installation setting

Display

- Indoor CO₂ level
- Alarm for filter change / remaining time to change filters

Convenient


- User-friendly display
- Dual display with air conditioner information
- Zoom selected directory to increase legibility

Group Control

One wired remote controller up to 16 ERV (Including air conditioner). It is convenient for large spaces such as lobby.


Several units combination

16 units group control is available with 1 remote controller.

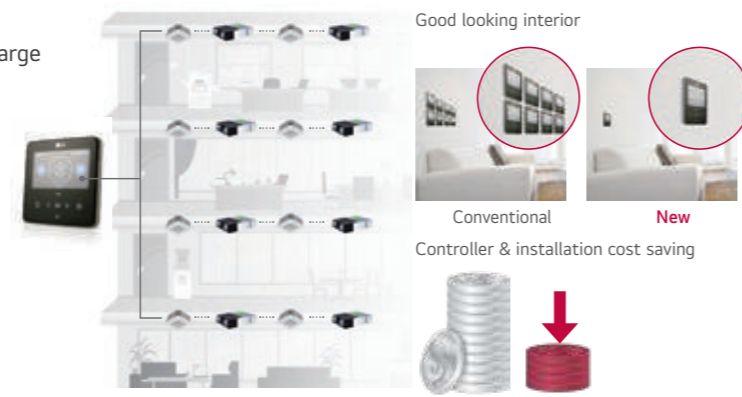

Interlocking with Air Conditioning System


- LG ERV can be interlocked with air conditioners and controlled individually.
- This function can be operated when the system is connected with 1 remote controller.

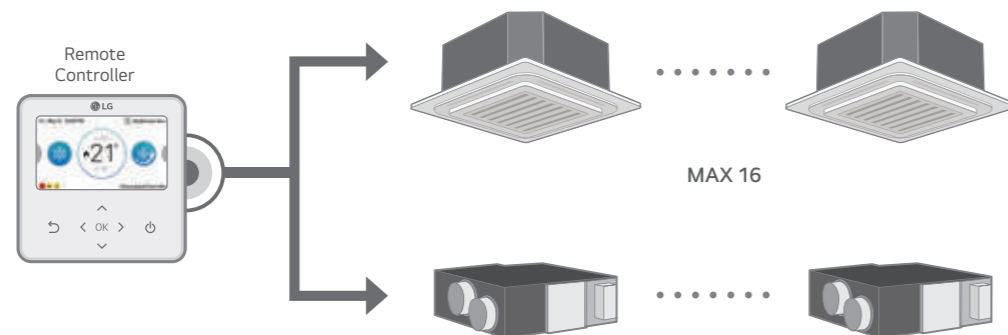

Fast Ventilation Mode


Fast ventilation mode prevents the spread of contaminants under negative indoor pressure, and makes indoor air fresh and comfortable quickly.

Only Exhausting

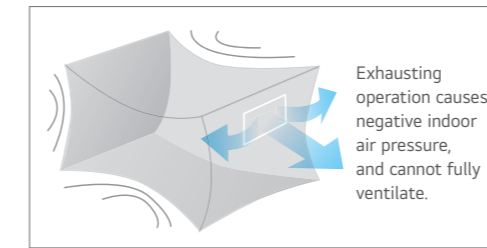


Exhausting and Supplying Simultaneously

Fast Ventilation Mode

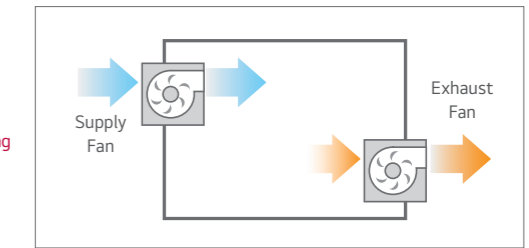


External Static Pressure Control

The high static pressure fan control the air volume of the duct depending on the length. The pressure level can be control using the remote controller for a more flexible duct installation and easier testing.

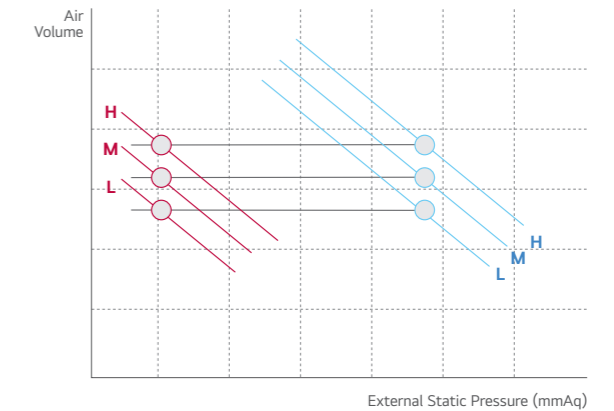

Easy Cleaning and Filter Change

Filter can be conveniently changed and cleaned.

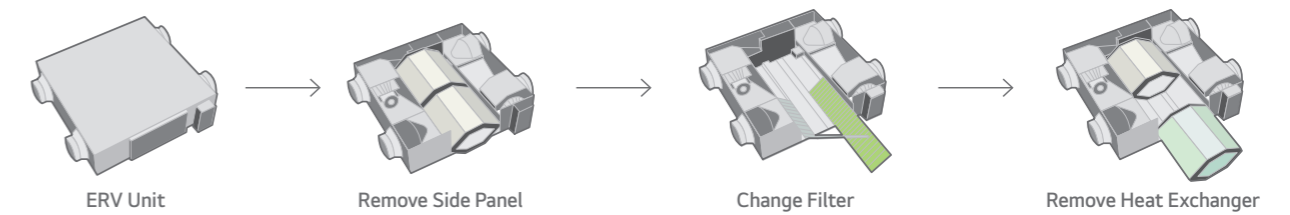

**LZ-H025GBA4 / LZ-H035GBA5
LZ-H050GBA5**


MODEL		UNIT	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5
Dimensions (W x H x D)	Body	mm	988 x 273 x 1,014		
	Weight	kg	44		
Power Supply		Ø / V / Hz	1, 220 ~ 240, 50		
Normal Air flow		m³/h	250	350	500
ERV Mode	Operating Step		Super-high / High / Low		
	Current	SH / H / L A	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80
	Power Input	SH / H / L W	97 / 87 / 52	150 / 125 / 60	247 / 230 / 95
	Air Flow	SH / H / L m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320
	External Static Pressure	SH / H / L Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50
	Temperature Exchange Efficiency	SH / H / L %	80 / 80 / 83	80 / 80 / 82	79 / 79 / 82
	Enthalpy Exchange Efficiency	Heating (SH / H / L) %	70 / 70 / 72	75 / 75 / 80	75 / 75 / 78
		Cooling (SH / H / L) %	66 / 66 / 68	71 / 71 / 75	68 / 68 / 75
	Energy Label	A+ to G Scale	A	B	B
	Sound Pressure Level	SH / H / L dB (A)	29 / 28 / 24	35 / 32 / 26	37 / 36 / 28
	Sound Power Level	SH / H / L dB (A)	50	53 / 50 / 42	57 / 56 / 46
	Bypass Mode	Operating Step		Super-high / High / Low	
Current		SH / H / L A	0.70 / 0.60 / 0.42	1.05 / 0.90 / 0.50	1.65 / 1.56 / 0.80
Power Input		SH / H / L W	97 / 87 / 52	150 / 125 / 60	247 / 230 / 95
Air Flow		SH / H / L m³/h	250 / 250 / 150	350 / 350 / 210	500 / 500 / 320
External Static Pressure		SH / H / L Pa	100 / 70 / 50	150 / 100 / 50	150 / 100 / 50
Sound Pressure Level		SH / H / L dB (A)	29 / 29 / 25	35 / 33 / 26	37 / 37 / 28
Duct Work	Qty	EA	4		
	Size (Ø)	mm	Ø 200		
Supply Air Fan	Qty	EA	1		
	Type		Direct-drive Sirocco		
Exhaust Air Fan	Qty	EA	1		
	Type		Direct-drive Sirocco		
Filters	Qty	EA	2		
	Type		Cleanable Fibrous Fleeces		
	Size (W x H x D)	mm	855 x 10 x 166		

Note :

- ERV mode : Total Heat Recovery Ventilation mode
- Refer to dimensional drawings.
- Noise level :
 - The operating conditions are assumed to be standard
 - Sound measured at 1.5 m below the center the body.
 - Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular room in which the equipment is installed.
 - The sound level at the air discharge port is about 8 dB (A) higher than the unit's operating sound.
- Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26.5°C DB, 64.5% RH, Outdoor Temperature : 34.5°C DB, 75% RH
- Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20.5°C DB, 59.5% RH, Outdoor Temperature : 5°C DB, 65% RH
- Temperature Exchange efficiency is tested at heating condition.

Accessories

CHASSIS	LZ-H025GBA4	LZ-H035GBA5	LZ-H050GBA5
Drain Pump		-	-
Cassette Cover		-	-
Refrigerant Leakage Detector		-	-
EEV Kit		-	-
Multi-tenant Power Module		-	-
Robot Cleaner		-	-
Pre Filter (Washable)		-	-
Ion Generator		-	-
CO ₂ Sensor		○	-
Ventilation Kit		-	-
IR Receiver		-	-
Zone Controller		-	-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB500 (Modbus)	
External Input (1 Point)		-	-
Wi-Fi		-	-

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

**LZ-H080GBA5 / LZ-H100GBA5
LZ-H150GBA5 / LZ-H200GBA5**


MODEL		UNIT	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5	
Dimensions (W x H x D)	Body	mm	1,101 x 405 x 1,230		1,353 x 815 x 1,230		
	Weight	kg	63		130		
Power Supply		Ø / V / Hz	1, 220 ~ 240, 50		1, 220 ~ 240, 50		
Normal Air flow		m³/h	800	1,000	1,500	2,000	
ERV Mode	Operating Step		Super-high / High / Low		Super-high / High / Low		
	Current	SH / H / L A	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80	
	Power Input	SH / H / L W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420	
	Air Flow	SH / H / L m³/h	800 / 800 / 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600	
	External Static Pressure	SH / H / L Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	
	Temperature Exchange Efficiency	SH / H / L %	82 / 82 / 83	80 / 80 / 81	82 / 82 / 83	80 / 80 / 81	
	Enthalpy Exchange Efficiency	Heating (SH / H / L) %	73 / 73 / 76	71 / 71 / 73	73 / 73 / 76	71 / 71 / 73	
		Cooling (SH / H / L) %	66 / 66 / 70	64 / 64 / 67	66 / 66 / 70	64 / 64 / 67	
	Sound Pressure Level	SH / H / L dB (A)	40 / 36 / 32	40 / 37 / 33	43 / 39 / 35	43 / 40 / 36	
	Sound Power Level	SH / H / L dB (A)	56 / 53 / 47	59 / 56 / 52	59 / 56 / 50	62 / 59 / 55	
	Bypass Mode	Operating Step		Super-high / High / Low		Super-high / High / Low	
		Current	SH / H / L A	2.13 / 1.75 / 1.00	2.92 / 2.38 / 1.40	4.26 / 3.50 / 2.00	5.92 / 4.76 / 2.80
Power Input		SH / H / L W	328 / 266 / 144	463 / 370 / 208	660 / 530 / 290	926 / 740 / 420	
Air Flow		SH / H / L m³/h	800 / 800 / 660	1,000 / 1,000 / 800	1,500 / 1,500 / 1,200	2,000 / 2,000 / 1,600	
External Static Pressure		SH / H / L Pa	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	160 / 100 / 50	
Sound Pressure Level		SH / H / L dB (A)	41 / 37 / 33	41 / 38 / 34	44 / 40 / 36	44 / 41 / 37	
Duct Work	Qty	EA	4		4 + 2		
	Size (Ø)	mm	Ø 250		Ø 250 + Ø 350		
Supply Air Fan	Qty	EA	1		2		
	Type		Direct-drive Sirocco		Direct-drive Sirocco		
Exhaust Air Fan	Qty	EA	1		2		
	Type		Direct-drive Sirocco		Direct-drive Sirocco		
Filters	Qty	EA	2		4		
	Type		Cleanable Fibrous Fleeces		Cleanable Fibrous Fleeces		
	Size (W x H x D)	mm	1,148 x 6 x 245		1,148 x 6 x 245		

Note :

- ERV mode : Total Heat Recovery Ventilation mode
- Refer to dimensional drawings.
- Noise level :
 - The operating conditions are assumed to be standard
 - Sound measured at 1.5 m below the center the body.
 - Sound level will vary depending on a range of factors such as the construction (acoustic absorption coefficient) of particular room in which the equipment is installed.
 - The sound level at the air discharge port is about 8 dB (A) higher than the unit's operating sound.
- Temperature and Enthalpy Exchange Efficiency at cooling Indoor Temperature : 26.5°C DB, 64.5% RH, Outdoor Temperature : 34.5°C DB, 75% RH
- Temperature and Enthalpy Exchange Efficiency at heating Indoor Temperature : 20.5°C DB, 59.5% RH, Outdoor Temperature : 5°C DB, 65% RH
- Temperature Exchange efficiency is tested at heating condition.


Accessories

CHASSIS	LZ-H080GBA5	LZ-H100GBA5	LZ-H150GBA5	LZ-H200GBA5
Drain Pump		-	-	-
Cassette Cover		-	-	-
Refrigerant Leakage Detector		-	-	-
EEV Kit		-	-	-
Multi-tenant Power Module		-	-	-
Robot Cleaner		-	-	-
Pre Filter (Washable)		-	-	-
Ion Generator		-	-	-
CO ₂ Sensor			○	-
Ventilation Kit		-	-	-
IR Receiver		-	-	-
Zone Controller		-	-	-
Dry Contact (with Additional Accessory)		PDRYCB000 (1 point contact), PDRYCB500 (Modbus)		
External Input (1 Point)		-	-	-
Wi-Fi		-	-	-

※ ○ : Applied, - : Not applied
Option : Refer to model name in table


Cool & Warm Fresh Air

During summer, ERV DX transformed outdoor warm air into cool air for indoors and prevent cold draft during the winter by supplying warm air.

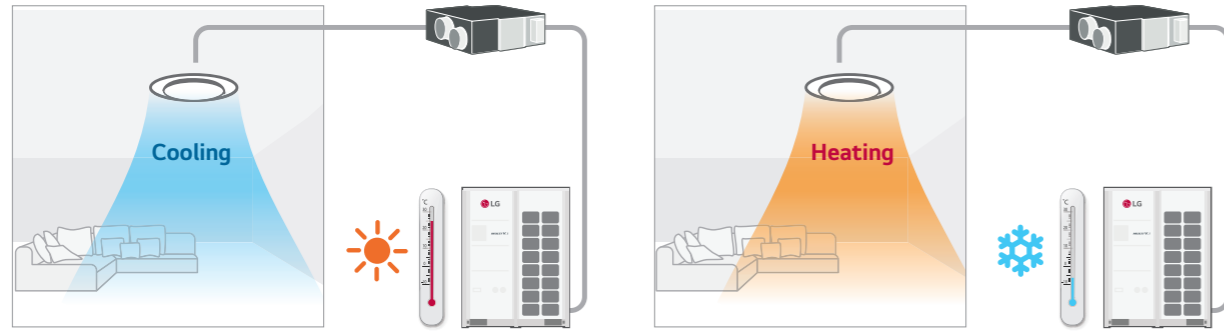


Total Air Conditioning Solution

LG ERV DX can be used as Total Air Conditioning Solution. It can control incoming air with the DX coil and humidifier making indoor air warmer or cooler. During summer, LG ERV DX provides air conditioning by cooling and dehumidifying incoming air. During winter, warm air is provided by heating and humidifying incoming air.

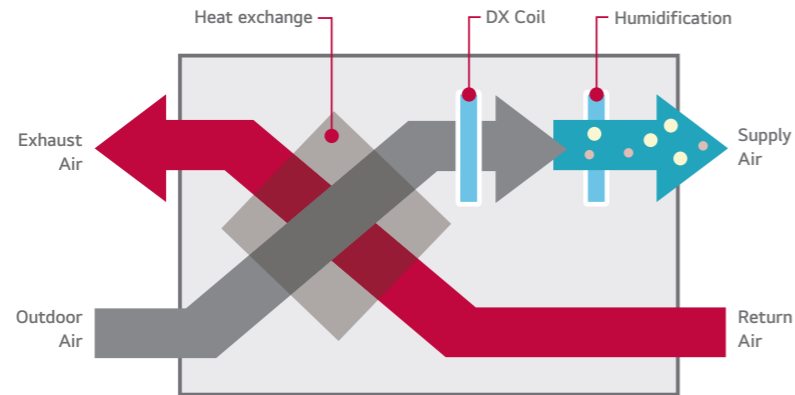

Interlocking with MULTI V

LG ERV DX can be interlocked with MULTI V. It can be controlled individually by a wired remote controller connected to MULTI V indoor units.

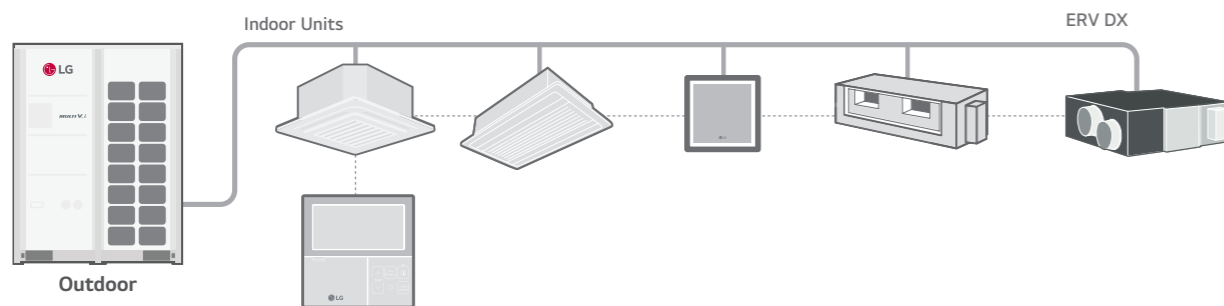

LZ-H050GXH4 / LZ-H080GXH4
LZ-H100GXH4 / LZ-H050GXN4
LZ-H080GXN4 / LZ-H100GXN4



MODEL		UNIT	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Fresh Air	Cooling	kW	4.93	7.46	9.12	4.93	7.46	9.12
Conditioning Load	Heating	kW	6.73	9.80	11.72	6.73	9.80	11.72
Temperature	SH / H / L	%	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78	86 / 86 / 87	80 / 80 / 81	76 / 76 / 78
Enthalpy Exchange	Cooling (SH / H / L)	%	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50	61 / 61 / 63	50 / 50 / 53	45 / 45 / 50
Efficiency	Heating (SH / H / L)	%	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66	76 / 76 / 77	67 / 67 / 69	64 / 64 / 66
Operation Range	Outdoor air Temperature	°C	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45	-15 ~ 45
Air Flow Rate	Heat Exchange Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
	Bypass Mode (SH / H / L)	CMH	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820	500 / 500 / 440	800 / 800 / 640	1,000 / 1,000 / 820
Fan	External Static Pressure (SH / H / L)	Pa	160 / 120 / 100	140 / 90 / 70	110 / 70 / 60	180 / 150 / 110	170 / 120 / 80	150 / 100 / 70
	System		Natural Evaporating Type			-		
Humidifier	Amount	kg/h	2.70	4.00	5.40	-		
	Pressure Feed Water	Mpa	0.02 ~ 0.49			-		
Sound Pressure	Heat Exchange Mode (SH / H / L)	dB (A)	38 / 36 / 33	39 / 37 / 34	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
	Bypass Mode (SH / H / L)	dB (A)	39 / 37 / 34	40 / 38 / 35	40 / 38 / 35	39 / 37 / 35	41 / 38 / 36	41 / 39 / 36
Refrigerant		R410A						
Power Supply		Ø / V / Hz 1, 220 ~ 240, 50 / 60						
Power Input (Nominal)	Heat Exchange Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
	Bypass Mode (SH / H / L)	kW	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27	0.25 / 0.20 / 0.15	0.42 / 0.35 / 0.25	0.48 / 0.42 / 0.27
Nominal Running Current (RLA)	Heat Exchange Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
	Bypass Mode (SH / H / L)	A	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3	1.5 / 1.3 / 1.0	2.5 / 2.0 / 1.5	3.6 / 3.2 / 2.3
Heat Exchange System		Air to Air Cross Flow Total Heat (Sensible + Latent Heat) Exchange			Air to Air Cross Flow Total Heat (Sensible + Latent Heat) Exchange			
Heat Exchange Element		Specially Processed Non-flammable Paper			Specially Processed Non-flammable Paper			
Air Filter		Multidirectional Fibrous Fleeces			Multidirectional Fibrous Fleeces			
Dimensions	W x H x D	mm	1,667 x 365 x 1,140			1,667 x 365 x 1,140		
Net Weight		kg	105			98		
	Liquid	mm	Ø 6.35			Ø 6.35		
Piping	Gas	mm	Ø 12.7			Ø 12.7		
	Water	mm	Ø 6.35			-		
Connection	Drain Pipe (Internal Dia.)	mm (inch)	Ø 25 (1)			Ø 25 (1)		
	Connection Duct Diameter	mm	Ø 250			Ø 250		

Note :

1. Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
2. Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
3. Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
4. Cooling and heating capacities are based on the following conditions : Fan is based on High and Super-high.
5. The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.
6. The specifications, designs and information here are subject to change without notice.

Accessories

CHASSIS	LZ-H050GXH4	LZ-H080GXH4	LZ-H100GXH4	LZ-H050GXN4	LZ-H080GXN4	LZ-H100GXN4
Drain Pump	-	-	-	-	-	-
Cassette Cover	-	-	-	-	-	-
Refrigerant Leakage Detector	-	-	-	PRLDNVSO	-	-
EEV Kit	-	-	-	-	-	-
Multi-tenant Power Module	-	-	-	-	-	-
Robot Cleaner	-	-	-	-	-	-
Pre Filter (Washable)	-	-	-	-	-	-
Ion Generator	-	-	-	-	-	-
CO ₂ Sensor	-	-	-	AHCS100H0	-	-
Ventilation Kit	-	-	-	-	-	-
IR Receiver	-	-	-	-	-	-
Zone Controller	-	-	-	-	-	-
Dry Contact (with Additional Accessory)	-	-	-	-	-	-
External Input (1 Point)	-	-	-	-	-	-
Wi-Fi	-	-	-	-	-	-

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

Supply Clean Air

Remove Up to 99.99% of Harmful Particles on Pre-Filter with UVnano

UVnano
UVnano is a compound word of UV (ultraviolet) LED which reduces harmful bacteria, and nanometer which is the UV wavelength unit.

Pre-Filter
UV-LED

UVnano Technology Applied
It Prevents 99.99% of Bacteria and Viruses from Growing

Easy Filter Maintenance

The one-touch button allow user to open the access door at the bottom of the unit, to pull down the heat exchanger and change the filters. It is easy and simple without the need of any additional tools.

Filter Handle
One Touch Button


After pressing the one-touch button, unhook the safety hooks that holds door from failing to fully open the door.

Hold the filter handle and pull it out down.

Smart Control

① Dual Laser Fine Dust Sensor

Two fine dust sensors monitor the incoming air in real time to ensure that clean air is always supplied.

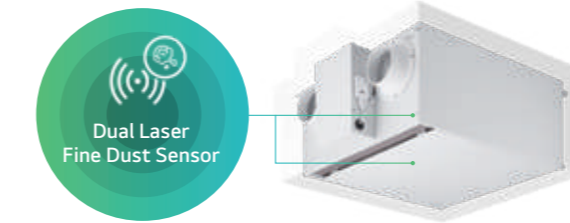


When the measured dust concentration in the air supplied to the room is higher than the pre-set value, a notification or text message will be sent out for filter replacement.

* Wi-Fi Modem is Optional.




② CO₂ Monitoring

The embedded CO₂ sensor monitors the carbon dioxide concentration in the room in real time and automatically controls the ventilation rate.

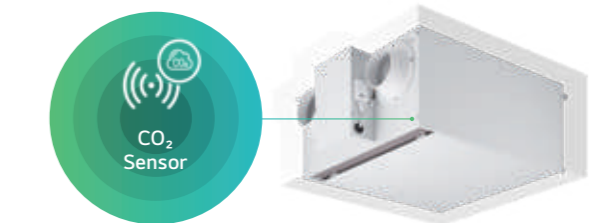

When the concentration of carbon dioxide is high, and automatically reduces the ventilation rate.

* Wi-Fi Modem is Optional.

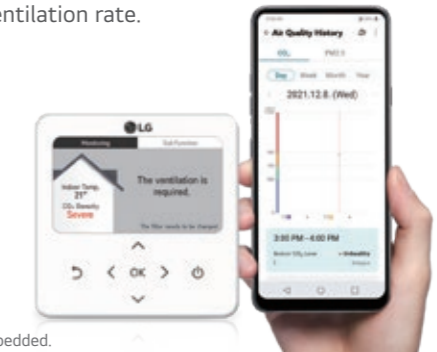

* CO₂ Sensor is Embedded.

③ Control ERV Anytime, Anywhere

Wired Remote Control	Mobile	Third-Party Compatibility
<ul style="list-style-type: none"> - Indoor CO₂ concentration - Dust concentration in the supply air - Dust concentration in outdoor air 	<p>Check and Control the Indoor air conditioner Anytime, Anywhere</p>	<p>With the dry contact connected, Modbus protocol is available.</p>

* To use 3rd party wall pad, please contact Sales Engineer.

④ Filter Maintenance Alarm

The filter replacement notification and text message are sent when the fine dust concentration is higher than the pre-set point.

When Should the Filter be Replaced?

Replace the fine dust filter in ERV.

Vent
Turn off after 15min
Bypass >

CO₂ Good

Supplied Air Quality → Good
Overall Outdoor Air Quality → Good
Indoor Temperature 18.8

LZ-H015GBA6 / LZ-H020GBA6



MODEL		UNIT	LZ-H015GBA6	LZ-H020GBA6	
Dimensions (W x H x D)	Body	mm	640 x 320 x 640	640 x 320 x 640	
	Weight	kg	23	23	
Power Supply		Ø / V / Hz	1, 230, 50	1, 230, 50	
ERV Mode	Operating Step		SH / H / L	SH / H / L	
	Current	SH / H / L A	0.43 / 0.38 / 0.23	0.59 / 0.51 / 0.26	
	Power Input	SH / H / L W	56 / 49 / 26	79 / 71 / 30	
	Air Flow	SH / H / L CMH	150 / 150 / 80	200 / 200 / 100	
	External Static Pressure	SH / H / L Pa	100 / 70 / 50	100 / 70 / 50	
	Temperature Exchange Efficiency	Heating (SH / H / L) (ErP) %		85	82
		Heating (SH / H / L) (JIS) %		80 / 80 / 84	78 / 78 / 82
	Cooling (SH / H / L) (JIS) %			74 / 74 / 83	70 / 70 / 81
		Enthalpy Exchange Efficiency	Heating (SH / H / L) (JIS) %	79 / 79 / 83	75 / 75 / 81
	Cooling (SH / H / L) (JIS) %			74 / 74 / 80	68 / 68 / 76
		Energy Label	A+ to G Scale	A	A
	Sound Power Level	SH / H / L dB (A)	53 / 51 / 45	55 / 53 / 46	
	Sound Pressure Level	SH / H / L dB (A)	28 / 26 / 21	30 / 28 / 22	
Bypass Mode	Current	SH / H / L A	0.45 / 0.40 / 0.26	0.60 / 0.52 / 0.29	
	Power Input	SH / H / L W	63 / 53 / 31	84 / 73 / 35	
	Air Flow	SH / H / L CMH	150 / 150 / 80	200 / 200 / 100	
External Static Pressure	SH / H / L Pa	100 / 70 / 50	100 / 70 / 50		
Operation Range	Outdoor Air Temperature / Relative Humidity	°C / %	-10 ~ 40 / 20 ~ 80	-10 ~ 40 / 20 ~ 80	
Duct Work	Qty	EA	4	4	
	Size (Ø)	mm	125	125	
Fan Motor	Supply Air Fan	RPM	1,850 / 1,710 / 1,300	2,050 / 1,910 / 1,400	
	Exhaust Air Fan	RPM	1,750 / 1,600 / 1,250	1,910 / 1,770 / 1,320	
	Max.	RPM	2,100	2,100	
	Min.	RPM	1,000	1,000	
Filters	Grade ⁽¹⁾	-	ePM ₁ 95%	ePM ₁ 95%	
	Size (W x H x D)	mm	278 x 276 x 50	278 x 276 x 50	

Note :

- Cooling Capacity Test condition - Indoor temperature : 27°C DB, 19°C WB / Outdoor temperature : 35°C DB
- Heating Capacity Test condition - Indoor temperature : 20°C DB / Outdoor temperature : 7°C DB, 6°C WB
- Humidifying capacity is based on the following conditions - Indoor temperature : 20°C DB, 15°C WB / Outdoor temperature : 7°C DB, 6°C WB
- Cooling and heating capacities are based on the following conditions. : Fan is based on High and Super-high.
- The operating sound measured at the point 1.5 m below the center of the unit is converted to that measured at an anechoic chamber.
- The specifications, designs and information here are subject to change without notice.

Accessories

CHASSIS	LZ-H015GBA6	LZ-H020GBA6
CO ₂ Sensor		Embedded
UVnano		Embedded
Pre Filter (Washable)		Embedded
Dual Laser Fine Dust Sensor		Embedded
Remote Controller (PREMTB101 / PREMTB11)		○
Wi-Fi Modem (PWFMD200)		○

※ ○ : Applied, - : Not applied
Option : Refer to model name in table

Functions

MODEL	LZ-H015GBA6	LZ-H020GBA6
Air Purification	UVnano	○
	Pre-Filter	○
	Fine Filter (ePM ₁ 95%)	○
Reliability	Self Diagnosis	○
	Auto Restart	○
Convenience	Child Lock*	○
	Forced Operation	○
	Group Control*	○
	Turn On / Off Reservation	○
	Schedule*	○
	Night Silent Cooling Operation	○
	Delayed Operation	○
	Airflow Amount Customized Operation	○
	Seasonal Customized Operation	○
	Seasonal Auto Operation	○
Installation	E.S.P. Control*	○
	Central Control (LGAP)	○
ETC	Filter Alarm	○
	CO ₂ Sensor	○
	Wi-Fi	Accessory

Note

- : Applied, X : Not applied
Accessory : Ordered and purchased separately the accessory package referring to the model name provided and install at field.
Accessory line-ups varies by region, so check your local catalogue or local sales material.
- Some functions can be limited by remote controller.
- * : These functions need to connect the wired remote controller.

HOT WATER SOLUTION

158 ~ 169

HYDRO KIT

COMPATIBILITY &
FEATURE FUNCTIONS




HYDRO KIT

Features & Benefits

- Lower operation cost compared to fossil fuel-based systems such as boilers.
- More energy saving through MULTI V heat recovery system.

Key Applications

- Hot Water use for domestic, underfloor heating, or radiator, and cold water is needed for Fan coil unit and chilled beam.

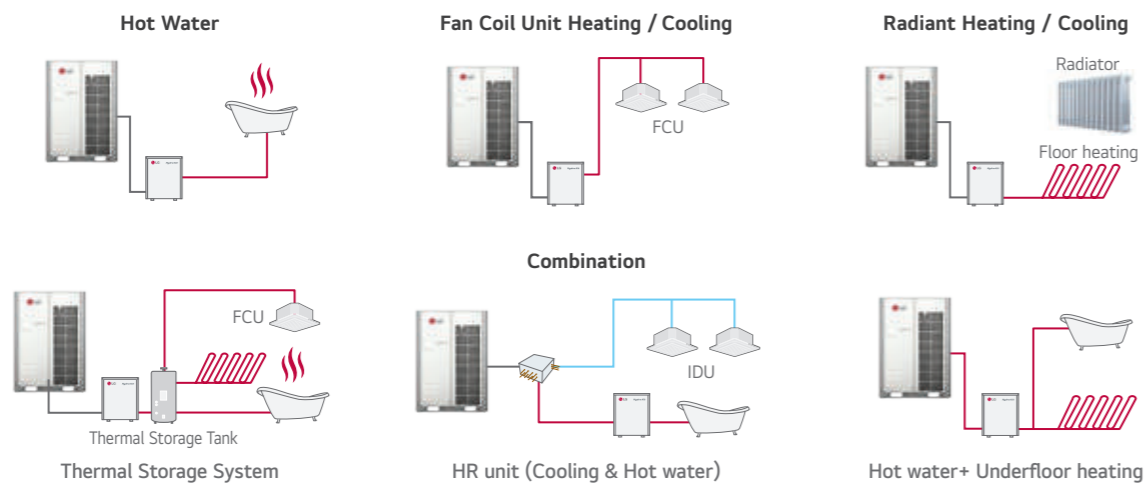

Eco-conscious Solution


Green energy solution through the reduction of CO₂ emissions.



Energy Savings through Heat Recovery


Air-conditioner + Domestic hot water

Absorbed heat is released to the outdoor air.

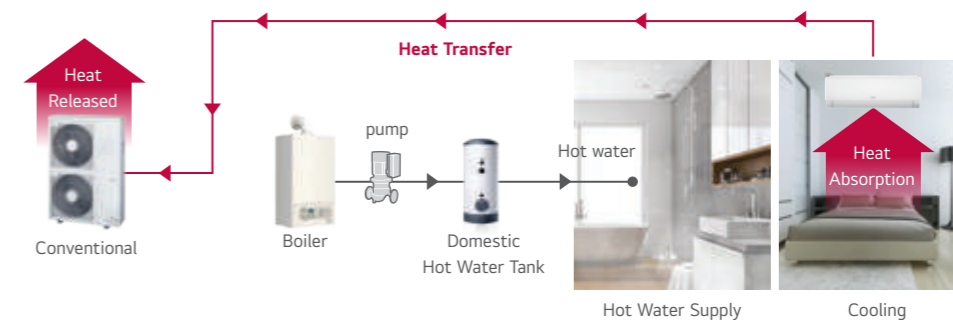


HYDRO KIT

Absorbed heat from indoor space is used for making hot water.

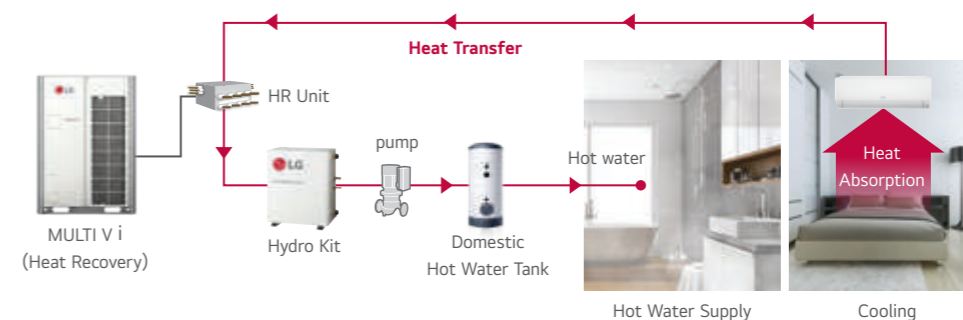


Total Solution

Total solution provided with heat pump, air conditioning (Cooling by refrigerant and cold water / heating by refrigerant hot water) and domestic hot water supply.

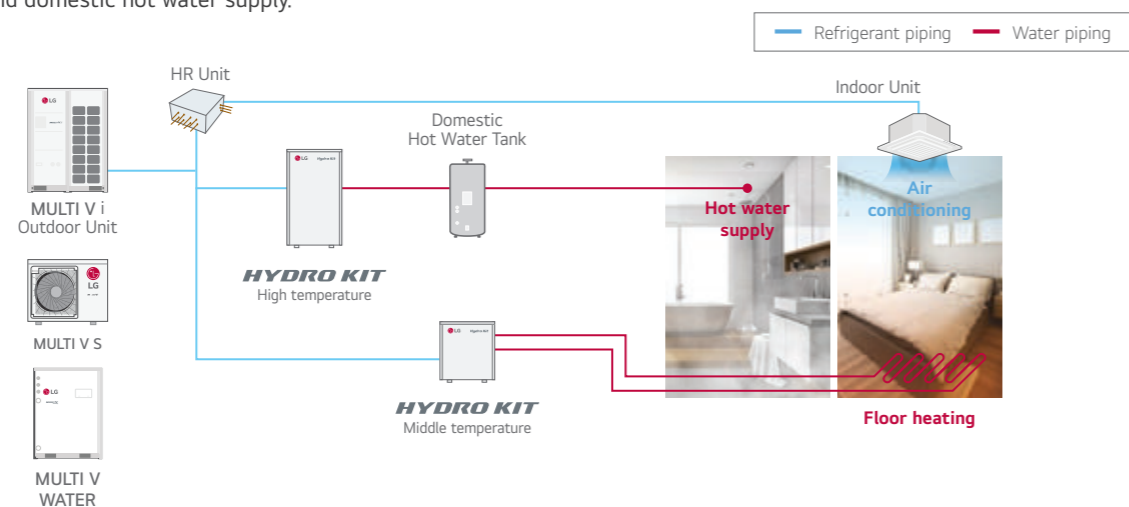

High Temperature HYDRO KIT Cycle Diagram

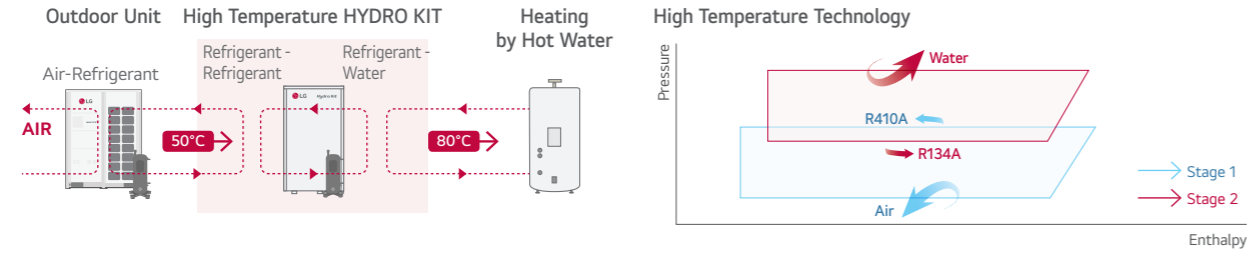


Various Applications

Applicable to a variety of facilities including hospitals, residences and resorts that need heating and domestic hot water supply.




Hotel Application

Simultaneous cooling and heating operation during summer to produce hot water by using heat energy recovered from indoor cooling process.

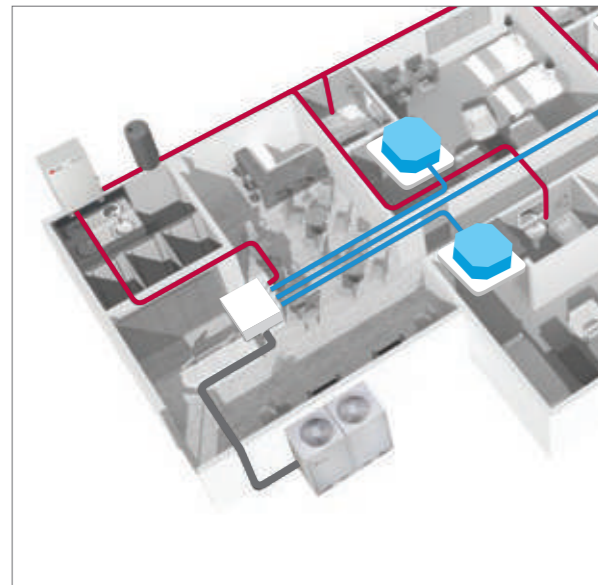

Office Application

The energy recovered from office cooling can be used to generate hot water for use in the offices.

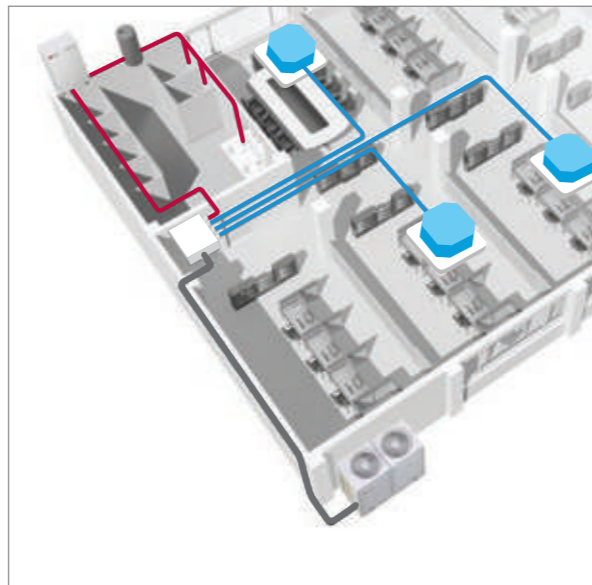

ARNH04GK2A4 / ARNH10GK2A4



MODEL	UNIT	ARNH04GK2A4	ARNH10GK2A4
Cooling Capacity	kW	12.3	28.0
Heating Capacity	kW	13.8	31.5
Power Input Nominal ¹⁾	W	10	10
Exterior Color		Morning Gray	Morning Gray
RAL Code		RAL 7030	RAL 7030
Dimensions (W x H x D)	Body	520 x 631 x 330	520 x 631 x 330
	Shipping	677 x 687 x 418	677 x 687 x 418
Pipe Connections	Liquid Side	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	Ø 15.88 (5/8)	Ø 22.2 (7/8)
	Drain Pipe (Internal Dia.)	A (inch)	25 A (Male PT 1)
Water Pipe Connections	Inlet	A (inch)	25 A (Male PT 1)
	Outlet	A (inch)	25 A (Male PT 1)
Weight	Body	29.2	33.7
Sound Pressure Levels (H / M / L)	dB (A)	26	26
Power Supply	Ø / V / Hz	1, 220 ~ 240, 50 / 60	1, 220 ~ 240, 50 / 60
Communication Cable	mm ² x No.	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

1) Nominal : Performance tested under EN14511

Note :

1. Capacities are based on the following conditions :

- Cooling : Indoor 27°C (80.6°F) DB / 19°C (66.2°F) WB, Outdoor 35°C (95°F) DB / 24°C (75.2°F) WB, Water Inlet 23°C (73.4°F) / Outlet 18°C (64.4°F)
- Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB, Water Inlet 30°C (86°F) / Outlet 35°C (95°F)

2. Piping Length : Interconnected Pipe Length = 7.5 m

3. Difference limit of elevation (outdoor ~ indoor unit) is Zero.

4. MULTI V S 4 HP (ARUN040GSS5, ARUN040LSS0) cannot be connected to Hydro Kit.

5. MULTI V Water S cannot be connected to Hydro Kit.

6. Anti freezing liquid should be added under 10°C (outdoor temp.) during cooling mode.

Accessories

CHASSIS	ARNH04GK2A4	ARNH10GK2A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO	-
EEV Kit	-	-
Multi-tenant Power Module	○	-
Robot Cleaner	-	-
Pre Filter (Washable)	-	-
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with Additional Accessory)	PDRYCB000 (1 point contact), PDRYCB320	-
External Input (1 Point)	○	-
Wi-Fi	PWFMD200	-

※ ○ : Applied, - : Not applied

Option : Refer to model name in table

ARNH04GK3A4 / ARNH08GK3A4



MODEL	UNIT	ARNH04GK3A4	ARNH08GK3A4
Heating Capacity	kW	13.8	25.2
Power Input Nominal ¹⁾	W	2,300	5,000
Exterior Color		Morning Gray	Morning Gray
RAL Code		RAL 7030	RAL 7030
Dimensions (W x H x D)	Body	520 x 1,074 x 330	520 x 1,080 x 330
	Shipping	682 x 1,168 x 423	682 x 1,168 x 423
Pipe Connections	Liquid Side	Ø 9.52 (3/8)	Ø 9.52 (3/8)
	Gas Side	Ø 15.88 (5/8)	Ø 19.05 (3/4)
	Drain Pipe (Internal Dia.)	A (inch)	25 A (Male PT 1)
Water Pipe Connections	Inlet	A (inch)	25 A (Male PT 1)
	Outlet	A (inch)	25 A (Male PT 1)
Weight	Body	86.0	91.0
Sound Pressure Levels (H / M / L)	dB (A)	43	46
Power Supply	Ø / V / Hz	1, 220 ~ 240, 50 / 60	1, 220 ~ 240, 50 / 60
Communication Cable	mm ² x No.	1.0 ~ 1.5 x 2 C	1.0 ~ 1.5 x 2 C

1) Nominal : Performance tested under EN14511

Note :

1. Capacities are based on the following conditions :

- Heating : Indoor 20°C (68°F) DB / 15°C (59°F) WB, Outdoor 7°C (44.6°F) DB / 6°C (42.8°F) WB, Water Inlet 55°C (131°F) / Outlet 65°C (149°F)

2. Piping Length : Interconnected Pipe Length = 7.5 m

3. Difference limit of elevation (outdoor ~ indoor unit) is Zero.

4. MULTI V S 4 HP (ARUN040GSS5, ARUN040LSS0) cannot be connected to Hydro Kit.

5. MULTI V Water S cannot be connected to Hydro Kit.

Accessories

CHASSIS	ARNH04GK3A4	ARNH08GK3A4
Drain Pump	-	-
Cassette Cover	-	-
Refrigerant Leakage Detector	PRLDNVSO	-
EEV Kit	-	-
Multi-tenant Power Module	○	-
Robot Cleaner	-	-
Pre Filter (Washable)	-	-
Ion Generator	-	-
CO ₂ Sensor	-	-
Ventilation Kit	-	-
IR Receiver	-	-
Zone Controller	-	-
Dry Contact (with Additional Accessory)	PDRYCB000 (1 point contact), PDRYCB320	-
External Input (1 Point)	○	-
Wi-Fi	PWFMD200	-

※ ○ : Applied, - : Not applied

Option : Refer to model name in table

Controller		Premium	Standard III	Standard II	Simple	Simple for Hotel	Wireless	Dry Contact					
		PREMTA000 PREMTA000A PREMTA000B	PREMTB11	PREMTB101	PREMTB01	PREMTB001	PQRCVCLQ	PQRCVCLQW	PQRCHCAQ	PQRCHCAQW	PWLSSB21H (H/P)	Simple Dry Contact PDRYCB000	2 points Dry Contact PDRYCB400
4 Way	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
	ARNU-B4	○	○	○	○	○	○	○	○	○	○	○	○
Ceiling Mounted Cassette	ARNU-B4	○	○	○	○	○	○	○	○	○	○	○	○
	ARNU-C4	○	○	○	○	○	○	○	○	○	○	○	○
2 Way / 1 Way	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
Round CST	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
Ceiling Concealed Duct	ARNU-A4	○	○	○	○	○	△	○	○	○	○	○	○
	ARNU-G4	○	○	○	○	○	△	○	○	○	○	○	○
High / Mid Statics	ARNU-A4	○	○	○	○	○	△	○	○	○	○	○	○
Low Statics	ARNU-Z4	○	○	○	○	○	△	○	○	○	○	○	○
FAU (Fresh Air intake)	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
Convertible & Ceiling Suspended	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
Console	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
	ARNU-U4	○	○	○	○	○	○	○	○	○	○	○	○
Floor Standing	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
Floor Standing (PAC)	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
Wall Mounted	ARNU-A4	○	○	○	○	○	○	○	○	○	○	○	○
ARNU-C4	○	○	○	○	○	○	○	○	○	○	○	○	○
ARNU-N4	○	○	○	○	○	○	○	○	○	○	○	○	○
HYDRO KIT ¹⁾	ARNH-A4	-	-	-	-	-	-	○	-	○	-	-	-
Ventilation	Energy Recovery Ventilator	○	○	○	-	-	-	○	-	-	-	○	-
	Energy Recovery Ventilator with DX coil	○	○	○	-	-	-	○	-	-	-	○	-
AHU Communication Kit	○	○	○	-	-	△	-	-	-	-	-	-	-

※ ○ : Compatible, △ : Need wired remote controller / IR receiver, - : Not compatible
1) It has a separate remote controller

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Modem
	Premium	Standard III	Standard II	Simple	Simple (Hotel)		
Model Name	PREMTA000 PREMTA000A PREMTA000B	PREMTB101 PREMTB11	PREMTB001 PREMTB01	PQRCVCLQ PQRCVCLQW	PQRCHCAQ PQRCHCAQW	PWLSSB21H (H/P)	PWFMD200
Basic	On / Off	○	○	○	○	○	○
	Fan Speed Control	○	○	○	○	○	○
	Temperature Setting	○	○	○	○	○	○
	Mode Change	○	○	○	○	-	○
	Auto Swing	○	○	○	○	○	○
	Vane Control (Louver Angle)	○	○	○	○	○	○
	E.S.P (External Static Pressure)	○	○	○	○	○	-
	Electric Failure Compensation	○	○	○	○	○	-
	Indoor Temperature Display	○	○	○	○	○	○
	ALL Button Lock (Child Lock)	○	○	○	○	○	-
Advanced	Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off Weekly
	Additional Mode Setting ¹⁾	○	○	○	-	-	-
	Time Display	○	○	○	-	-	○
	Humid. Display	○	○	-	-	-	-
	Advanced Lock (Mode, Set Point, Set Point Range, On / Off Lock)	Advanced Lock	Advanced Lock	-	-	-	-
	Filter Sign	○	○	○	-	-	-
	Energy Management ²⁾	○	○	○	-	-	-
	Dual Set Point	○	○	-	-	-	-
	Human Detection	-	○	-	-	-	-
	Temp, Humidity Compensation	○	○	-	-	-	-
ETC	Wi-Fi AP Mode Setting	○	○	○	○	○	-
	Operation Status LED	○	○	○	○	○	-
	Wireless Remote Controller Receiver	○ ³⁾	-	○ ³⁾	○ ³⁾	○ ³⁾	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono
	Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 26
Black Control for Screen Saver	○	○	-	-	-	-	-

※ ○ : Applied, - : Not Applied
1) It might not be indicated or operated at the partial product
2) Centralized control (PACEZA000 / PACS5A000 / PACP5A000 / PLNWK000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function
3) For ceiling type duct
Note
- Indoor unit should have functions requested by the controller
- If you need more detail, please refer to the manual of product. (<http://partner.lge.com>: Home > Doc.Library > Manual)

NO.	NEW FUNCTION NAME (4 TH GENERATION INDOOR)	FUNCTION DESCRIPTION	REQUIRED CONTROLLER		REMARKS
			WIRED REMOTE CONTROLLER	CENTRALIZED CONTROLLER	
1	Energy Monitoring (Accumulated Electric Energy Check)	Monitoring accumulated power consumption by Wired Remote Controller	○	○	* Necessary to install the PDI (Power Distribution Indicator) and central controller * Combined with MULTI V Water S outdoor unit, this function is not available.
		Monitoring accumulated power consumption by Central Control Device / PDI	-	○	* Necessary to install the PDI (Power Distribution Indicator) * To make a report, central controller must be installed
2	2 Set Point	1) 2 set point control by Indoor and central controller 2) Synchronization function with remote control (Synchronization Setting and Monitoring)	○	○	* Wired remote controller and central controller must be installed * Combined with MULTI V Water S outdoor unit, this function is not available.
3	Occupied / Unoccupied Scheduling Function (Sub Func. Enable)	1) Synchronization according to occupied / unoccupied by indoor and central control 2) Synchronization icon with remote controller (synchronization monitoring)	○	○	* Centralized control is able to when you combine only 4 th generation indoor units (Use together with 2 nd generation and 4 th generation indoors, only wired remote controller is able to set this function as existing way) * Wired remote controller or central controller must be installed (Function can be activated using just one control device.) * Combined with MULTI V Water S outdoor unit, this function is not available.
4	Group Control	Group control can use additional function	○	○	* Check more details in PDB (Product Data Book) * Central controller can create and control group.
5	Test Run (Heating)	Test run mode can be operated in cooling mode and heating mode for easy service	○	-	
6	Model Information Monitoring	Product Type / Indoor Type / Indoor capacity information can be monitored by remote controller	○	-	
7	Indoor unit address checking	Wired remote controller can check indoor unit address information	○	-	
8	Refrigerant Leakage Detection	Function error sign display when refrigerant leakage occurred	○	○	* Central controller has been installed, CH230 error code can be recognized (Old / New Same) * Without Central Controller, it is able to recognize with wired remote controller (CH230) * Combined with MULTI V Water S outdoor unit, this function is not available. * Accessory PRLDNVS0 must be separately ordered
9	Thermo On / Off Range Setting (Cooling)	User can set cooling thermo on / off range with wired remote controller for prevention overcooling	○	-	* Thermo On / Off temperature setting (3 step)
10	Thermo On / Off Range Setting (Heating)	User can set heating thermo on / off range with wired remote controller for prevention overheating. (4 Step)	○	-	* Thermo On / Off temperature setting (4 step)
11	Static Pressure 11 Step Control (Only for Ceiling Concealed Duct Type)	Depends on the installation environment, 4 th generation Ceiling Concealed Duct can control the static pressure by 11 steps for providing comfortable environment	○	-	* Only applied in Ceiling Concealed Duct
12	1 point External Input (On / Off Control)	Indoor unit can be controlled by external devices without purchasing dry contact as an accessory (All 4 th generation indoors)	○	-	* Simple On / Off control by Dry Contact at Indoor [Example of Contact port by product type] * 2 Way Cassette : CN-CC Port (Wired remote controller installation function mode 41 is required) * 1 Way / 4 Way Cassette / Ceiling Concealed Duct / Wall Mounted Unit / Console / FAU / Floor Standing (with case / without case) : CN-EXT Port
13	Filter Sign (Remaining Time)	The alarm activates when the filter needs to be cleaned, and the time remaining for cleaning is displayed on the screen. After the power failure compensation, stand by at OFF mode Restore the operation for the status before the power off	○	○	* The alarm activates on the central controller, but the remaining time is not displayed.
14	Auto Restart Function Disable / Enable	After the power failure compensation, stand by at OFF mode Restore the operation for the status before the power off	○	-	
15	Indoor Humidity Display	Monitoring indoor humidity Wired Remote Controller	○	○	* Available only with MULTI V i
16	Comfort Cooling Setting	set the outdoor unit comfort cooling operation value	○	○	* Available only with MULTI V i
17	Smart Load Control Setting	Change the outdoor unit's Smart Load Control stage value.	○	○	* Available only with MULTI V i
18	ODU Refrigerant Noise Reduction Setting	Set the outdoor unit's refrigerant noise reduction function	○	○	* Available only with MULTI V i
19	Low Noise Mode Time Setting	Set the start and end time of the outdoor unit's low noise mode operation	○	○	* Available only with MULTI V i

Note : 1) No.1, 2, 3, 8 : Functions are available to use together with 4th generation Indoor units only. If used together 2nd generation indoor unit and 4th generation indoor unit functions will not be activate. Combined with MULTI V Water S outdoor unit this function is not available
2) No. 4, 5, 6, 7, 9, 10, 11, 12, 13, 14 : If used together 2nd generation indoor unit and 4th generation indoor unit these functions will be activate only in 4th generation indoor
3) 2nd generation indoor unit : Ceiling & Floor Convertible Unit, Ceiling Suspended Unit, HYDRO KIT (Low Temp. / High Temp.), ERV DX (with Humidifier, without Humidifier), AHU Communication Kit

PREMIUM (PREMTA000A PREMTA000B)	WIRED REMOTE CONTROLLER				CENTRALIZED CONTROLLER				
	STANDARD III (PREMTB101) (PREMTB11)	STANDARD II (PREMTB001) (PREMTB001)	SIMPLE		AC EZ (PQCSZ250S0)	AC EZ TOUCH (PACEZA000)	AC SMART 5 (PACSSA000)	ACP 5 (PACP5A000)	AC MANAGER 5 (PACMSA000)
			SIMPLE FOR HOTEL (PQRCHCA0Q / QW)	SIMPLE (PQRCVCL0Q / QW)					
○	○	○	-	-	-	○	○	○	○
-	-	-	-	-	-	○	○	○	○
○	○	-	-	-	-	○	○	○	○
○	○	-	-	-	-	○	○	○	○
○	○	○	-	-	-	-	○	○	○
○	○	○	-	-	-	-	-	-	-
○	○	○	-	-	-	-	○	○	-
○ (4 step)	○ (4 step)	○ (3 step)	○ (3 step)	○ (3 step)	-	-	-	-	-
○	○	○	○	○	-	-	-	-	-
○	○	○	-	-	-	-	-	-	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	-	○	○	-
○	○	-	-	-	-	○	○	○	-
○	○	-	-	-	-	○	○	○	-

※ ○ : Applied, - : Not applied

170 ~ 235

CONTROL SOLUTIONS

INDIVIDUAL CONTROL

CENTRALIZED CONTROL

INTEGRATION DEVICE

PROPOSAL CASE



The perfect choice for innovative building management

LG BECON HVAC SOLUTION

Innovative building management solution is in your hands.

A diverse range of effective Control Solutions that satisfy specific needs for each building and its user scene.



ENERGY SAVING



SMART MANAGEMENT



EASY EXPANDABILITY

SMART MANAGEMENT



Standard III Remote Controller



Premium Remote Controller



Wi-Fi Modem (with ThinQ)

EASY EXPANDABILITY



Modbus Gateway



ACU IO Module



Dry Contact



ACP 5



ACS IO Module

ENERGY SAVING



PDI



AC Smart 5




AC Manager 5



AC Ez Touch

CONTROL SYSTEM ARCHITECTURE

LG BECON HVAC SOLUTION offers a diverse range of effective control solutions that satisfy specific needs of each building and its user scene. These control systems are equipped with user-friendly interface, flexible interlocking environment, energy management and smart individual controller for optimized controlling conditions and smart building management.

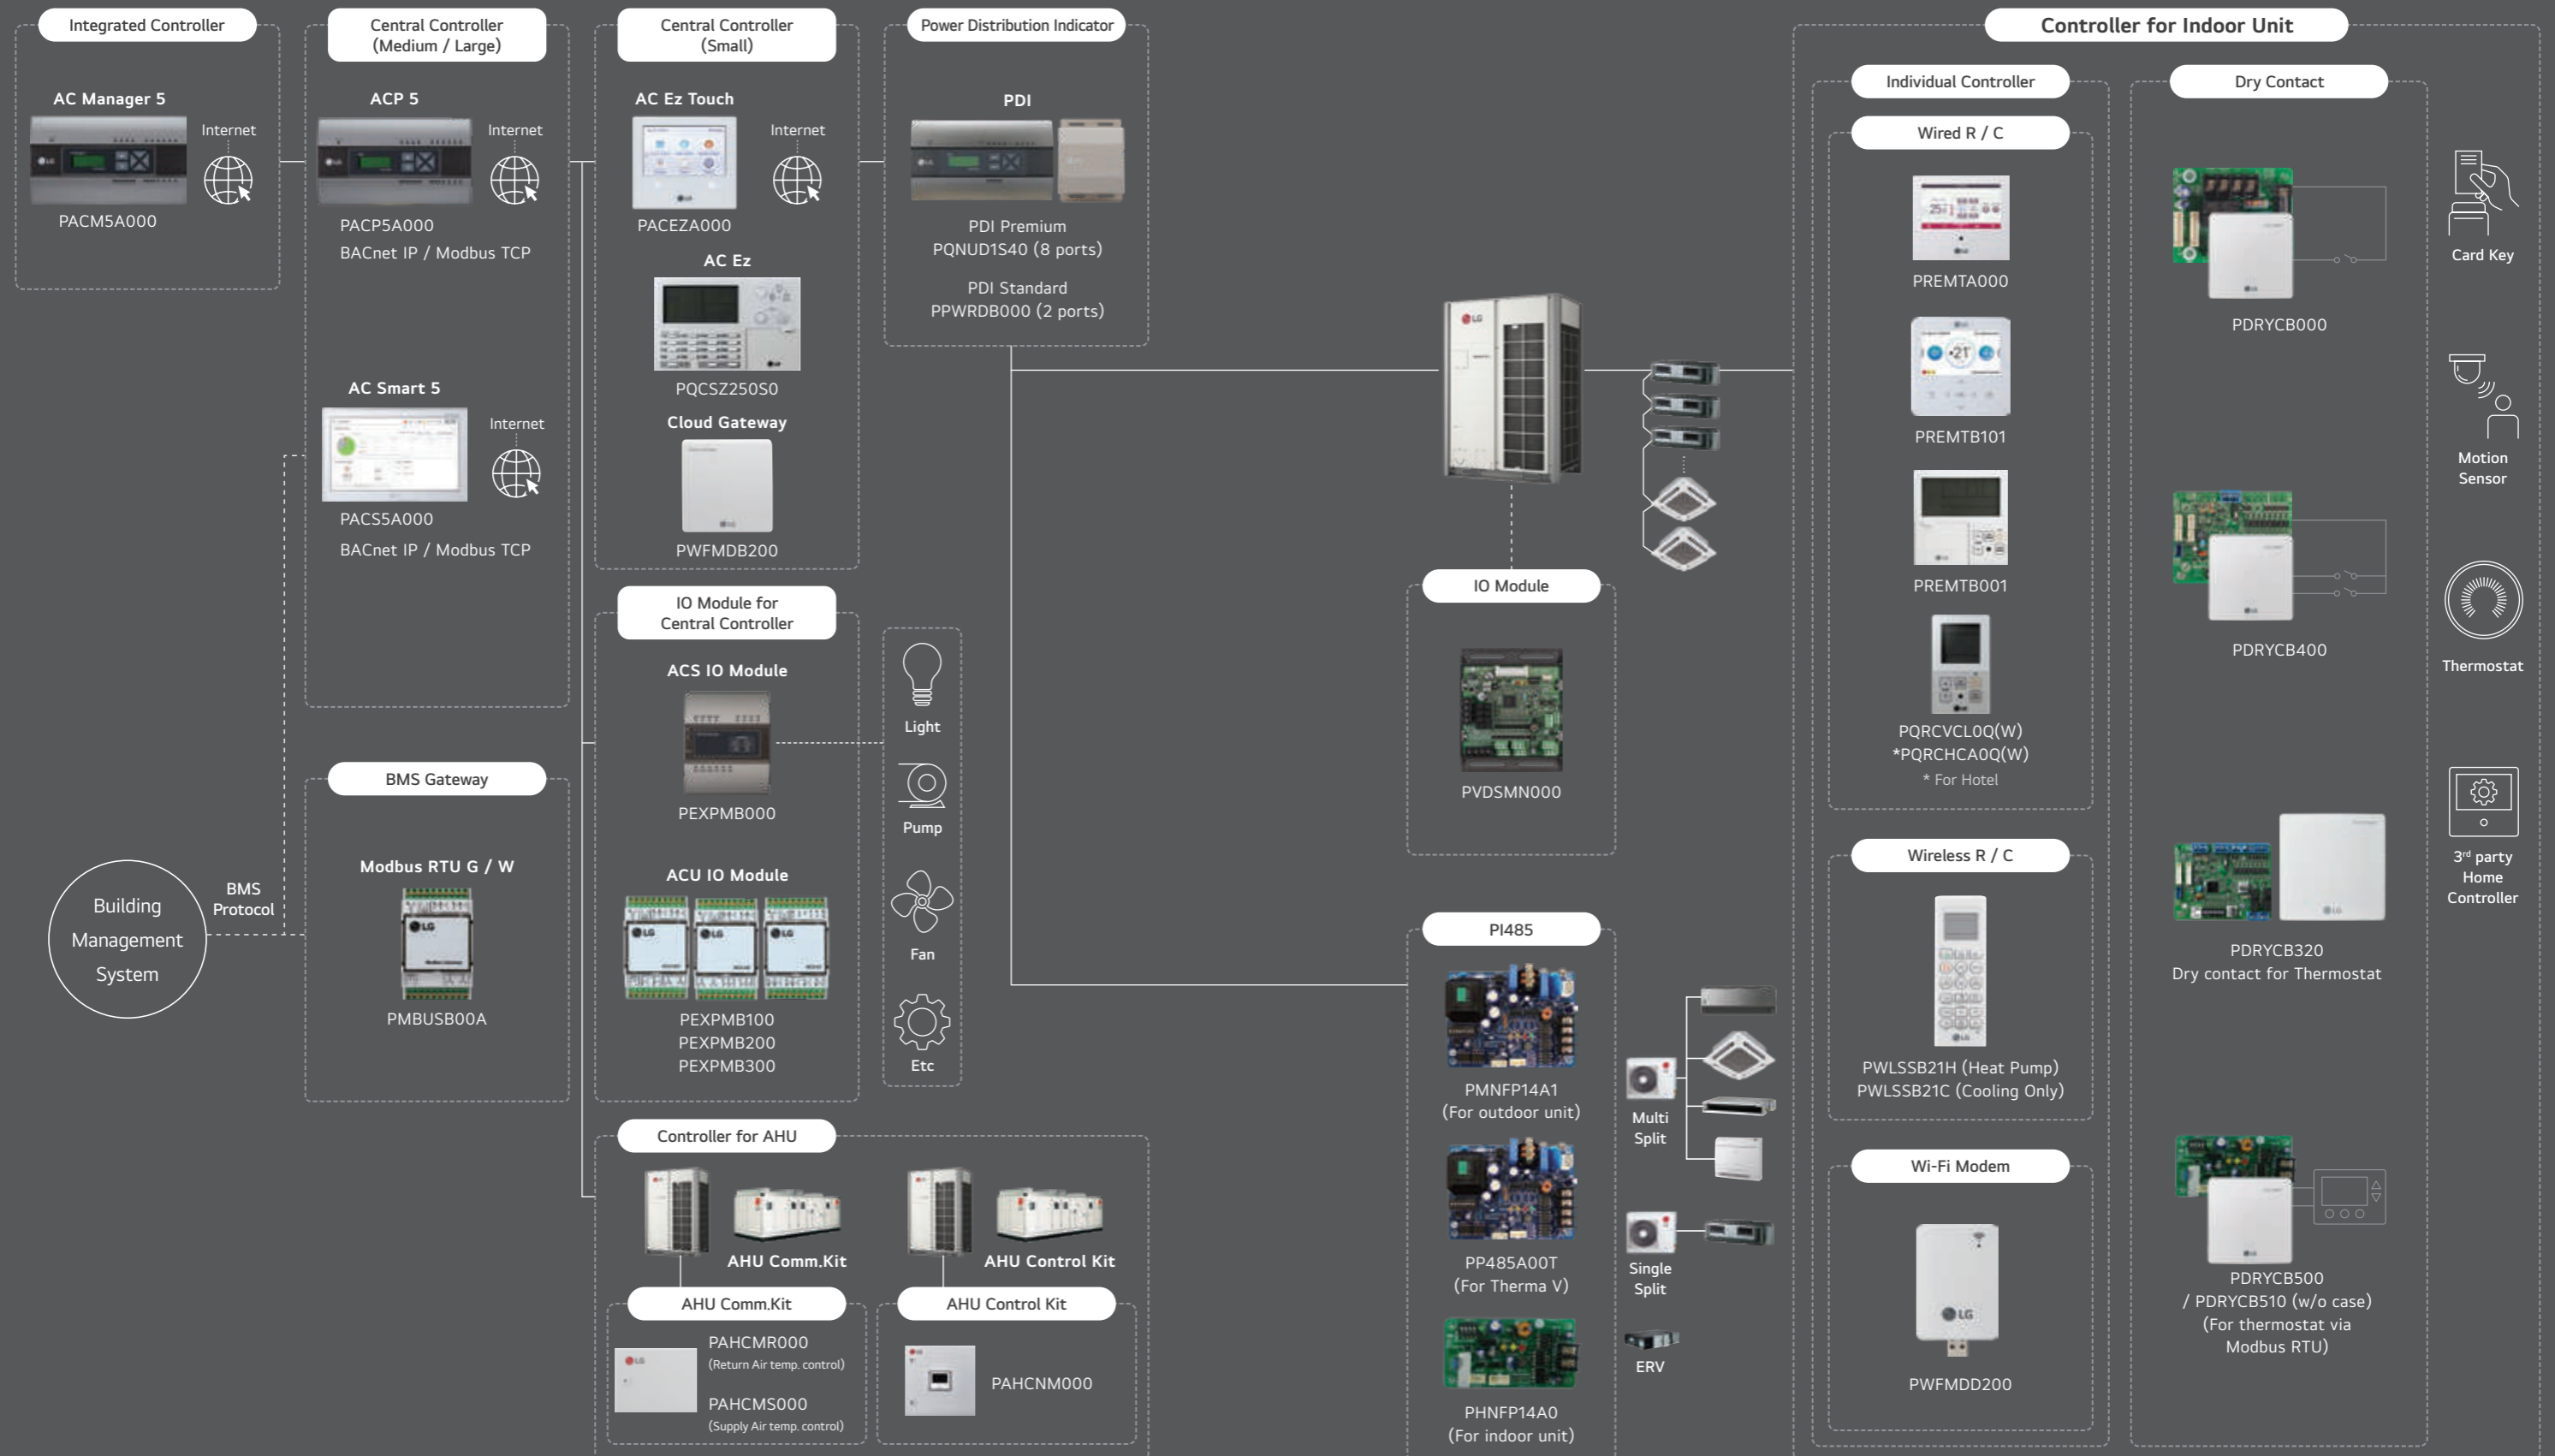



Feature Functions

Controller Name	Wired Remote Controller					Wireless Remote Controller	Wi-Fi Modem
	Premium	Standard III	Standard II	Simple	Simple (Hotel)		
Model Name							
	PREMTA000 PREMTA000A PREMTA000B	PREMTB101 PREMTBB11	PREMTB001 PREMTBB01	PQRCVCL00 PQRCVCL0QW	PQRCHCA00 PQRCHCA0QW	PWLSSB21H (H/P) PWLSSB21C (C/O)	PWFMD200
Basic	On / Off	○	○	○	○	○	○
	Fan Speed Control	○	○	○	○	○	○
	Temperature Setting	○	○	○	○	○	○
	Mode	○	○	○	○	-	○
	Auto Swing	○	○	○	○	○	○
	Vane Control (Louver Angle)	○	○	○	○	○	○
	E.S.P (External Static Pressure)	○	○	○	○	○	-
	Electric Failure Compensation	○	○	○	○	○	-
	Indoor Temperature Display	○	○	○	○	○	○
	All Button Lock (Child Lock)	○	○	○	○	○	-
Schedule / Timer	Weekly - Yearly	Weekly - Yearly	Weekly	-	-	Sleep / On / Off	Weekly
Wi-Fi AP Mode Setting	○	○	○	○	○	○	-
Advanced	Additional Mode Setting ¹⁾	○	○	○	-	-	-
	Time Display	○	○	○	-	-	○
	Humidity Display	○	○	-	-	-	-
	Advanced Lock (Mode, Set Point, Set Point Range, On / Off Lock)	Advanced Lock	Advanced Lock	-	-	-	-
	Filter Sign	○	○	○	-	-	-
	Energy Management ²⁾	○	○	○	-	-	-
	Dual Set Point	○	○	-	-	-	-
	Human Detection	-	○	-	-	-	-
	Temp. Humidity Compensation	○	○	-	-	-	-
	Air Purify Control	-	○	-	-	-	○
ETC	Air Quality Level	-	○	-	-	-	○
	Dual Vane (6 Airflows Mode)	-	○	-	-	-	○
	Operation Status LED	○	○	○	○	○	-
	Wireless Remote Controller Receiver	○ ³⁾	-	○ ³⁾	○ ³⁾	○ ³⁾	-
	Display	5 inch Color	4.3 inch Color	4.3 inch mono	2.6 inch mono	2.6 inch mono	2 inch mono
Size (W x H x D, mm)	137 x 121 x 16.5	120 x 120 x 16	120 x 121 x 16	70 x 121 x 16	70 x 121 x 16	51 x 153 x 26	48 x 68 x 14
Black Control for Screen Saver	○	○	-	-	-	-	

※ ○ : Applied, - : Not Applied
 1) It might not be indicated or operated at the partial product.
 2) Centralized control (PACEZA000 / PACS5A000 / PACP5A000 / PLNWKB000) and PDI (PQNUD1S40 / PPWRDB000) should be installed for this function.
 3) For ceiling type duct
 Note :
 1. Indoor unit should have functions requested by the controller.
 2. If you need more detail, please refer to the manual of product. (<http://partner.lge.com> : Home > Doc.Library > Manual)



Design

- 4.3 inch color LCD / Intuitive GUI
- Seamless design / Touch button
- Humidity sensor embedded

Comfort & Air Purification

- CO₂ level monitoring (For ERV)
- Air quality level monitoring
- Air purify control

Energy Contents



- Power consumption monitoring
- Operation time monitoring
- Temperature setback
- Time limit control

Advanced Functions

- Comfort cooling setting
- Smart Load Control setting
- Outdoor unit low noise setting
- Defrost noise setting
- ODU capacity control
- Schedule functions



Touch Button

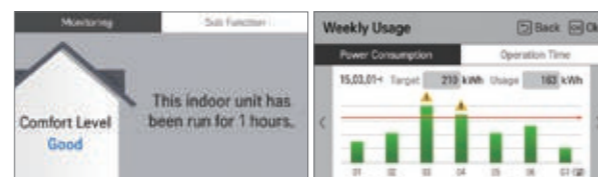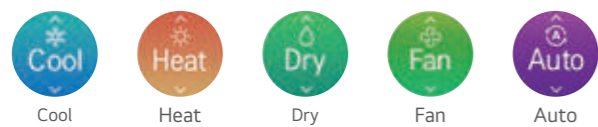

Comfort Level

Energy Contents



Error History

Standard III Wired Remote Controller

PREMTB101 (White) / PREMTBB11 (Black)


4.3 inch colored screen with modern design.



New Modern Design



Comfort & Reliability (Air Purify)



Schedule



Convenience



Energy Management



Interlocking

MODEL NAME	PREMTB101 / PREMTBB11
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification / Comfort Cooling
Auto Swing	○
Vane Control (Louver direction)	○
E.S.P (External Static Pressure) ²⁾	○
Reservation	Simple / Sleep / On & Off timer / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Lock	All / On & Off / Mode / Set Temperature Range
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Popup / Initialization Usage Data
Operation Status LED	○
Air Purify Control ⁴⁾	○
Air Quality Level ⁴⁾	○
Indoor Temperature Display	○
Indoor Humidity Display	○
Human Detection	○
Display	4.3 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	120 x 120 x 16
Black Light for Screen Saver	○
Home Leave	2 Set Points Control

※ ○ : Applied, - : Not Applied

1) The function is available in some product. (Refer to the product data Book).

2) This function is available for duct type.

3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.

4) This function is available for indoor units that provide corresponding function.

Note :

1. Indoor unit needs to have functions requested by the controller.

2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly.

Standard III Wired Remote Controller

Air Quality Level Display

· PM10 / PM2.5 / PM1.0 · Status / Monitoring



CLASSIFICATION	GOOD	MODERATE	UNHEALTHY	POOR
* PM10 (µg / m3)	0 ~ 54	55 ~ 154	155 ~ 254	255 ~
* PM2.5 (µg / m3)	0 ~ 12	13 ~ 35	36 ~ 55	56 ~
* PM1.0 (µg / m3)	0 ~ 12	13 ~ 35	36 ~ 55	56 ~

Note : Display color may change depending on the region / country.
 This function is available for indoor units that provide corresponding function.
 * PM (Particulate matter)
 - PM10 : Coarse Particulate matter / PM2.5 : Fine Particulate matter / PM1.0 : Ultra Fine Particulate matter
 - PM designated as a carcinogen as like an asbestos, widely known as carcinogen.
 If the dust diameter is under 10 micrometers, it is PM10. And under 2.5 micrometers, it's PM2.5.

Environment Monitor Display

Temperature / Humidity / Comfort level / CO₂ concentration



Dual Set Point


Auto changeover for convenience

- Indoor unit will keep the indoor temperature within the range of dual set point by automatically switching the unit operation.

Setback for energy savings and comfort

- The room temperature will remain between two set points, leaving the room cooling even after the mode is changed to 'occupied'.

* This function is for Heat Recovery system or Single heat pump. Otherwise it is not guaranteed.

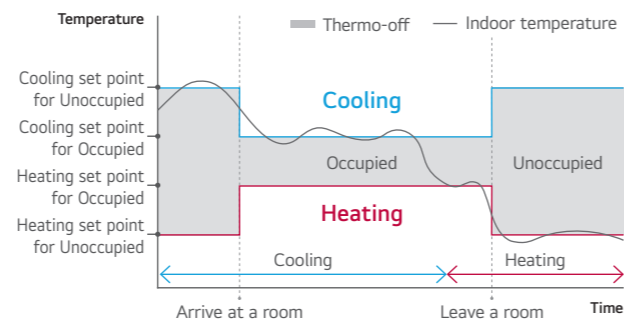


Energy Savings

Energy Management

- Energy Monitoring & Alarm
 Real-time and day / week / month / year energy usage monitoring is possible. In addition, it can set target for energy usage and operation time, and alarm will be displayed when exceeded.

* PDI (PQNU1S40 / PPWRDB00) is required.

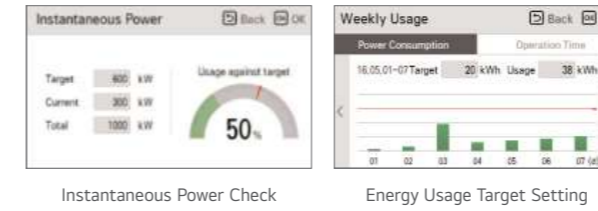

Time Limit Control


- Monitoring the unit's continuous running time, until unit turn off automatically to prevent wasting energy.



Schedule Function


Simple Schedule Status

Standard III remote controller provides clock type daily schedule.

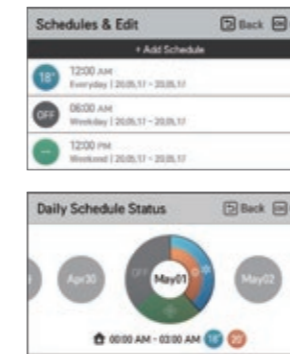

Exception Day Settings


Possible to set up exceptional date on regular schedule.

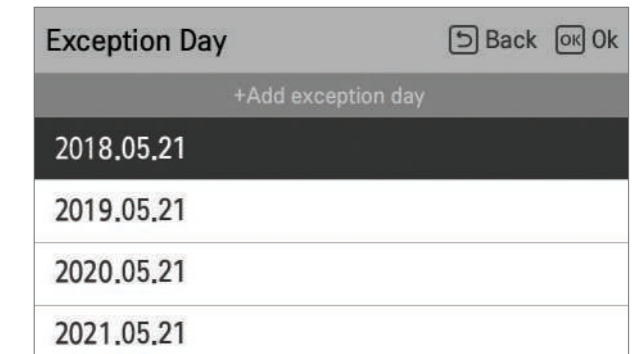

External Device On / Off


External Equipment Control

User can control the external equipment through additional contact signal output.

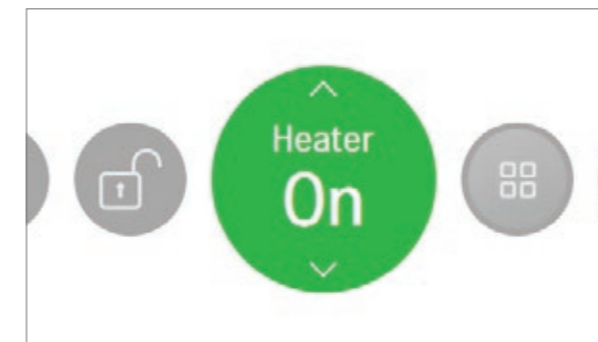

Customized Interlocking Control


User can customized the control pattern. For example, tuning the temperature at a certain temperature for different conditions.

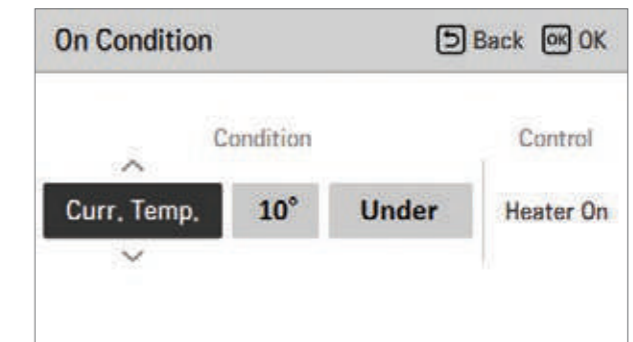

Premium Wired Remote Controller



Full Touch Screen

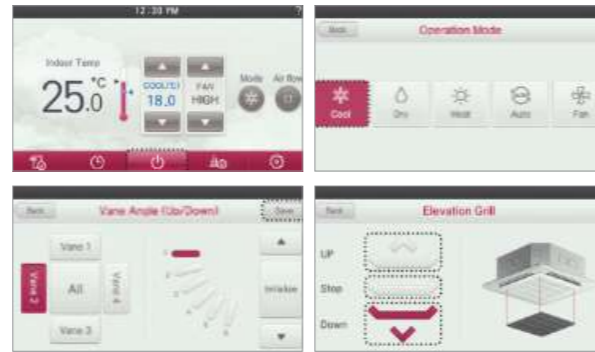

PREMTA000 ¹⁾ / PREMTA000A ²⁾ / PREMTA000B ³⁾

5 inch full touch screen with a premium design.



* Supported languages list
 1) English / Portuguese / Spanish / French
 2) English / Italian / Russian / Chinese
 3) English / German / Polish / Czech

MODEL NAME	PREMTA000 / PREMTA000A / PREMTA000B
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting ¹⁾	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Louver Direction)	○
E.S.P (External Static Pressure) ²⁾	○
Reservation	Simple / Sleep / On / Off / Weekly / Yearly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Energy Management	Check Energy Usage ³⁾ / Check Operation Time / Target Setting (Energy, Operation Time) / Time Limit Operation / Alarm Pop-up / Initialization Usage Data
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ⁴⁾
Display	5 inch TFT color LCD (480 x 272)
Size (W x H x D, mm)	137 x 121 x 16.5
Black Light for Screen Saver	○
Home Leave	2 Set Points Control

※ ○ : Applied, - : Not Applied
 1) It might not be indicated or operated at the partial product.
 2) This function is available for duct type.
 3) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.
 4) For ceiling type ducted unit
 Note : 1. Indoor unit needs to have functions requested by the controller
 2. 2 set points control works normally with MULTI V Heat Recovery and Single Split Heat Pump. But in case of MULTI V Heat Pump, It may not work properly

Easy Energy Management

- Check the operation hour or electricity usage
- Comparison of usage by year
- Set the target usage and time



Easy Scheduling


- Daily, Weekly, Yearly schedule function
- Schedule pattern setting
- Schedule copy



Dual Set Point


- Auto changeover switching the operation mode automatically
- Setback (Leave Home) Changing status by occupied / unoccupied

* This function is only for Heat Recovery system and Single heat pump.

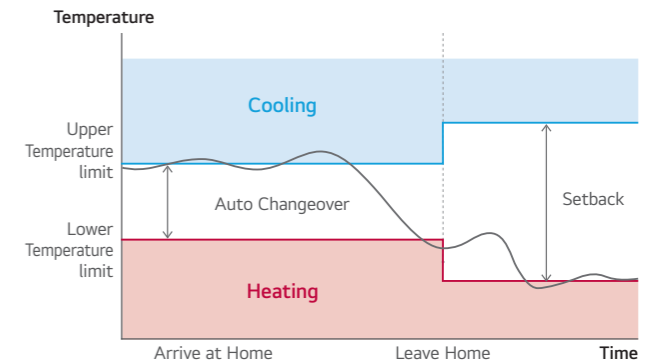

Group Control

- Max. 16 Indoor units by one remote controller

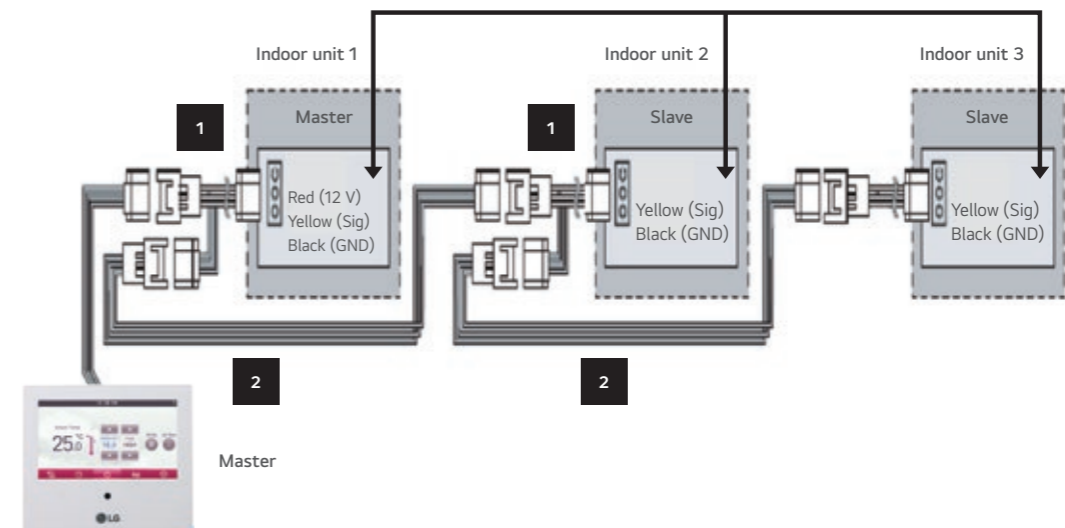

Standard II Wired Remote Controller

PREMTB001 / PREMTBB01

Providing easy control of one or a group of indoor units with various functions.



Features & Benefits

- Wired remote controller that can implement various functions such as scheduling or filter alert.

MODEL NAME	PREMTB001 / PREMTBB01
On / Off	○
Fan Speed Control	○
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Energy-Saving Cooling / Robot Cleaning / Heater / Humidification
Auto Swing	○
Vane Control (Louver Direction)	○
E.S.P (External Static Pressure)	○
Reservation	Simple / Sleep / On / Off / Weekly / Holiday
Time Display	○
Electric Failure Compensation	○
Child Lock	○
Filter Sign	○ (Remain time + Alarm)
Operation Status LED	○
Indoor Temperature Display	○
Wireless Remote Controller Receiver	○ ¹⁾
Size (W x H x D, mm)	120 x 121 x 16
Black Light	○
Power Consumption Monitoring	○ ²⁾
Check Model Information	○

※ ○ : Applied, - : Not Applied

1) For ceiling type ducted unit

2) This function requires PDI (PQNUD1S40 / PPWRDB000) to be installed.

Note : Indoor unit needs to have functions requested by the controller.

Simple Wired Remote Controller

PQRCVCL0QW (White) / PQRCVCL0Q (Black) / PQRCHCA0QW (White) / PQRCHCA0Q (Black)

A simple way to control office or hotel systems in a compact design.



Features & Benefits

- Small remote control with minimal functionality.

MODEL NAME	PQRCVCL0QW / PQRCVCL0Q	PQRCHCA0QW / PQRCHCA0Q
On / Off	○	○
Fan Speed Control	○	○
Temperature Setting	○	○
Mode	Cool / Heat / Dry / Fan / Auto	-
Auto Swing	○	○
Vane Control (Louver Direction)	○	○
E.S.P (External Static Pressure)	○	○
Electric Failure Compensation	○	○
Child Lock	○	○
Indoor Temperature Display	○	○
Wireless Remote Controller Receiver	○ ¹⁾	○ ¹⁾
Size (W x H x D, mm)	70 x 121 x 16	70 x 121 x 16
Black Light	○	○

※ ○ : Applied, - : Not Applied

1) For ceiling type ducted unit

Note : Indoor unit needs to have functions requested by the controller.

Wireless Remote Controller

PWLSSB21H (Heat Pump), PWLSSB21C (Cooling Only)

Handy and portable wireless type.



Features & Benefits


- Easy to use while moving.
- Main functions are available.

MODEL NAME	PWLSSB21H (H/P), PWLSSB21C (C/O)
On / Off	○
Fan Speed Control	○ ¹⁾
Temperature Setting	○
Mode	Cool / Heat / Dry / Fan / Auto
Additional Mode Setting	Air Purification / Energy-Saving Cooling / Robot Cleaning / Auto Dry
Auto Swing	○
Vane Control (Louver Direction)	○
Reservation	Sleep / On / Off
Time Display	○
Indoor Temperature Display	○
Sleep Mode Auto	Max. 7 hours
Size (W x H x D, mm)	51 x 153 x 26

※ ○ : Applied, - : Not Applied

1) For some products, you can use "slow" fan speed function.

Wi-Fi Modem

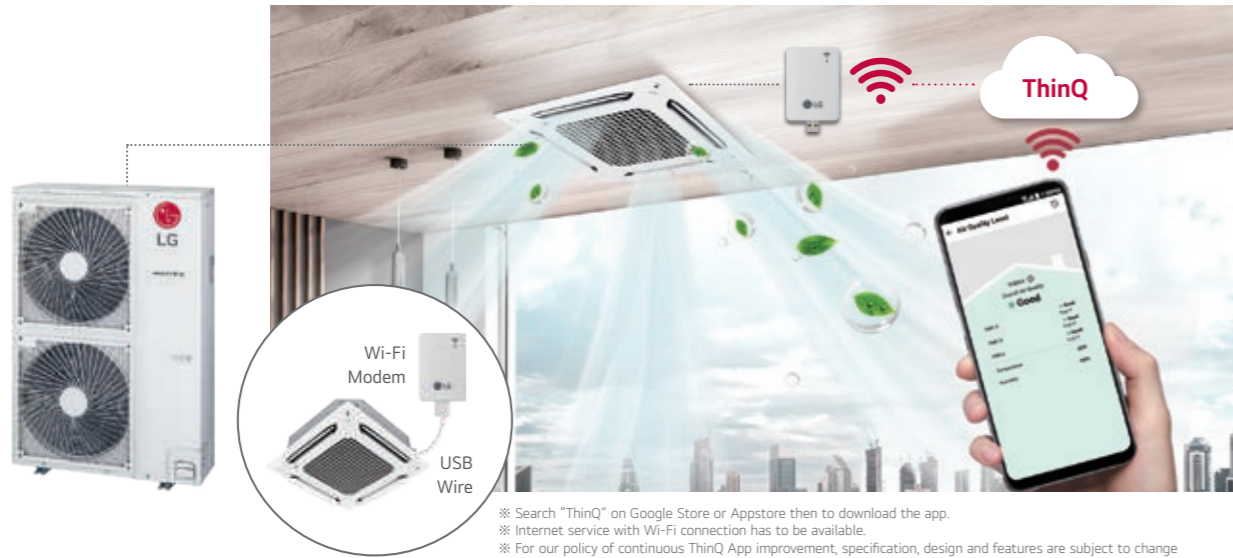

※ Search "ThinQ" on Google Store or Appstore then to download the app.
 ※ Internet service with Wi-Fi connection has to be available.
 ※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.

PWFMDD200

Control conditioners by using smart devices.



Features & Benefits

- User can enjoy access from anywhere with Wi-Fi equipped device through LG's ThinQ mobile app.
- This allows the user to access the unit remotely before or after leaving the vicinity.
- LG's exclusive Home Appliances control app (ThinQ) is available.
- User-friendly functions available.


- On / Off
- Operation Mode
- Current / Set Temperature
- Fan Speed
- Vane Control ¹⁾
- Reservation (Sleep, Weekly On / Off)
- Energy Monitoring ²⁾
- Filter Management
- Error Check
- Air Purify ³⁾

MODEL NAME	PWFMDD200
Size (W x H x D, mm)	48 x 68 x 14
Interfaceable Products	System Air Conditioner ³⁾
Connection Type	Indoor unit 1:1
Communication Frequency	2.4 GHz
Wireless Standards	IEEE 802.11 b / g / n
Mobile Application	LG ThinQ (Android 7.0 ¹⁾ , iOS 14.0 ¹⁾
Optional Extension Cable	PWYREW000 (10 m extension)

1) Vane Control is available on selected models only.
 2) LG Centralized controller and PDI installation is required for this function.
 3) For the compatibility with Indoor unit, please contact regional LG office.

Note :
 1. Functionality may be different according to each IDU model.
 2. User interface of application shall be revised for its design and contents improvement.
 3. Application is optimized for smartphone use, so it may not be well functioning with tablet devices.

Installation Scene

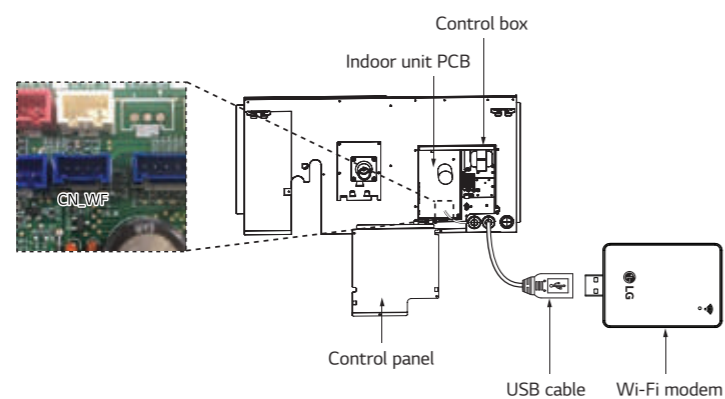


※ The Wi-Fi communication distance and reliability may vary due to the type of Wi-Fi router and the installation environment, Please refer to the manual.

ThinQ Connectivity

Connection (Pairing) Order

- 1 Create LG account on ThinQ (Application) and login.
- 2 Select the installed product and set AP (Access Point) mode by wired / wireless remote controller.
- 3 Select the Wi-Fi network that will be used and insert the passwords.
- 4 Product registration progress is completed.


* 5 GHz networks may not be supported.

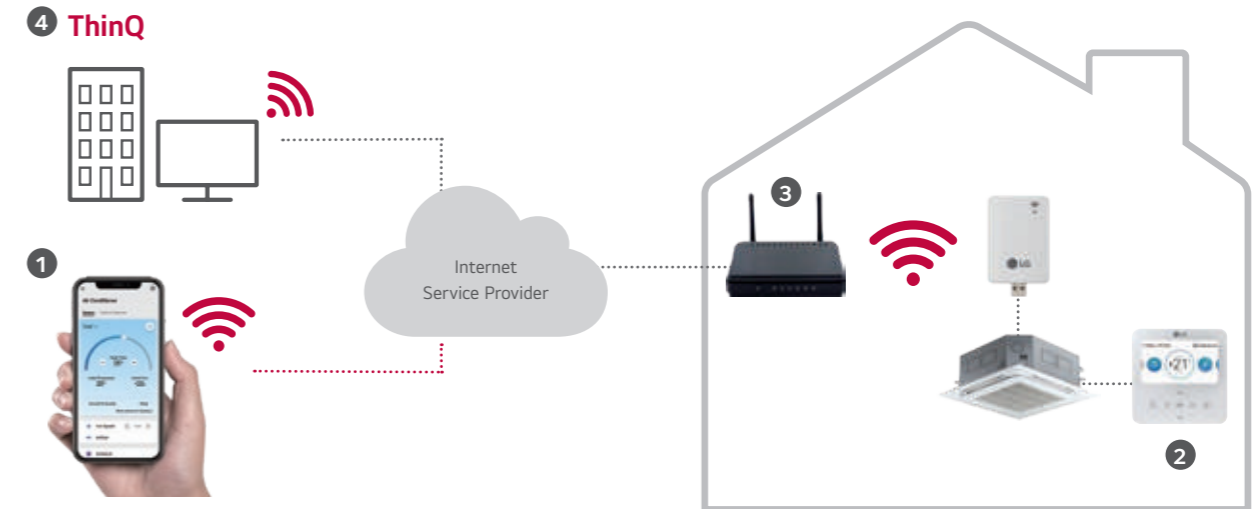


ThinQ Mobile App

Simple operation for various functions

On, Off, Current Temp., Mode, Set Temp.

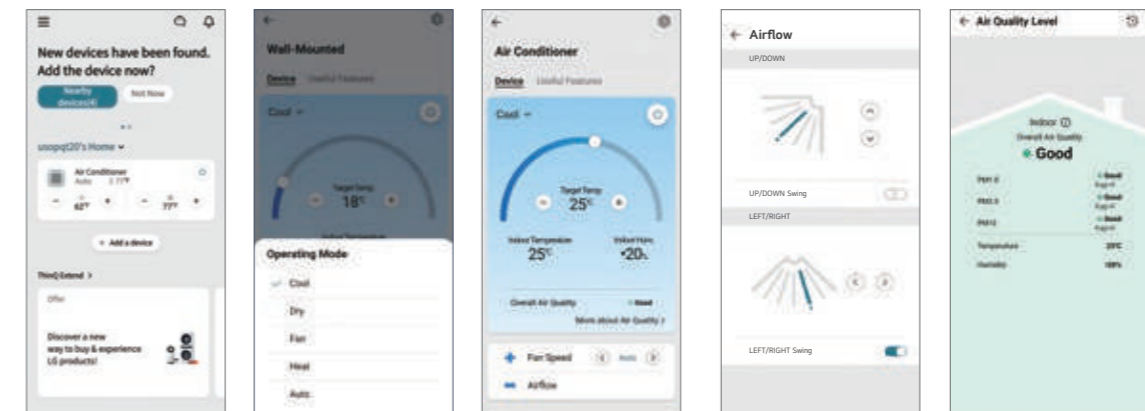



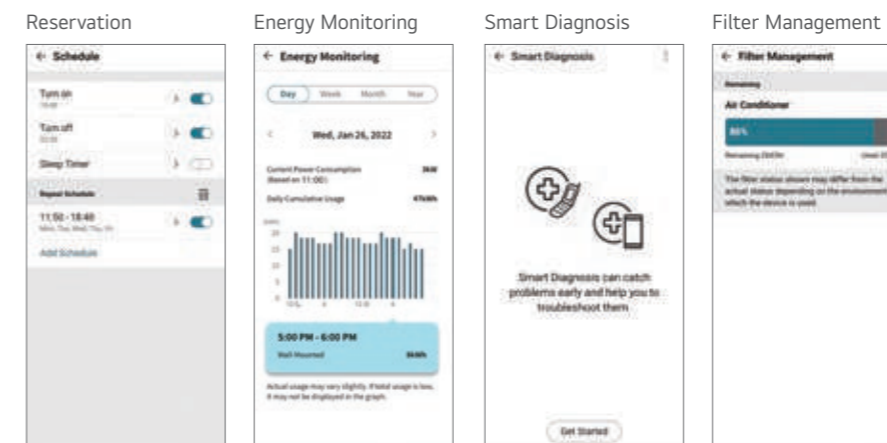



Easy Management



※ For our policy of continuous ThinQ App improvement, specification, design and features are subject to change without prior notice.



Feature Functions

Controller Name		AC Ez	AC Ez Touch	AC Smart 5 ⁶⁾	ACP 5 ⁶⁾	AC Manager 5 ⁷⁾	Cloud Gateway	
Model Name								
		PQCSZ250S0	PACEZA000	PACS5A000	PAC5A000	PACMSA000	PWFMDB200	
Product	DO	-	-	2	4	-	-	
	DI	-	1	2	10	-	-	
	Max. Connectable No.	IDUs	32	64	128	256	8,192	16
		ERV	32	64	128	256	8,192	16
		A / C + ERV	32	64	128	256	8,192	16
		AHU	-	-	16	16	16 x 32	-
Chiller		-	-	5	10	10 x 32	-	
Commercial Air Purifier ¹⁾	-	-	64	128	128 x 32	-		
Compatibility	Air Conditioner	○ ³⁾	○	○	○	○	○	
	Ventilation (ERV / ERV DX)	○ ⁴⁾	○	○	○	○	○	
	Heating	-	○	○	○	○	○ ⁸⁾	
	AHU	-	-	○	○	○	-	
	Chiller	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
	Commercial Air Purifier ¹⁾	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
	ACS IO	-	-	○	○	○	-	
Additional Function	Add Drawing	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
	Group Management	-	○	○ ⁵⁾	○ ⁵⁾	○	-	
	Auto Changer Over	-	○	○ ⁵⁾	○ ⁵⁾	○	-	
	Set Back	-	○	○ ⁵⁾	○ ⁵⁾	○	-	
	Dual Setpoint	-	○	○	○	○	-	
	Change Alarm	-	Filter	Filter	Filter	Filter	-	
	Indoor Unit Lock	○ ²⁾	○	○	○	-	-	
	Cycle Monitoring	-	-	○	○	○	○	
	Air Purify	-	○ ⁵⁾	○ ⁵⁾	○ ⁵⁾	○	-	
	Schedule	○	○	○ ⁵⁾	○ ⁵⁾	○	○ ⁹⁾	
Auto Control	Peak Control	Energy & Priority Control	-	○	○	○	○	
		Outdoor Unit Capacity Control	-	-	○ ⁵⁾	○ ⁵⁾	○	
	Time Limit Control	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
	Interlocking	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
Energy Navigation		-	-	○ ⁵⁾	○ ⁵⁾	○	-	
Energy Report	Power	-	○	○	○	○	○ ⁸⁾	
	Gas	-	-	○	○	○	-	
	Run Time	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
	Save to PC / USB (Excel)	-	-	PC / USB ⁵⁾	PC	PC	-	
Trend Reporting		-	-	○ ⁵⁾	○ ⁵⁾	○	-	
History	Report (Control / Error)	-	Error	○ ⁵⁾	○ ⁵⁾	○	○	
	Send Email	-	-	○ ⁵⁾	○ ⁵⁾	○	-	
	Save to PC / USB (Excel)	-	-	PC / USB	PC	PC	-	
etc	Summer Time	-	○	○ ⁵⁾	○ ⁵⁾	○	-	
	Outdoor Unit Oil-Return Operation	-	-	○ ⁵⁾	○ ⁵⁾	-	-	
	User Authority	-	Password	○ ⁵⁾	○ ⁵⁾	○	-	
	PC Access	-	○	○ ⁵⁾	○ ⁵⁾	○	-	

※ ○ : Applied, - : Not Applied

1) The Commercial Air purifier must additionally install PI485 (PHNFP14A0).

2) Hard Lock

3) Except for some feature (Individual lock, Limit temp., etc.)

4) Except for some feature (User mode, additional function, etc.)

5) This function is not applied for BMS points.


6) Without additional device, ACP 5 and AC Smart 5 provide BACnet IP and Modbus TCP interface for BMS.

7) ACP 5 or AC Smart 5 is required.

8) Only for Therma V

9) It will be released until 1Q in 2023.

AC Ez Touch

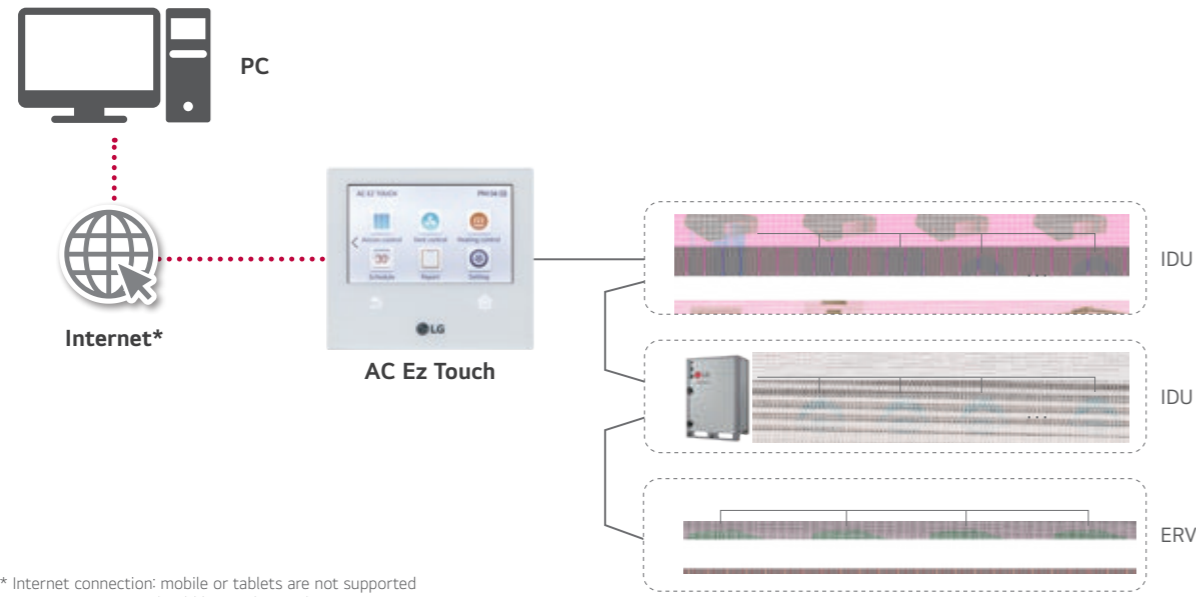

* Internet connection: mobile or tablets are not supported
 * Appropriate PI485 should be used according to PDB.

PACEZA000

Smart management with 5 inch touch screen for small site.



MODEL NAME	PACEZA000
Size (W x H x D, mm)	137 x 121 x 25
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro Kit / THERMA V
Maximum Number of Units	64
Individual / Group Control	On & Off / Mode / Temperature / Fan Speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Error Check	○
Slave Mode (Interlocking with Higher Level Controller)	○
Schedule	Weekly / Monthly / Yearly / Exception day
Remote Access	By client S/W (Neither Android nor IOS are supported)
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation History	Error Record
ODU Low Noise ¹⁾	○
Daylight Saving Time	○
External IO Port	DI 1
IPv6 Support	○
Air Purify Control	○
Air Quality Level	○

※ ○ : Applied, - : Not Applied
 1) It is only available in some products.

PC Access

Users can control each space efficiently through PC access.



* IPv6 supported
 - Open port 80 & 9300
 - Fix public IP is mandatory. Router configuration of NAT is required.


Energy Statistics (with PDI)

Statistics of operational status (Time, Power consumption) are provided to make intelligent system operation decisions.


Name	Usage(kWh)	Accumulated(kWh)
Group1	110	3021
Group2	150	6186
Group3	130	4267
Group4	120	7614

Energy Mode

Energy mode function available.
 (It is available only for operating indoor unit)

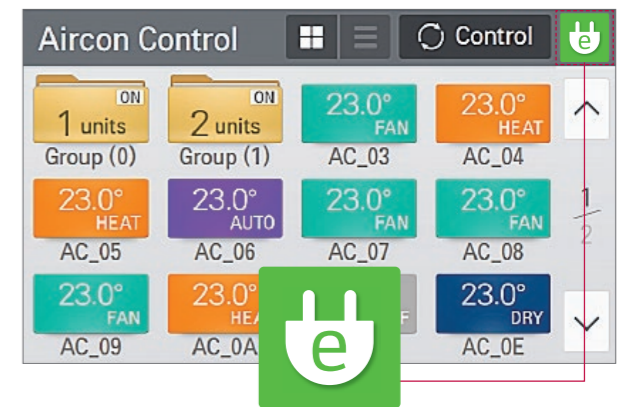


Air Purify Control & Monitoring

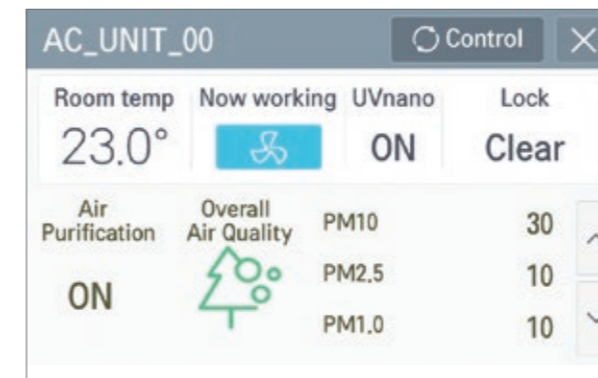

AC Ez Touch


Alarm Indicator

Users can respond immediately according to alarm indicator.

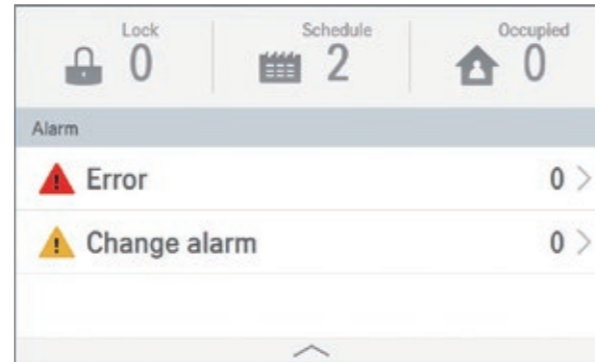


Schedule

Schedule control allows user to set the events in advance to maximize system performance.

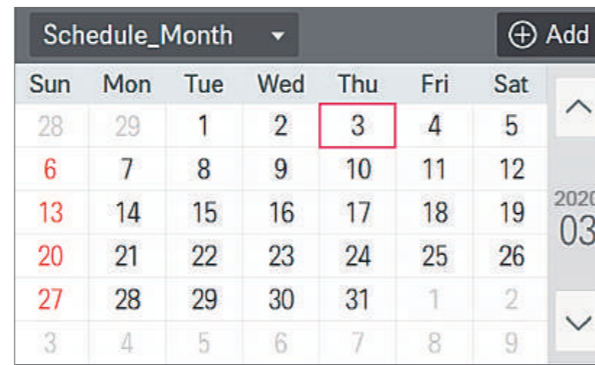


Group / Individual Control

User can control each indoor unit individually or by group.

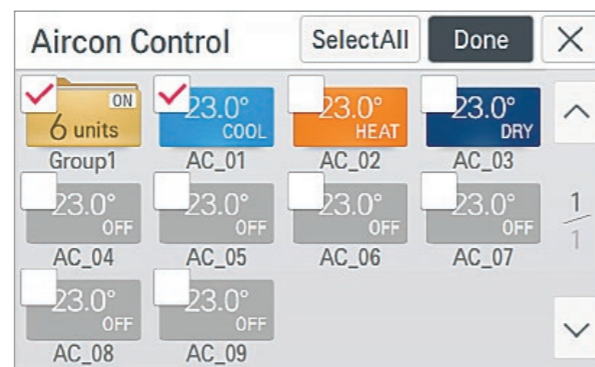

AC Ez

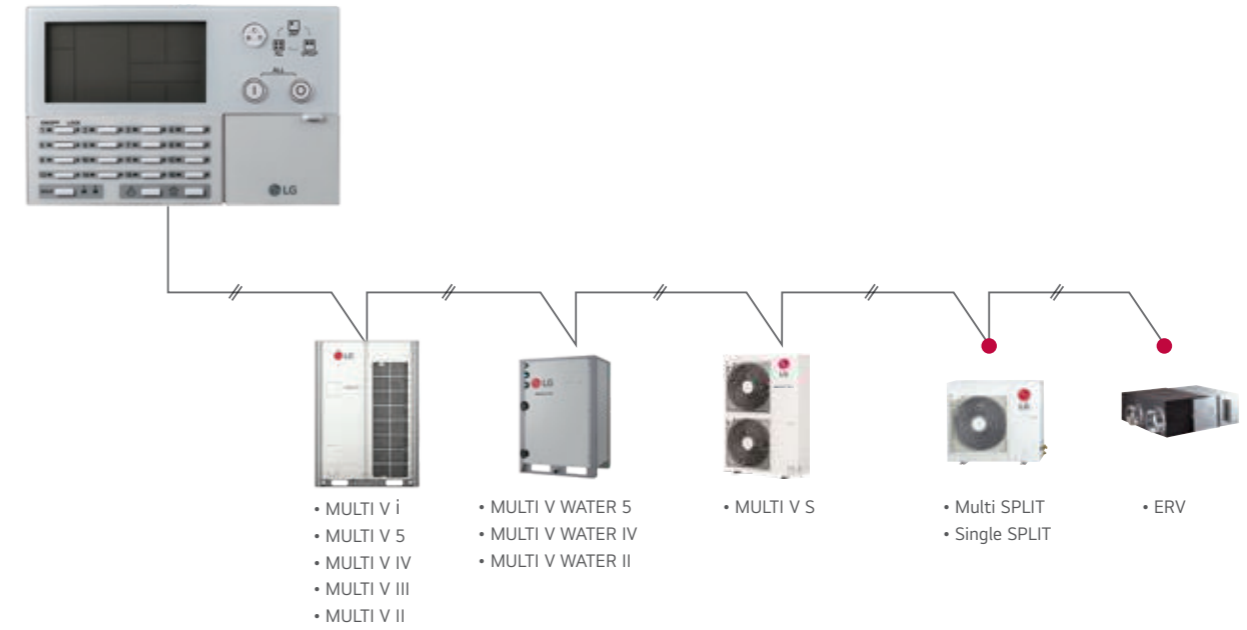

• Appropriate PI485 should be used according to PDB.

PQCSZ250S0

Manage up to 32 indoor units, including ERV .



Features & Benefits

- 32 indoor units control
- Weekly Schedule
- Individual / Group Control

MODEL NAME	PQCSZ250S0
Size (W x H x D, mm)	190 x 120 x 20
Interfaceable Products	MULTI V / ERV / ERV DX
Display	LED / LCD Display
Power	DC 12 V, 1 A
Maximum Number of Units	32
Individual / Group Control	On & Off / Mode / Temperature / Fan Speed
Individual Controller Lock	All
Error Check	○
Slave Mode (Interlocking with Higher Level Controller)	○
Schedule	Weekly

※ ○ : Applied, - : Not Applied

Cloud Gateway




• Applicable to air conditioner models with RS 485 function.

PWFMDB200

Cloud Gateway can remotely control up to 16 indoor units through LG ThinQ or BECON Cloud.


NEW
Cloud Gateway

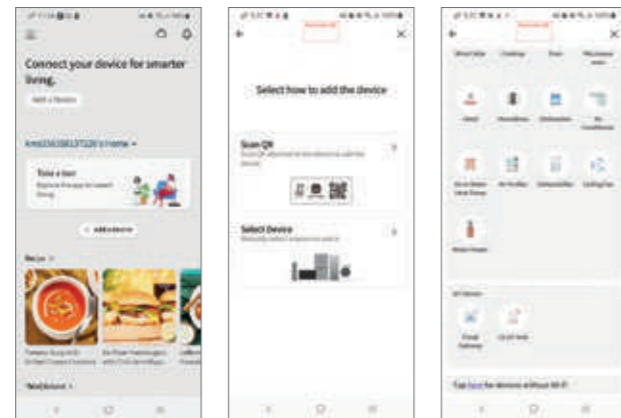

MODEL NAME	PWFMDB200
Size (W x H x D, mm)	120 x 120 x 29
Interfaceable Products	System Air Conditioner
Maximum Number of Units	16
Ethernet	10 / 100 Mbps
Wireless Standards	2.4 GHz, IEEE 802.11b/g/n
Mobile Application	LG ThinQ (Android 7.0 1, iOS 14.0 1)

Function	ThinQ	BECON Cloud ¹⁾
Max. number of unit		16
Remote Control	Operation Start / Stop	○
	Operation Mode	○
	Target Temperature	○
	Fan Speed	○
	Swing	○
	Air Purify	○
Interlocking Product	MULTI V	○ ²⁾
	GHP	○
	MULTI	○
	Single	○
	ERV	X
	Heating	X
Etc	Schedule	○ ⁴⁾
	Electricity Monitoring	X
	History	X
Maintenance	Smart Diagnosis	○
	Cycle Monitoring	X

1) Depending on the region, BECON Cloud may not be available. Please contact to BECON Cloud administrator for checking availability. (BECONcloud-biz@lge.com)
 2) Hydrokits are excluded
 3) Only for Therma V
 4) It will be released until 1Q in 2023.


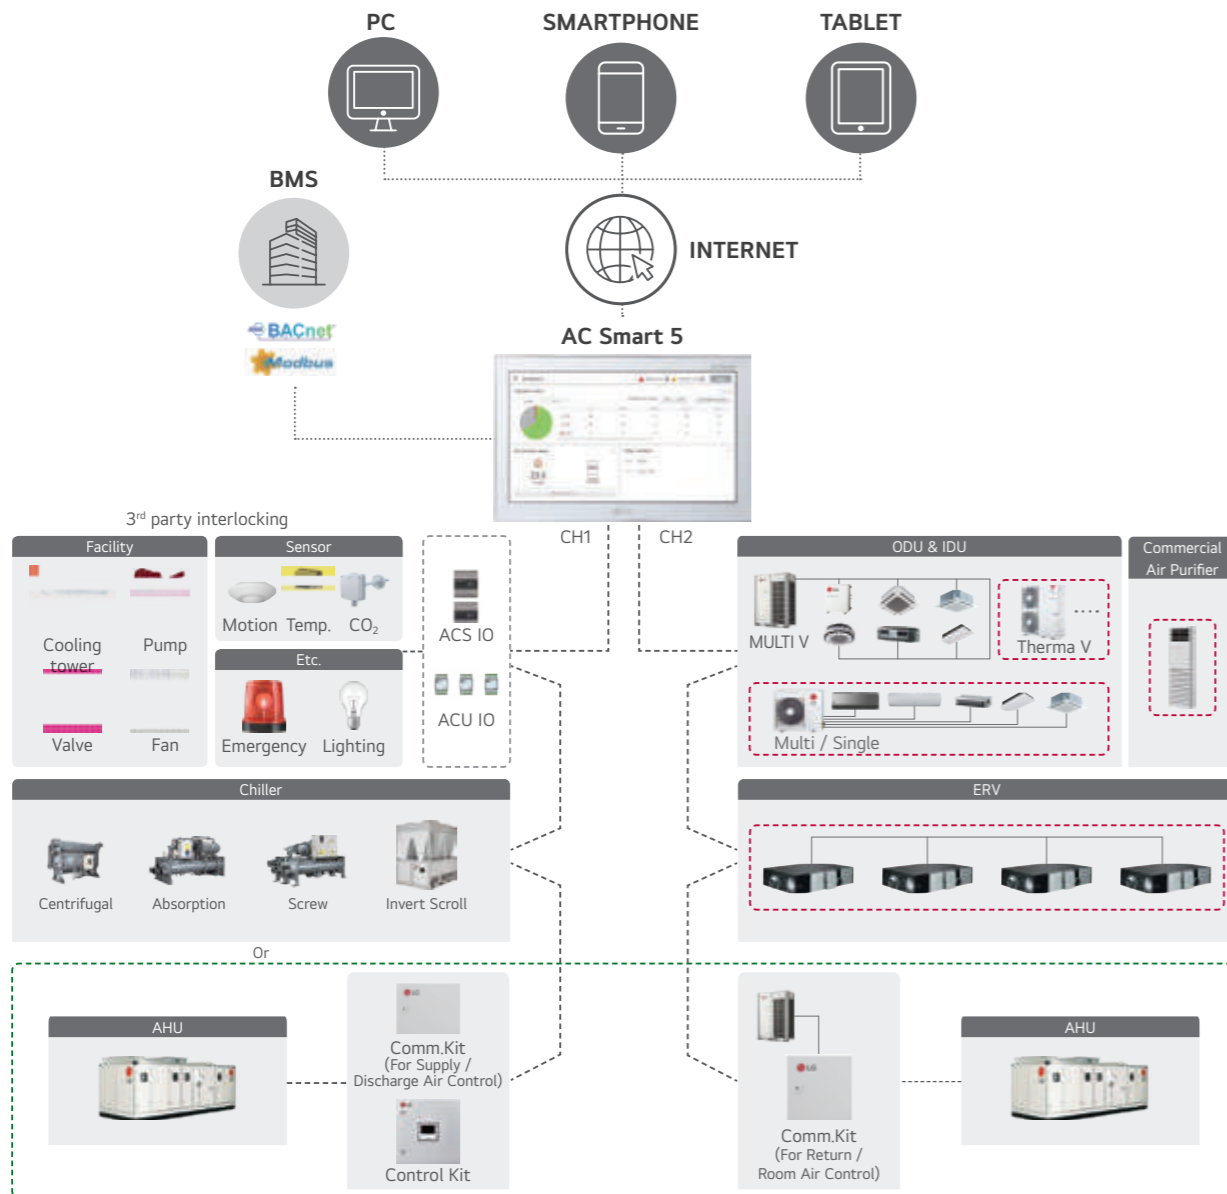


⚡ According to CH1 setting, normal ODU can be connected to CH1.
(Flexible wiring design with 2 ports)
⚡ Appropriate PI485 should be used according to PDB (Product Data Book).
⚡ For details, refer to the product PDB or manual.

AC Smart 5

PACS5A000

10-inch touch screen with HTML5 GUI (Graphic User Interface) for easy control.



MODEL NAME	PACS5A000
Size (W x H x D, mm)	253.2 x 167.7 x 28.9
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro Kit / THERMA V / AHU Kit / LG Chiller / Commercial Air Purifier
Maximum Number of Units	128
Individual / Group Control	On & Off / Mode / Temperature / Fan Speed
Individual Controller Lock	Temperature / Mode / Fan Speed / All
Advanced Function Setting and Display ¹⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level Display / CO ₂ Level Display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Slave Mode (Interlocking with Higher Level Controller)	○
Schedule	Weekly / Monthly / Yearly / Exception Day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 2 / DO 2
BMS Integration ²⁾	BACnet IP / Modbus TCP
IPv6 Support	○

※ ○ : Applied, - : Not Applied
 1) It is only available in some products.
 2) For the detail point list, please refer to the installation manual.

AC Smart 5

Air Purify Total Solution

Air Purify Control




- Easy setting of Air Purify function (Set / Clear)

Air Quality Level Monitoring



System Air Conditioner


Commercial Air Purifier

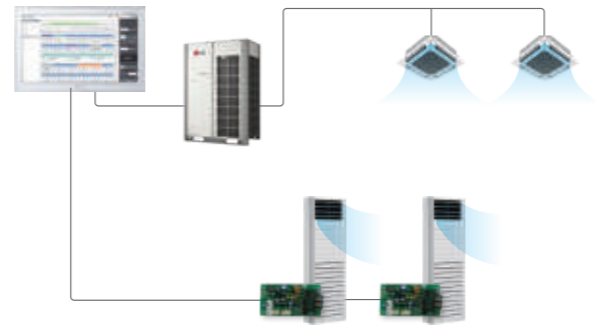

* The Commercial Air purifier must additionally install PI485(PHNFP14A0).

Advanced Network Accessibility

IPv6 (Internet Protocol version 6) is the most recent version of the Internet Protocol, provides accessibility to the IPv6 compatible network environment. In addition, HTML5 allows you to control LG HVAC system on a variety of platforms (PC, Mobile, Tablet), at any time and from any location.

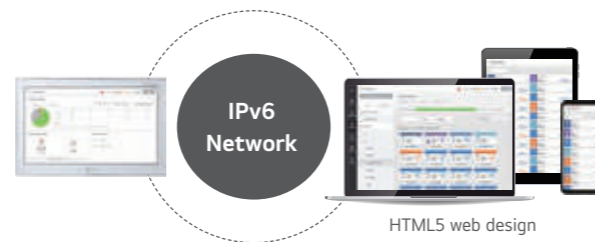

Visualized Control

Visual navigation enables controlling and monitoring the unit.




Multi Level Group Composition

User is able to create multi level group to control and monitor the device easily.




Energy Management

The energy navigation function prevent overuse of system operational costs, analyzing energy consumption and compare allowing by month, week and year by the plan.

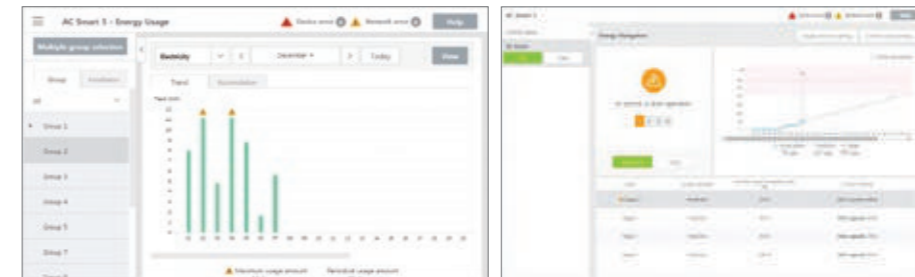


Building Management System (BMS) Integration

AC Smart 5 provides BACnet IP & Modbus TCP interface for BMS integration as well as its own management function without additional device.

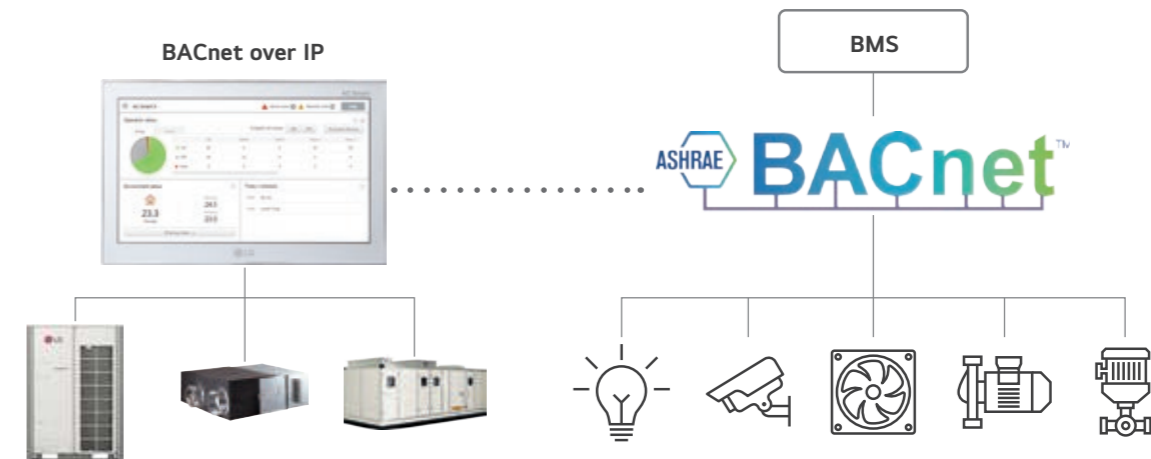


Interlocking with 3rd Party Equipment

AC Smart 5 can make operation scenario with 3rd party equipment by ACS IO Module and ACU IO Module. (Air conditioner only → Sensors, Fans, Pumps, Switches...)

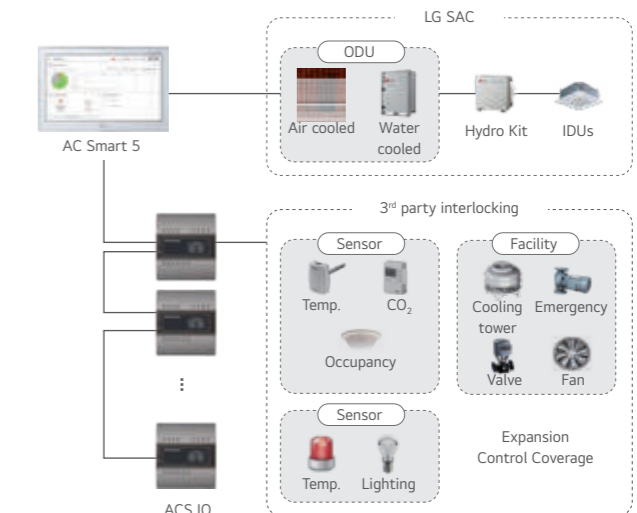

ACP 5

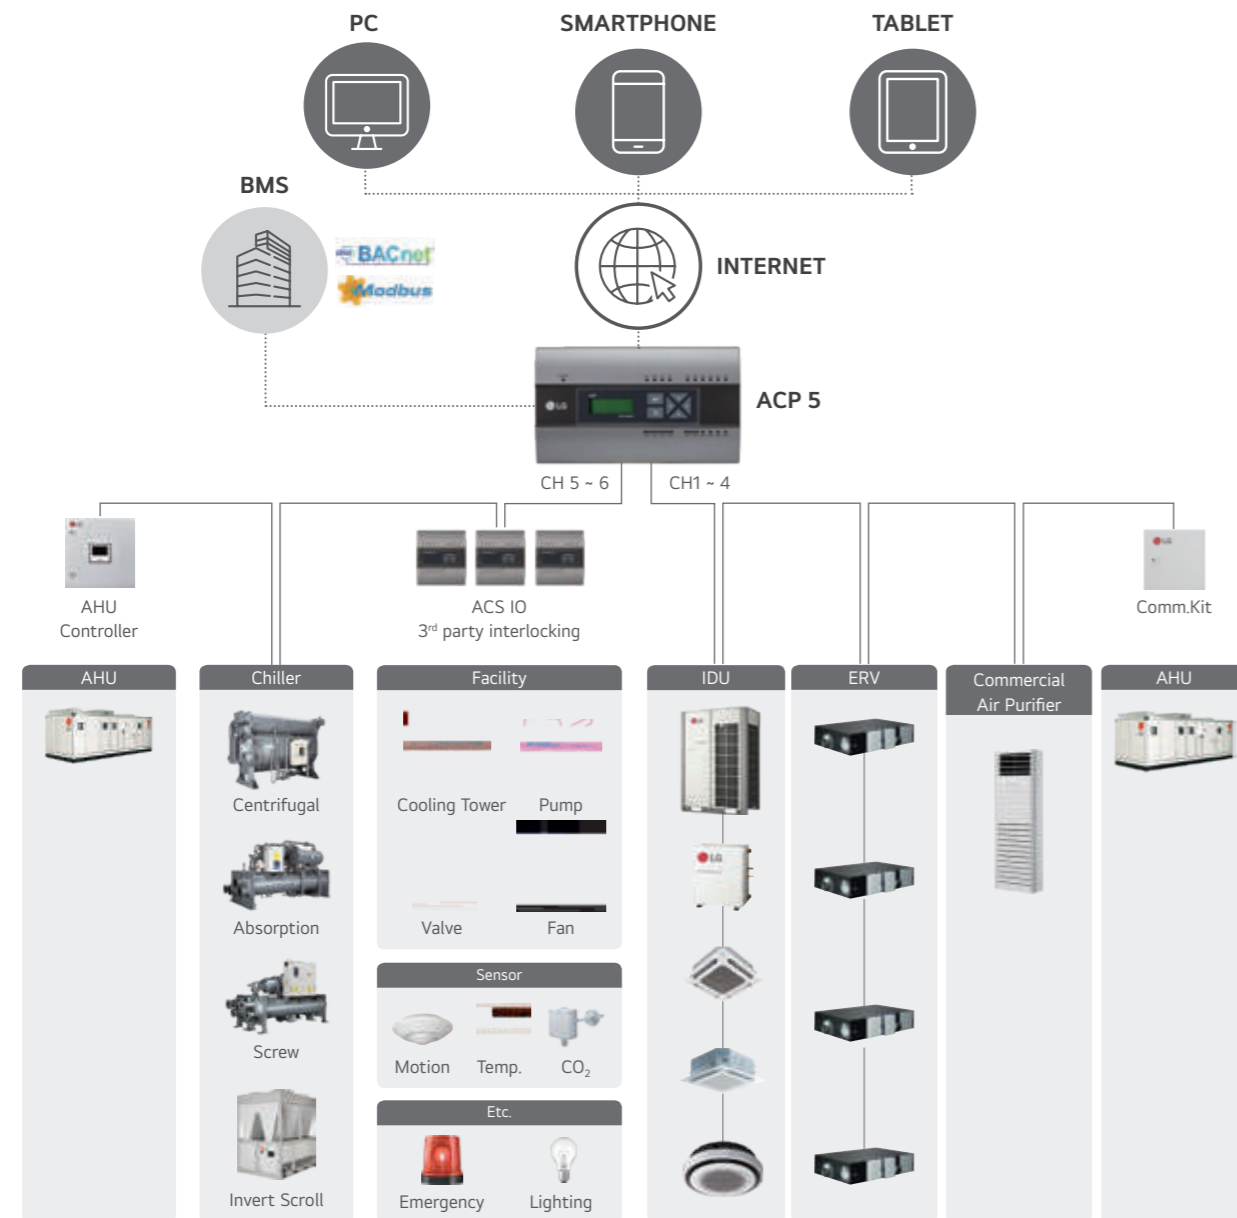

PACP5A000


Advanced solution for BMS integration up to 256 units via BACnet and Modbus protocol as well as its own smart management function with web server interface.



MODEL NAME	PACP5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro Kit / THERMA V / AHU Kit / LG Chiller / Commercial Air Purifier
Maximum number of units	256
Individual / Group Control	On & Off / Mode / Temperature / Fan speed
Individual Controller Lock	Temperature / Mode / Fan speed / All
Advanced Function Setting and Display ¹⁾	Comfort Cooling / ODU Low Noise / ODU Defrost Mode / Comfort Level Display / CO ₂ Level Display (for ERV / ERV DX) / Night Time Free Cooling (for ERV / ERV DX)
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception Day
Web Access	○
Emergency Stop & Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○
Daylight Saving Time	○
External IO Port	DI 10 / DO 4
BMS Integration ²⁾	BACnet IP / Modbus TCP
IPv6 Support	○


※ ○ : Applied, - : Not Applied
 1) It is only available in some products.
 2) For the detail point list, please refer to the installation manual.

Advanced Network Accessibility

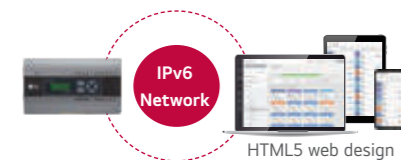


* Fix Public IP is mandatory.
 * Router's Configuration of NAT is mandatory. Open port 80 & 9300.

Energy Navigation

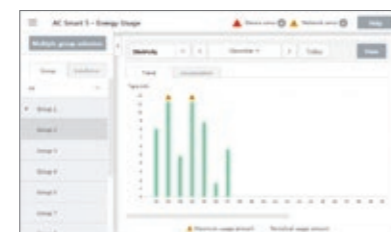


BACnet IP & Modbus TCP

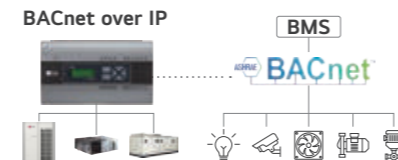


Air Purify Control / Monitoring

Integrated Management

The Commercial Air Purifier can be used with LG central controller to monitor and control.

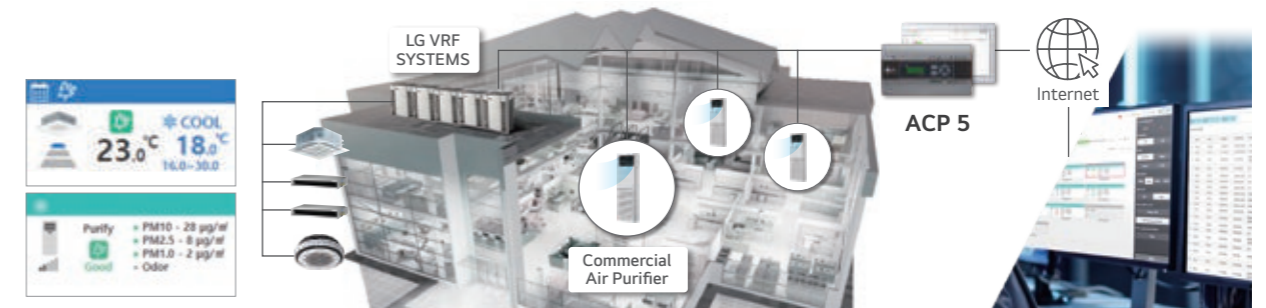

AC Manager 5

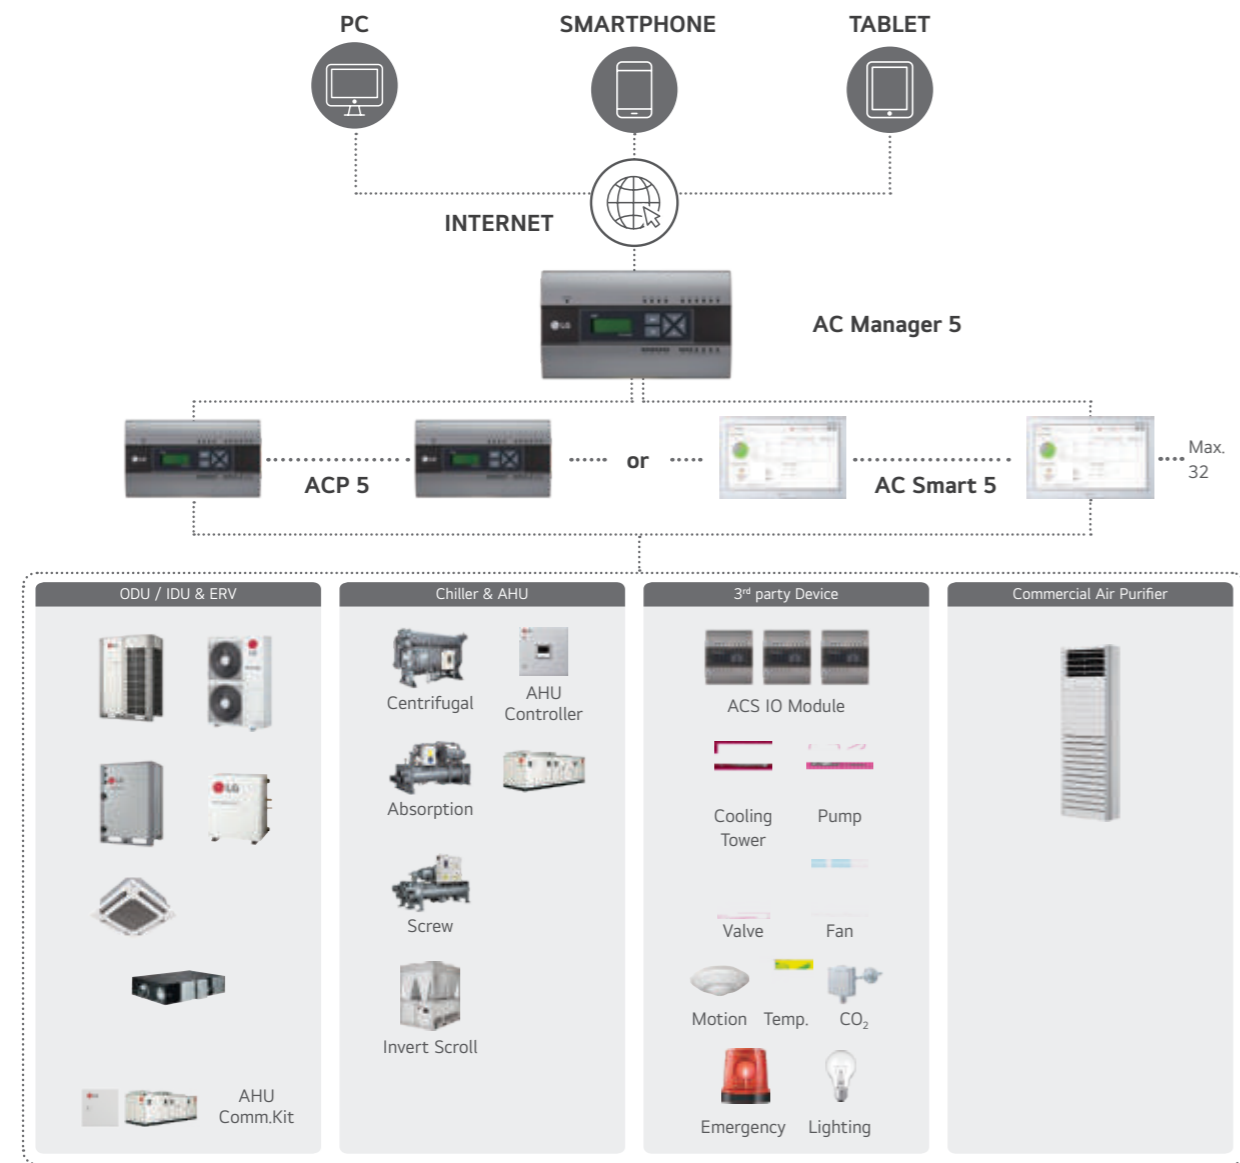

PACM5A000

Multiple ACP and AC Smart integration solution to manage multi sites up to 8,192 units as a single system.



MODEL NAME	PACM5A000
Size (W x H x D, mm)	270 x 155 x 65
Interfaceable Products	MULTI V / ERV / ERV DX / Hydro Kit / THERMA V / AHU Kit / LG Chiller / Commercial Air Purifier
Maximum number of units	8,192 (Supports 32 ACP 5 or AC Smart 5)
Individual / Group Control	On & Off / Mode / Temperature / Fan Speed
Individual Controller Lock	Temperature / Mode / Fan Speed / All
Error Check	○
Schedule	Weekly / Monthly / Yearly / Exception Day
Web Access	○
Emergency Alarm Display	○
Power Consumption Monitoring (with PDI)	○
Auto Changeover / Setback	○
Temperature Limit	○
Operation Time Limit	○
Visual Navigation	○
Operation Trend	○
Air Purify Control	○
Air Quality Level	○
Interlock Control	○
Virtual Group Control	○
ODU Capacity Control	○
Energy Navigation (with PDI)	○

※ ○ : Applied, - : Not Applied
 Note : AC Manager 5 required for ACP 5 or AC Smart 5

Up to 8,192 Connections for Indoor Units

Administrators can easily and conveniently manage multiple LG HVAC equipment.




AC Manager 5


Smart Air Purify Solution

Monitor air quality everyday using Smart Air Purify Solution system.

Air Quality Multi Status view

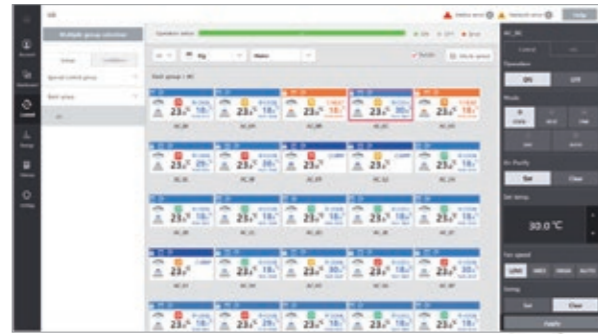


Air Quality Summary Widget

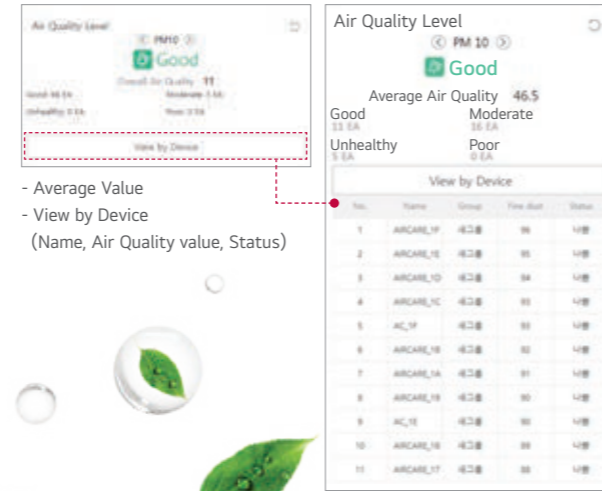


- Average Value
- View by Device (Name, Air Quality value, Status)

Air Purify Control

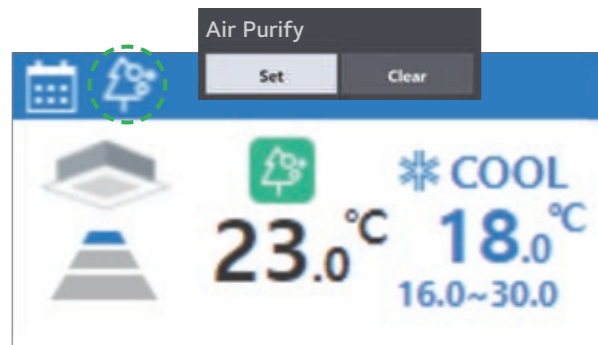

- Easy setting of Air Purify function (Set / Clear)

View Air Quality Trends

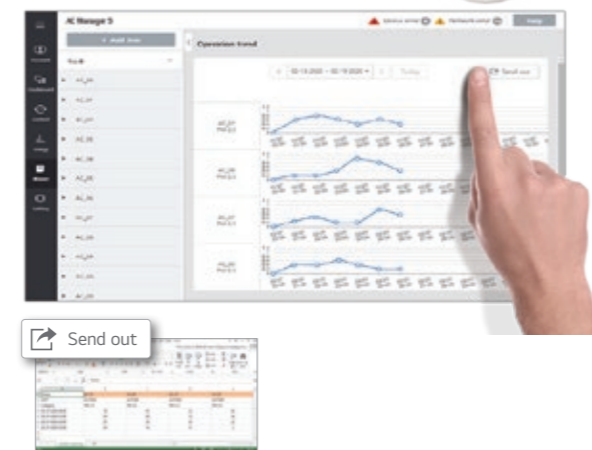

- Daily (per hour), period (30 days) shows trends
- Excel output / easy to manage

Advanced Network Accessibility & User Friendly GUI

As an advanced central controller, AC Manager 5 offers flexible interface for each user by assessing the device screen and automatically customizing the layout to provide the most optimized interface.



Energy Navigation & Energy Usage Graph

Energy navigation is able to set the target usage amount and to control the total accumulated power consumption not exceeding the target usage amount. A total of 7 control levels used to compare the data. There are indoor unit operation ratio, outdoor unit capacity control, and indoor unit operation control.



Peak Control


This function helps to reduce electricity usage. There are two kinds of control logic; Energy saving effect by indoor unit operation rate control and Load management effect by outdoor unit capacity control.

Operation ratio (IDUs) Control



Indoor unit Priority Control
gradually stop depending on importance of room.

ODU Capacity Control

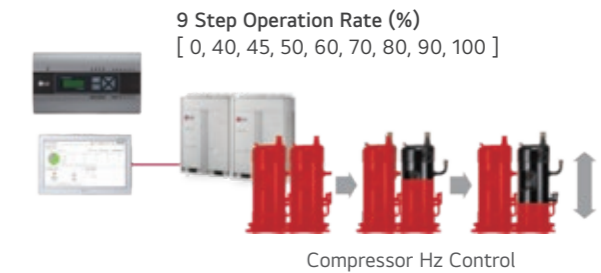


9 Step Operation Rate (%)
[0, 40, 45, 50, 60, 70, 80, 90, 100]

Compressor Hz Control

Multi Level Group Composition

User can create multi level group to control and monitor the device easily.

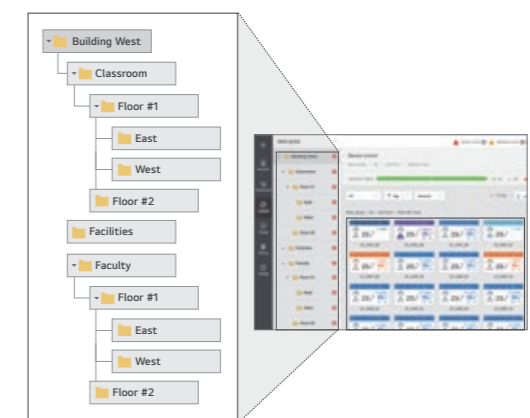

MODBUS RTU Gateway

PMBUSB00A

Providing Modbus RTU connection between LG Air conditioners and BMS.




Features & Benefits

- Function
- Modbus RTU communication with Modbus master controller
- Modbus RTU slave (RS485) / 9,600 bps
- Applicable for MULTI V i, MULTI V 5, ERV, Heating
- Size (W x H x D, mm) : 53.6 x 89.7 x 60.7
- Max. 16 IDUs with single module / Max. 64 IDUs with 4 modules
- Power : DC 12 V (250 mA)
- No slave allowed in LGAP

Installation Scene


Single Module

Max. 16 indoor units with a single module

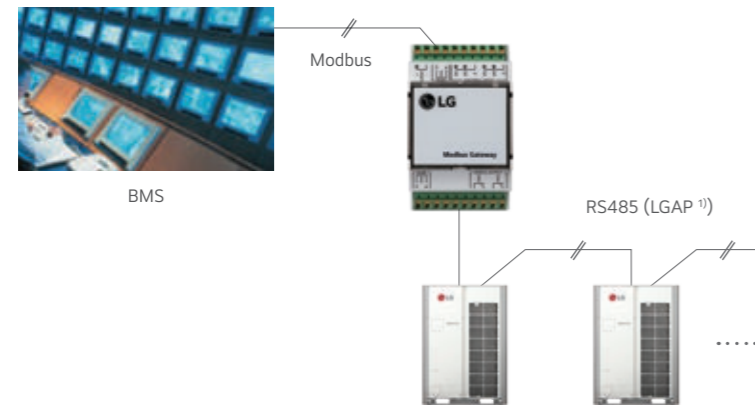

Multiple Module

Max. 64 indoor units with 4 modules in one Modbus communication line

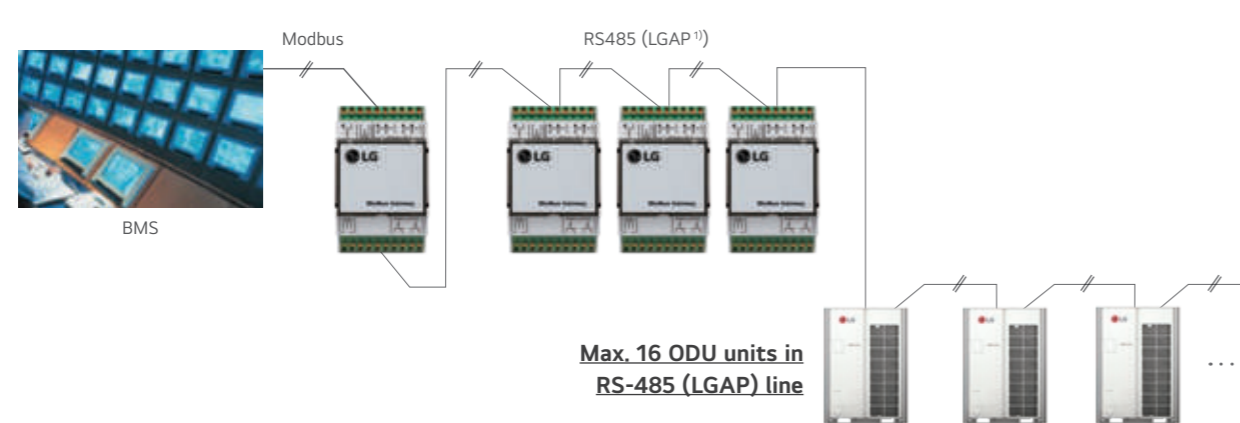

1) LGAP is LG Protocol.
Max. 16 ODU units in RS-485

Modbus Gateway Memory Map

Baud Rate : 9,600 bps, Stop Bit : 1 stop bit, Parity : None Parity, Byte size : 8 bits

Coil Register (0 x 01)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Operate (On / Off)	Operate (On / Off)	Operate (On / Off)	0 : Stop / 1 : Run	Register = N X 16 + ① (N = Indoor Unit Central Address)
2	Auto Swing	Aircon Operate (On / Off)	Hot Water Mode (On / Off)	0 : Disable / 1 : Enable	
3	Filter Alarm Release	Filter Alarm Release ¹⁾	Reserved	0 : Normal / 1 : Alarm Release	
4	Lock Remote Controller	Lock Remote Controller	Lock Remote Controller	0 : UnLock / 1 : Lock	
5	Lock Operate Mode	Lock Operate Mode ¹⁾	Reserved	0 : UnLock / 1 : Lock	
6	Lock Fan Speed	Lock Fan Speed ¹⁾	Reserved	0 : UnLock / 1 : Lock	
7	Lock Target Temp.	Lock Target Temp. ¹⁾	Reserved	0 : UnLock / 1 : Lock	
8	Lock IDU Address	Lock IDU Address ¹⁾	Reserved	0 : UnLock / 1 : Lock	
9	Reserved	Quick Ventilate	Reserved	0 : Disable / 1 : Enable	
10	Reserved	Energy Save	Reserved	0 : Disable / 1 : Enable	

1) : This register value is applied 'DX Ventilator' ONLY.

Discrete Register (0 x 02)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Connected IDU	Connected IDU	Connected IDU	0 : Disconnected / 1 : Connected	Register = N X 16 + ① (N = Indoor Unit Central Address)
2	Alarm	Alarm	Alarm	0 : Normal / 1 : Alarm	
3	Filter Alarm	Filter Alarm ¹⁾	Hot Water Only ²⁾	• 0 : Normal / 1 : Alarm Hydro Kit • 0 : Normal / 1 : Hot Water Only	
4	Reserved	Reserved	Target Temp. Select	0 : Air / 1 : Water	
5	Reserved	Reserved	Error Division ²⁾	0 : CH type error / 1 : BC type error	

1) : This register value is applied 'DX Ventilator' ONLY.

2) : This register value is applied 'Hydro Kit' ONLY.

Holding Register (0 x 03)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Operate Mode	Operate Mode	Operate Mode	• 0 : Cooling, 1 : Dehumidifying, 2 : Fan, 3 : Auto, 4 : Heating Hydro Kit (Middle Temp. DHW) / AWHP • 0 : Cooling, 3 : Auto, 4 : Heating Hydro Kit (High Temp. DHW)	Register = N X 20 + ① (N = Indoor Unit Central Address)
2	Fan Speed	Fan Speed	Target Temp. DHW ²⁾	1 : Low, 2 : Mid, 3 : High, 4 : Auto	
3	Target Temp.	Target Temp. ¹⁾	Target Temp. ²⁾	16.0 ~ 30.0 [°C] x 10	
4	Target Temp. Limit (Upper)	Target Temp. Limit ¹⁾ (Upper)	Reserved	16.0 ~ 30.0 [°C] x 10	
5	Target Temp. Limit (Lower)	Target Temp. Limit ¹⁾ (Lower)	Reserved	16.0 ~ 30.0 [°C] x 10	
6	Reserved	Vent. Operate Mode	Reserved	0 : HEX, 1 : Auto, 2 : Normal	

1) : This register value is applied 'DX Ventilator' ONLY.

2) : This value range can be between 0 ~ 127 [°C]. And it would be limited by upper & lower value according to the setting of remote controller.

Input Register (0 x 04)

NO.	DATA BIT			FUNCTION	REGISTER
	AIR CONDITIONER	ERV / DX ERV	HYDRO KIT & THERMA V		
1	Error Code	Error Code	Error Code	0 ~ 255 ※ Please refer to the product error table.	Register = N X 20 + ① (N = Indoor Unit Central Address)
2	Room Temp.	RA Temp.	Room Temp.	-99.0 ~ 99.0 [°C] x 10	
3	Pipe In Temp.	OA Temp. ¹⁾	Water Inlet Temp.	-99.0 ~ 99.0 [°C] x 10	
4	Pipe Out Temp.	SA Temp. ¹⁾	Water Outlet Temp.	-99.0 ~ 99.0 [°C] x 10	
5	Reserved	Pipe In Temp. ¹⁾	Sanitary Tank Temp.	-99.0 ~ 99.0 [°C] x 10	
6	Reserved	Pipe Out Temp. ¹⁾	Solar Temp. ²⁾	-99.0 ~ 99.0 [°C] x 10	

1) : This register value is applied 'DX Ventilator' ONLY.

2) : This register value is applied 'AWHP' ONLY.



PDI (Power Distribution Indicator)

PQNUD1S40 (Premium, 8 ports) / PPWRDB000 (Standard, 2 ports)

PDI shows distributed power consumption of up to 128 indoor units.





Features & Benefits

- Enables total and indoor power consumption monitoring.
- With LG central control connectivity, energy monitoring, energy savings operations and target usage setting functions are enabled.
- Enables gas consumption and electricity distribution.


MODEL NAME	PQNUD1S40	PPWRDB000
Size (W x H x D, mm)	270 x 155 x 65	
Interfaceable Products	Air conditioner, ERV DX, Hydro Kit, Thermal V	
Maximum Number of Power Meters	EHP : 8 Watt meter GHP : 4 Watt meter / 4 Gas meter	EHP : 2 Watt meter GHP : 1 Watt meter / 1 Gas meter
Maximum Number of Indoor Units	EHP : 128 GHP : 64	
Data Backup When Power Outage	○	
Power Input	PDI : AC 24 V, Transformer : AC 220 V	

※ ○ : Applied, - : Not Applied

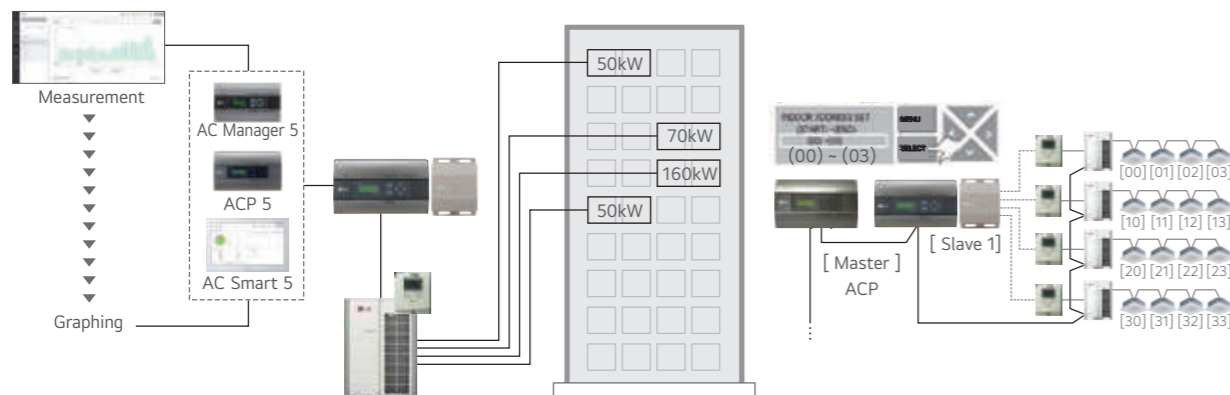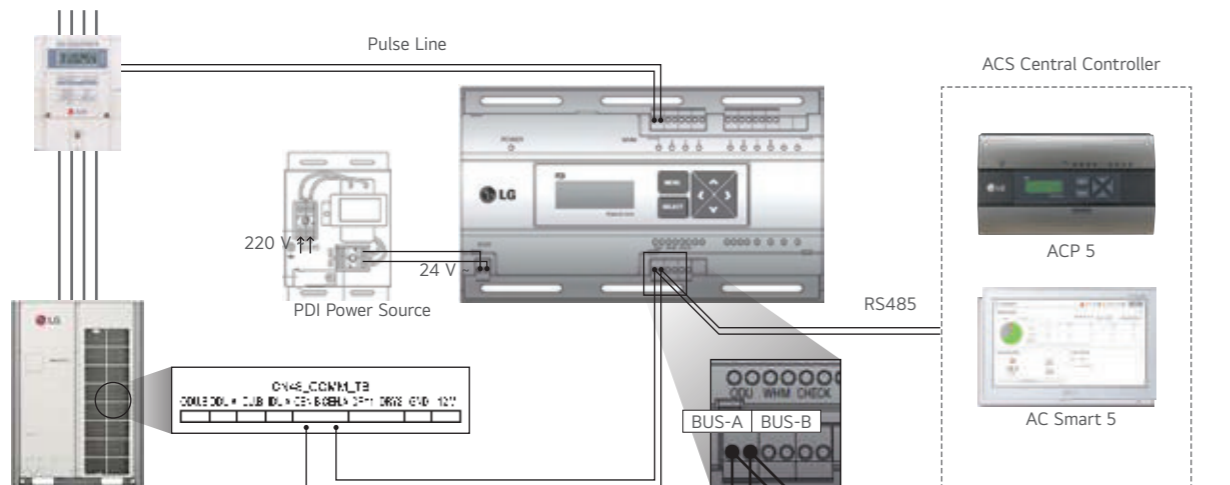

Note :
 1. Power cable and type could be different from this scene depending on the Outdoor unit's specification.
 2. Measured power consumption could be different between PDI and Watt meter.
 3. Applicable Central Controller : ACP 5, AC Smart 5, AC Ez Touch
 (Combination : we recommend to connect separated watt meter for Outdoor units to have correct power distribution value)

ACS IO Module

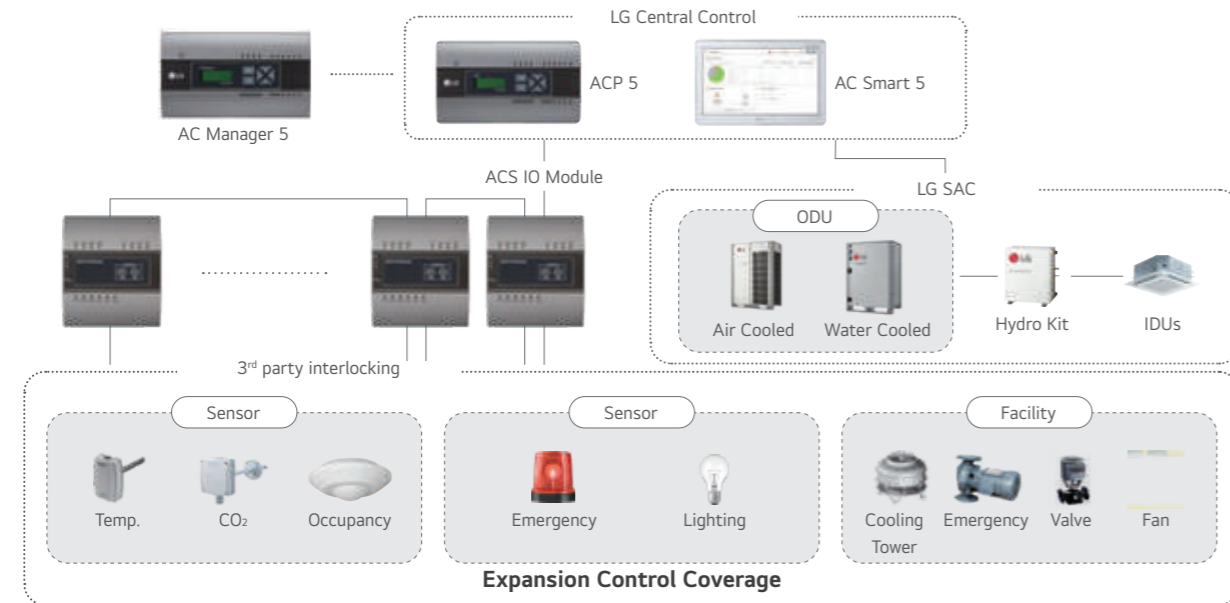


※ DI : Digital Input, DO : Digital Output, UI : Universal Input, AO : Analog Output

Case. 1

Parking Lot Ventilation


Turning on ventilator when CO₂ Level is high

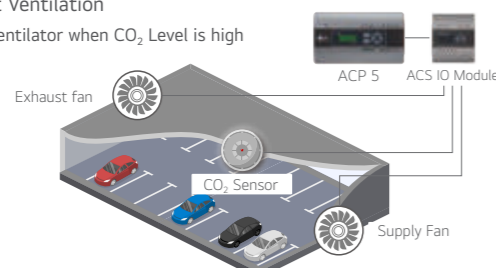

Case. 1

Auxiliary Heater

Turning on aux. heater when outside temp. is very low

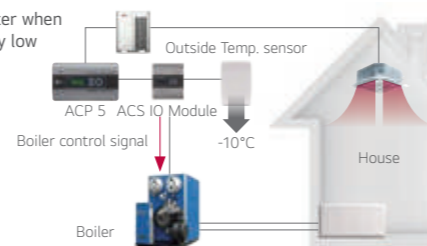

PEXPMB000

This module can be connected with ACP 5 or AC Smart 5 controller if additional I / O points such as DI / DO and AI / AO for 3rd party devices control and monitoring are needed.



Features & Benefits

- Interlocking with 3rd party equipment, LG Central controller can make operation scenario with 3rd party equipment by ACS IO Module.
- Control coverage is expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches ...)
- Power : AC 24 V (60 Hz / 500 mA)

MODEL NAME		PEXPMB000	
Linkable Products		PACSSA000, PACPSA000	
Communication		RS-485	
		1 ch	
I / O	Digital Input	3 ports	
	Digital Output	3 ports	
	Universal Input ¹⁾	4 ports	
	Analog Output	4 ports	
VALUE SPEC		MIN.	MAX.
Analog Input	NTC 10k	0.68 kΩ	177 kΩ
	PT 1000	803 Ω	1,573 Ω
	Ni 1000	871.7 Ω	1,675.2 Ω
Analog Output	DC (Voltage)	0 V	10 V
	DC (Current)	0 mA	20 mA
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal Open	-	30 VAC / 30 VDC, 2 A


※ ○ : Applied, - : Not Applied

¹⁾ The type of UI (Universal Input) is selectable among Digital Input and Analog Input.
Note : ACS IO & ACU IO are not a replacement for Direct Digital Controller(DDC) or PLC.

ACU IO Module

PEXPMB300, PEXPMB200, PEXPMB100

This module can be connected with ACP 5 or AC Smart 5 controller if additional I / O points such as UIO / UI / UO for 3rd party devices control and monitoring are needed.

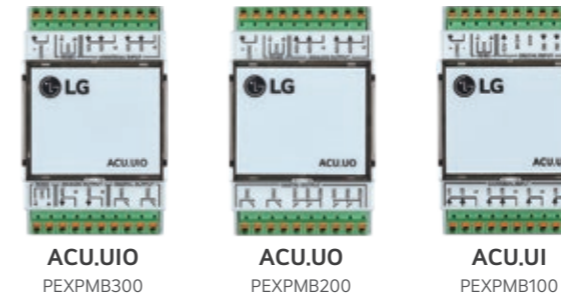

Features & Benefits

- Interlocking with 3rd party equipment LG Central controller can make operation scenario with 3rd party equipment by ACU IO Module.
- Applicable devices are expanded. (Air conditioner only → Sensors, Fans, Pumps, Switches ...)
- Power : 12 VDC / 250 mA (External Power)

MODULE NAME	PEXPMB300	PEXPMB200	PEXPMB100
Linkable Products	PACSSA000, PACPSA000		
Communication RS-485	1 ch	1 ch	1 ch
Digital Input	-	-	3 ports
Digital Output	2 ports	6 ports	-
Universal Input ¹⁾	4 ports	-	6 ports
Analog Output	2 ports	4 ports	-


VALUE SPEC		MIN.	MAX.
Analog Input	DC (Voltage)	0 V	10 V
Analog Output	DC (Voltage)	0 V	10 V
Digital Input	Binary Input (Non Voltage)	-	-
Digital Output	Normal Open	-	30 VDC, 1 A

※ ○ : Applied, - : Not Applied


¹⁾ The type of UI (Universal Input) is selectable among Digital Input and Analog Input.

DRY CONTACT

PDRYCB000

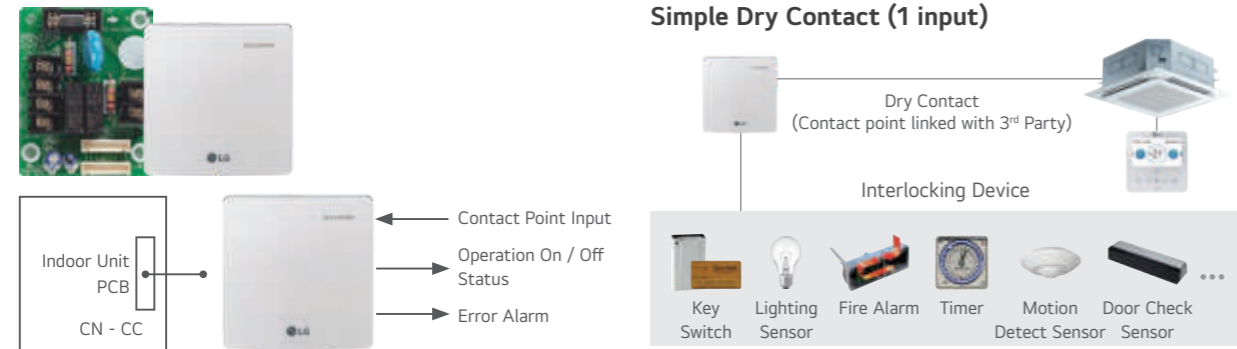

PDRYCB400

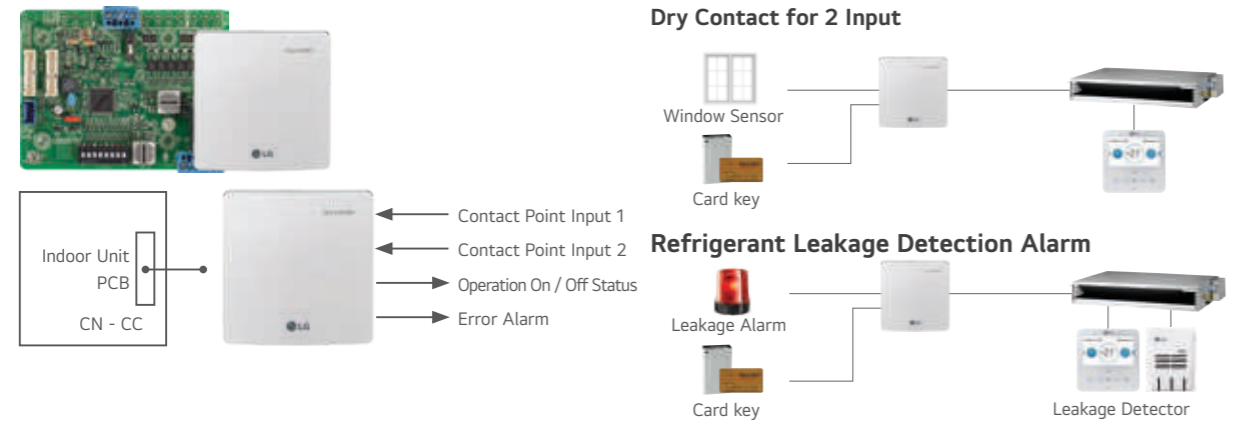


PDRYCB320



※ Please contact our regional office to have full compatible room controller list.

PDRYCB500 / PDRYCB510*

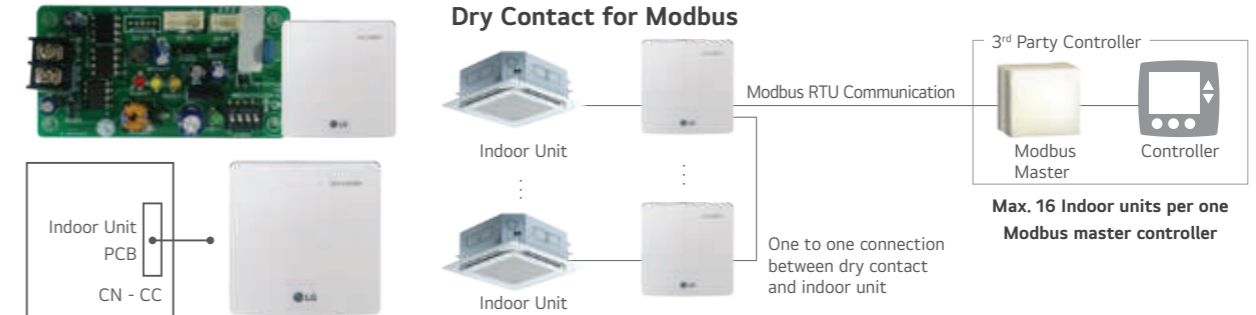

※ Please contact our regional office to check the compatibility with 3rd party room controller.
*No case for PDRYCB510

Specification

Connection between an indoor unit and external devices to control various functions.

MODEL NAME		PDRYCB000	PDRYCB400	PDRYCB320	PDRYCB500 / PDRYCB510*
Case		○	○	○	○
Input Port		1	2	8	-
Universal Input port		-	-	1	-
Comm. Protocol		-	-	-	Modbus RTU
Power		AC 220 V	Connect to Indoor unit PCB (CN_CC) : DC 12 V		
IDU	On / Off	○	○	○	○
	Operation Mode	-	○	○	○
	Set Temp.	-	(Select & Fix)	(Select & Fix)	○
	Fan Speed	-	-	○	○
	Thermo-Off	-	(Select & Fix)	○	-
	Energy Saving	-	(Select & Fix)	-	-
	Lock / Unlock	-	(Select & Fix)	-	-
	On / Off	○	-	○	-
	DHW On / Off	-	-	○	-
	Thermo-Off	-	-	○	-
Heating	Operation Mode	-	-	○	-
	Silent Mode	-	-	○	-
	Emergency Mode	-	-	○	-
	On / Off	○	-	-	○
ERV	Operation Mode	-	-	-	○
	Aircon Mode	-	-	-	○
	Additional Mode	-	-	-	○
	Fan Speed	-	-	-	○
Output	Operation Status	○	○	○	○
	Error	○	○	○	○
	Room Temp.	-	-	-	○

※ ○ : Applied, - : Not Applied
*No case for PDRYCB510

Note :

- Compatibility of PDRYCB320
 - Can use with all types of aircon indoor units after 2010. (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
 - Can use with new single package AK-W model after 2020. 1Q (The previous version Single package is not compatible)
 - Heating : 3 series AWHP split and Monobloc models 4 generation Hydro Kit


2. Compatibility of PDRYCB400

- Can use with all types of air conditioner indoor units after 2010. (Cassette, Ducted, Convertible, Applied PAC, Wall mounted, Console)
- Can use with new single package AK-W model after 2020. 1Q (The previous version Single package is not compatible)
- Can not use with AWHP, Hydro Kit models.

3. (Select & Fix) : This function is preset by rotary switch.


Group Control Wire

PZCWRCG3



MODEL NAME	PZCWRCG3
1 Y-type Cable	0.25 m Length
2 Long Cable	9.6 m Length

Installation Scene

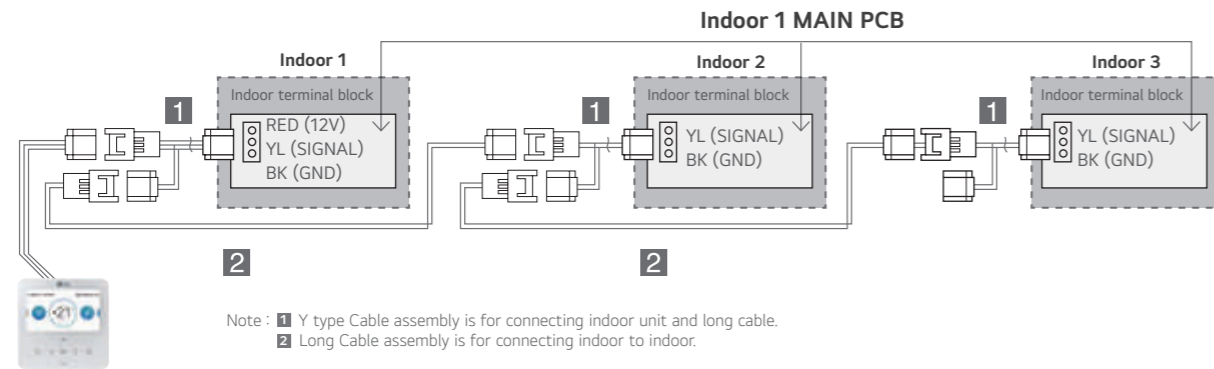

Remote Temperature Sensor

PQRSTA0

Sensor for detecting the room temperature.




Features & Benefits

- It detects the exact room temperature instead of indoor unit's air temperature sensor.
- Applied to Ceiling Mounted Cassette, Ceiling Concealed Duct, THERMA V and Hydro Kit.
- Extension cable (15 m) is included.

Installation Scene

1. Wire to the control box in the indoor unit by removing the existing thermistor and connect the extension cable its place.
2. Cut the extension cable to the appropriate length and connect the screw terminal of the remote sensor.

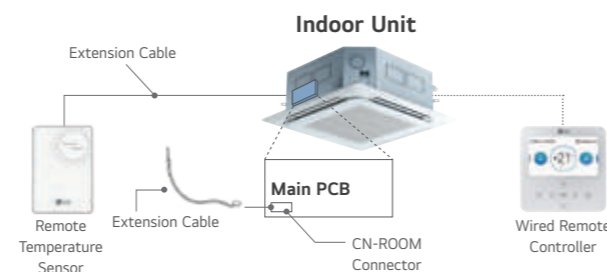

Zone Controller

ABZCA


Controls air conditioning in up to 4 zones by external thermostat.



Features & Benefits

- Controls different zones (up to 4 zones) by external thermostat (AC 24 V)
- Maintain proper air volume of each zone
- Auto variation of dampers
- Auto control of fan speed and On / Off operation

Installation Scene

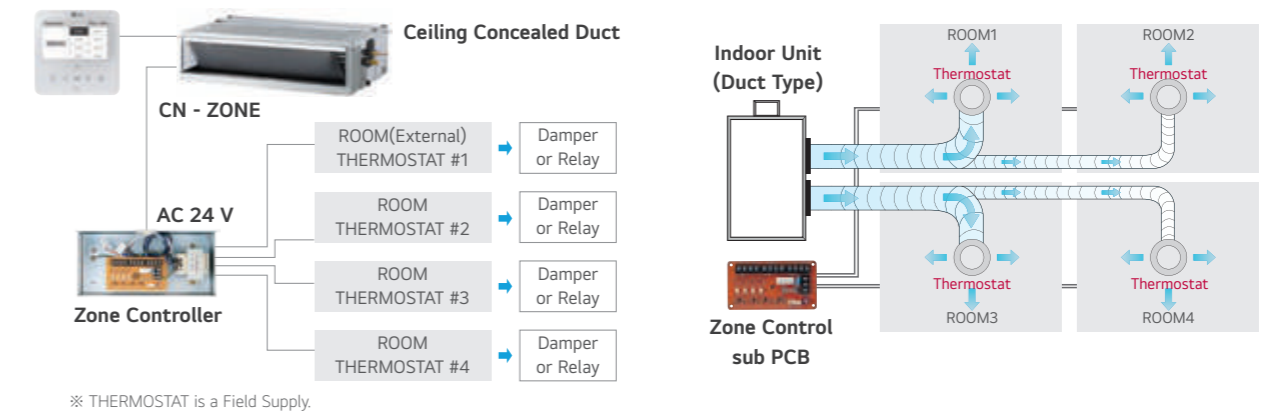

IO Module

PVDSMN000

Interface module between the outdoor unit of system air conditioner and the external device.



Features & Benefits

- Function
- Demand control
- Low noise operation
- Output outdoor or indoor unit operation status
- Output error status

Description

- IO Module is communication interface module for connection between MULTI V i and external IO (Input / Output Module) devices.


Models Applied

- MULTI V IV, 5, i
- MULTI V WATER 5
- MULTI V S

Note : IO Module is not compatible for MULTI V III and MULTI V S R32.

Part Description


- 1) Digital Input Part (DI : Dry Contact Input)
 - Demand control by contact input (3 Step)
 - Low Noise Operation input
 - Priority Setting input : Setting the priority of demand control command (Capacity control for external signal from DDC vs Peak control by LG Central controller)
 - Open : External signal has priority to central controller (Default)
 - Close : Central controller has priority to external signal
- 2) Analog Input Part (AI : DC 0 ~ 10 V)
 - Demand control by analog input (10 Step)
- 3) Digital Output Part (DO : AC 250 V, Max. 1 A)
 - Error status relay output
 - Operation status relay output
 - Valve control

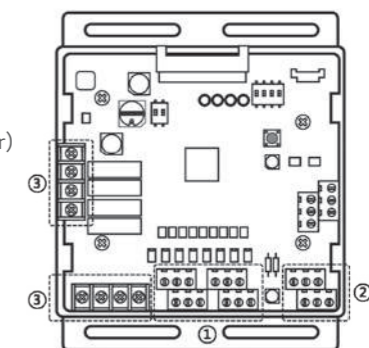

IO Module


ODU Capacity Control

Provides variable settings for ODU Capacity Control according to input method to reduce the power consumption. IO Module supports 2 types of input signal : Analog Inputs (0 ~ 10 V, 10 steps) and contact signals (3 steps)

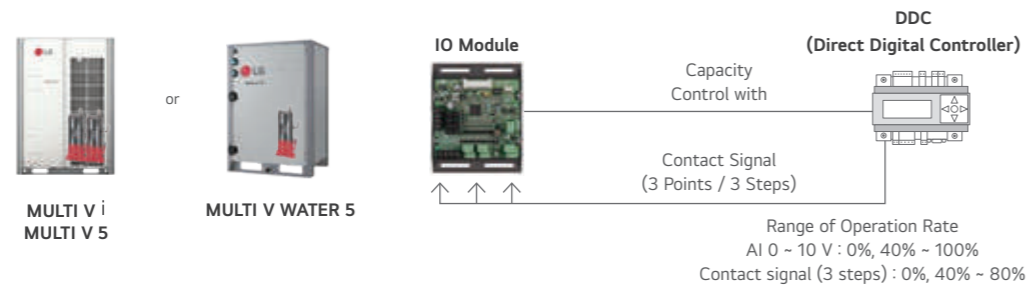

Low Noise Operation


User is able to control outdoor unit's fan speed by dry contact input.

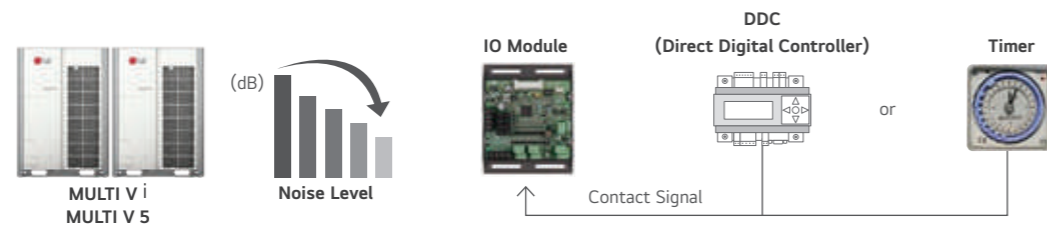

※ 8 HP (22.4 kW) model, Sound power level can be changed by outdoor unit operation status and low noise operation input signal.

Refrigerant Leakage Detection with Pump-down

IO module closes refrigerant valve during Pump-down operation for safety purpose.

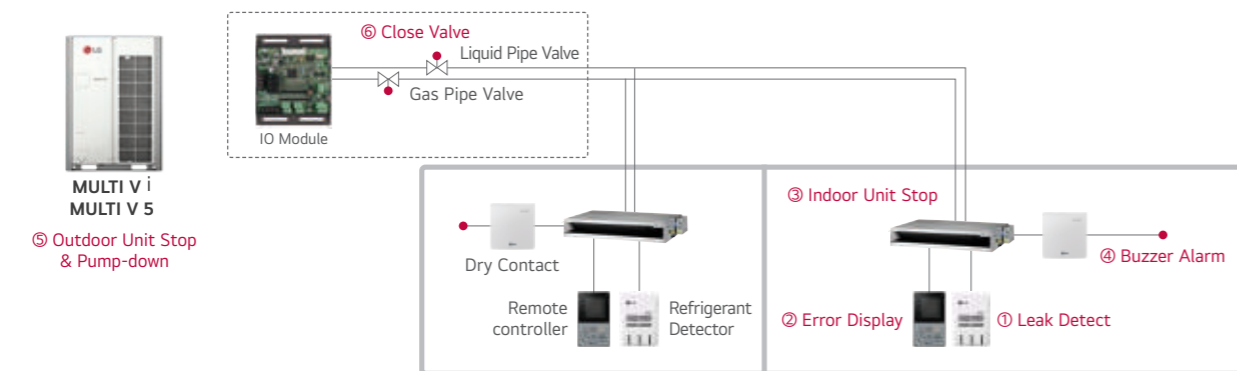


※ If the concentration of the refrigerant in the air exceeds 6,000 ppm more than 5 seconds, the function will be activated. (Refer to operation sequence which written in red, 1-6)

Variable Water Flow Control Kit

PWFCKN000 (MULTI V WATER 5)

Accessory for controlling the water flow.

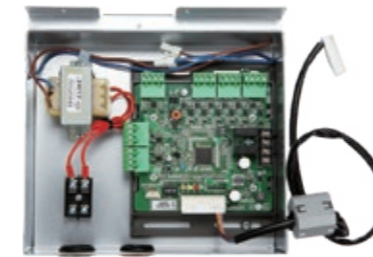

Features

Function


- Water pump or valve control (0 ~ 10 V)
- Minimum output voltage setting available
- Operation, error output (AC 250 V, Max. 1 A)
- Dry contact input and analog output for demand control
- Digital output for operation, error status (AC 250 V, Max. 1 A)

Description

- Water flow consumption reduction
- Pump electricity consumption reduction
- Including IO Module (Dry contact input, Analog input / output, Digital output)
- Using Dry contact and variable water flow control function simultaneously.

Installation Scene

- Flow Control Valve : Regulates the flow or pressure of a fluid, normally responding to signals generated by independent devices.
- Flow Meter : Measures mass flow rate of a fluid traveling through a tube. (The mass flow rate is the mass of the fluid traveling past a fixed point per unit time.)
- Pressure Sensor : Measures the pressure.

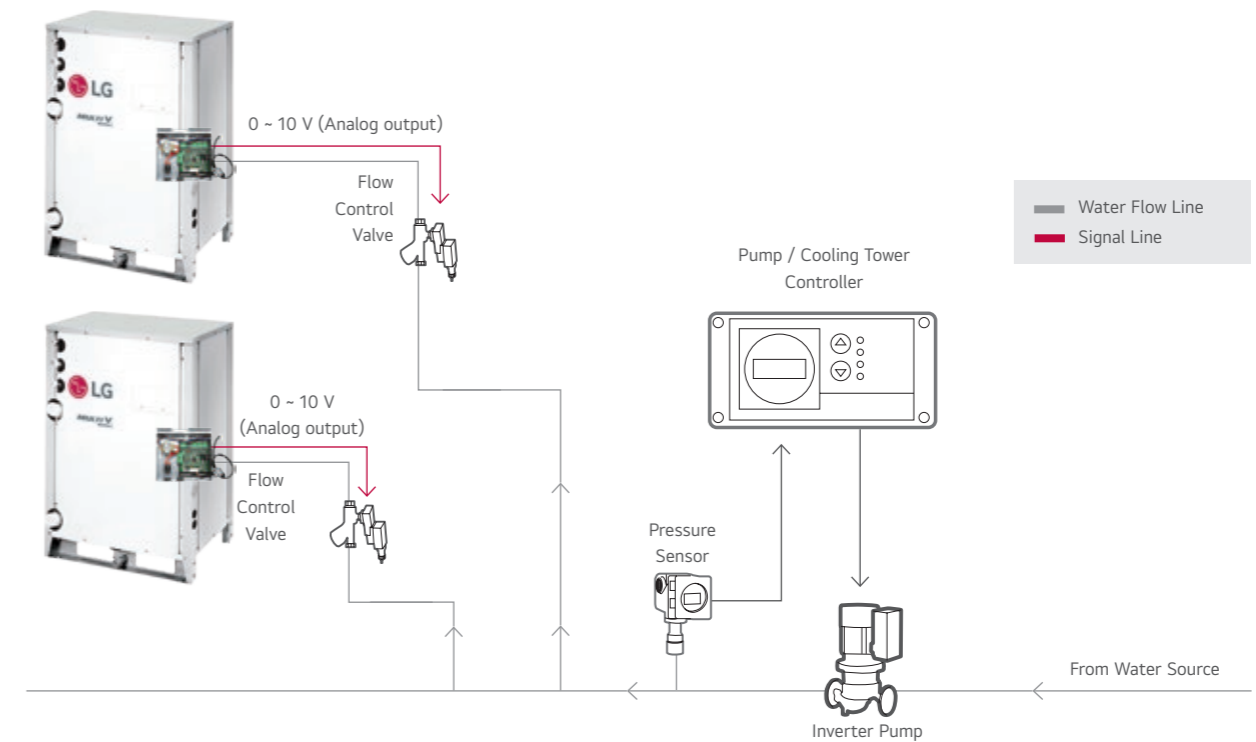

AHU Kit

A solution to connect LG's high efficiency system to the DX coil of an air handling unit for maximum energy savings.

COMMUNICATION KIT



PAHCMR000



PAHCMS000

CONTROL KIT



PAHCNM000


EEV KIT



PRLK048A0
PRLK096A0



PRLK396A0




PRLK594A0

CONTROLLER MODULE



PAHCMM000



PAHCMC000

Specification

Control Application Kit

TYPE	MODEL	DIMENSIONS (MM)			POWER SUPPLY	IP RATING	DESCRIPTION
		W	H	D			
Communication Kit	PAHCMR000	300	300	155	1 Ø, 220 ~ 240 V, 50 / 60 Hz	IP66	Return / Room Air Temperature Control by DDC or LG Individual / Centralized Controller.
	PAHCMS000	380	300	155	1 Ø, 220 ~ 240 V, 50 / 60 Hz	IP66	Discharge Air / Supply Air Temperature Control by DDC or LG Individual / Centralized Controller
Controller Module	PAHCMM000	162	90	61	DC 12 V	IP20	Main Controller Module
	PAHCMC000	108	90	61	DC 12 V	IP20	Communication Controller Module
Control Kit	PAHCNM000	500	500	210	1 Ø, 220 ~ 240 V, 50 / 60 Hz		Various AHU Control Functions with Multiple DX Coils (Maximum connectable ODU is 3 units)

Expansion Application Kit

TYPE	MODEL	DIMENSIONS (MM)			PIPE DIAMETER (MM)	CAPACITY INDEX RANGE
		W	H	D	LIQUID	
EEV Kit	PRLK048A0	217	404	83	12.7	3.6 ~ 28 kW
	PRLK096A0	217	404	83	12.7	28.1 ~ 56 kW
	PRLK396A0	349.5	345.5	180	19.05	56.1 ~ 112 kW
	PRLK594A0	409.5	345.5	180	19.05	112.1 ~ 168 kW


Communication Kit

High Energy Efficiency

LG's DX AHU solutions' superior performance provides a highly efficient heat source system.

- High energy efficiency inverter system
- Large range of expansion application Kit : Max. 168 kW EEV Kit 1)
- Connected to various heat sources : MULTI V, MULTI V WATER, MULTI V S, SINGLE SPLIT

1) Maximum connectable EEV capacity for PAHCMR000, PAHCMS000 is 112 kW.

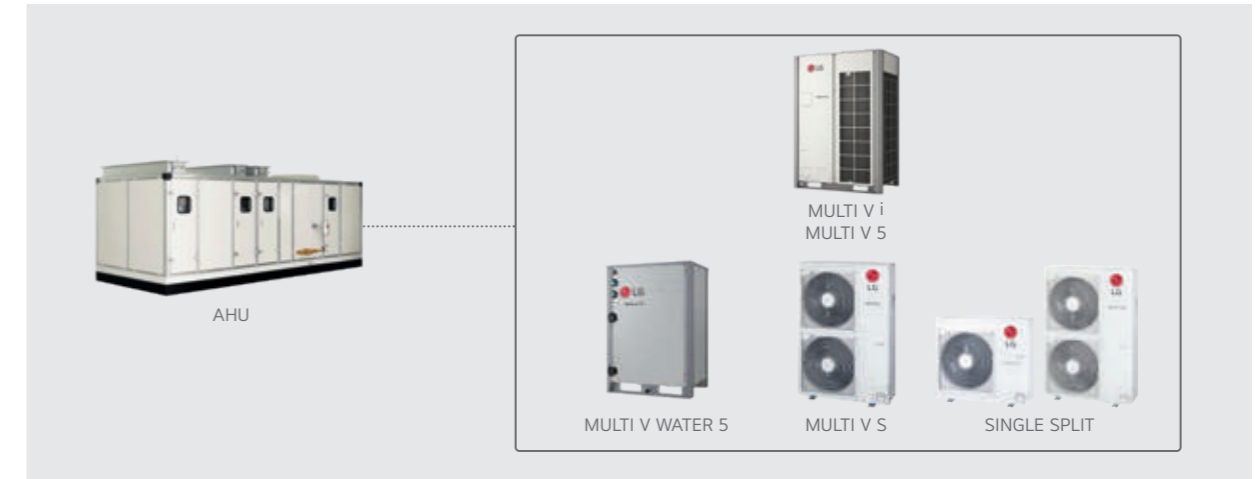


Diverse Options for Control

AHU communication kit can be connected to various control systems such as LG individual / central controller and DDC.¹⁾

It can be directly connected to DDC without separated controller, so DDC can receive product control and monitor information through contact signal or Modbus protocol.

- LG Individual / Central controller supported
 - LG controller stand alone or combination with DDC
- Direct wiring between DDC and AHU communication kit
 - Embedded Digital I / O and Analog Input
 - Modbus RTU protocol supported

1) DDC : Direct Digital Controller

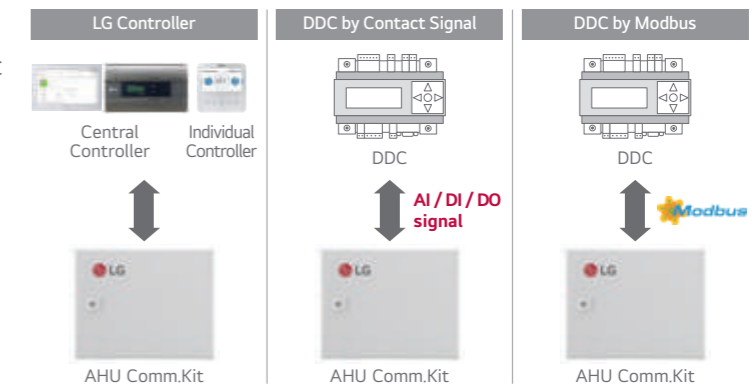


AHU Kit

Communication Kit

Expandable System Design

LG AHU system is suitable for various sites due to its application flexibility and wide range of line up large capacity models. According to the required capacity, a single or multiple module combination is possible due to the AHU communication kit's modular design.


- Multiple module combination for large capacity AHU

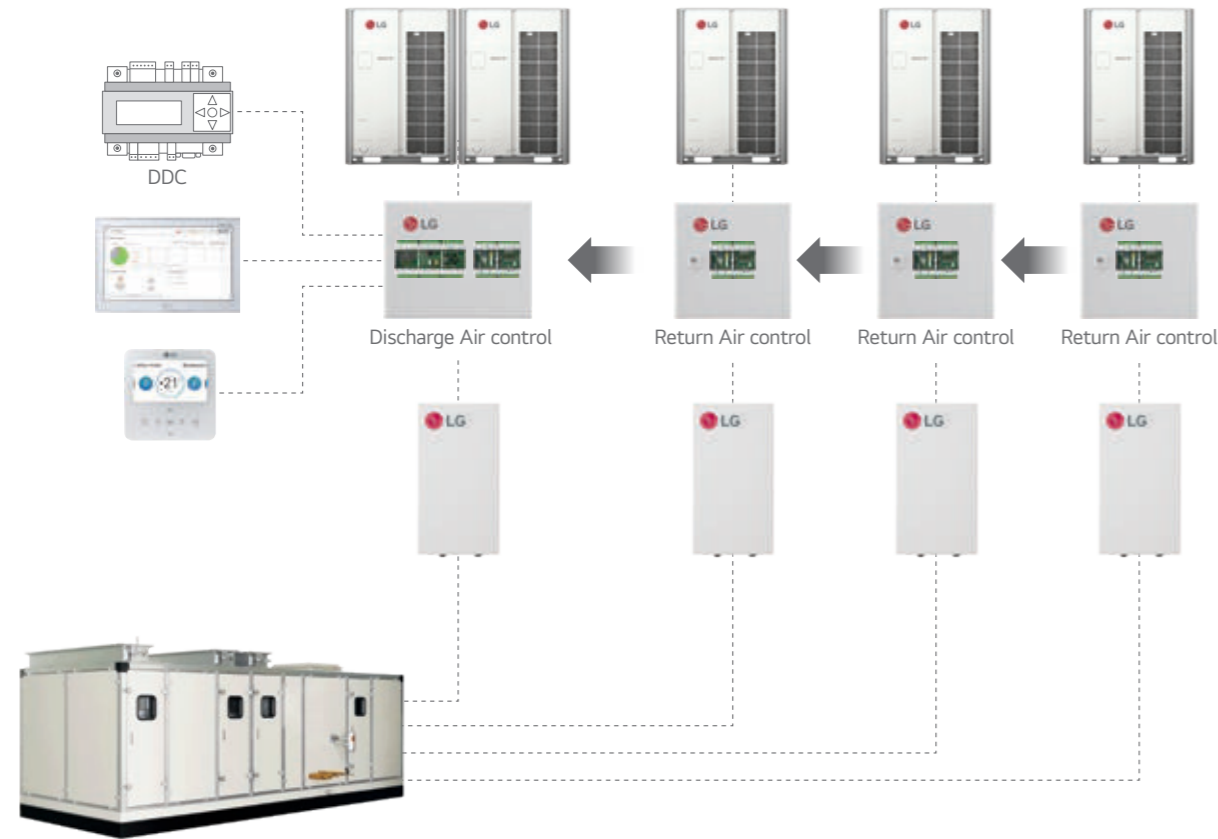

Communication Kit & Controller Module

Single Split Application


Single Split + Return / Room Air Temperature Control

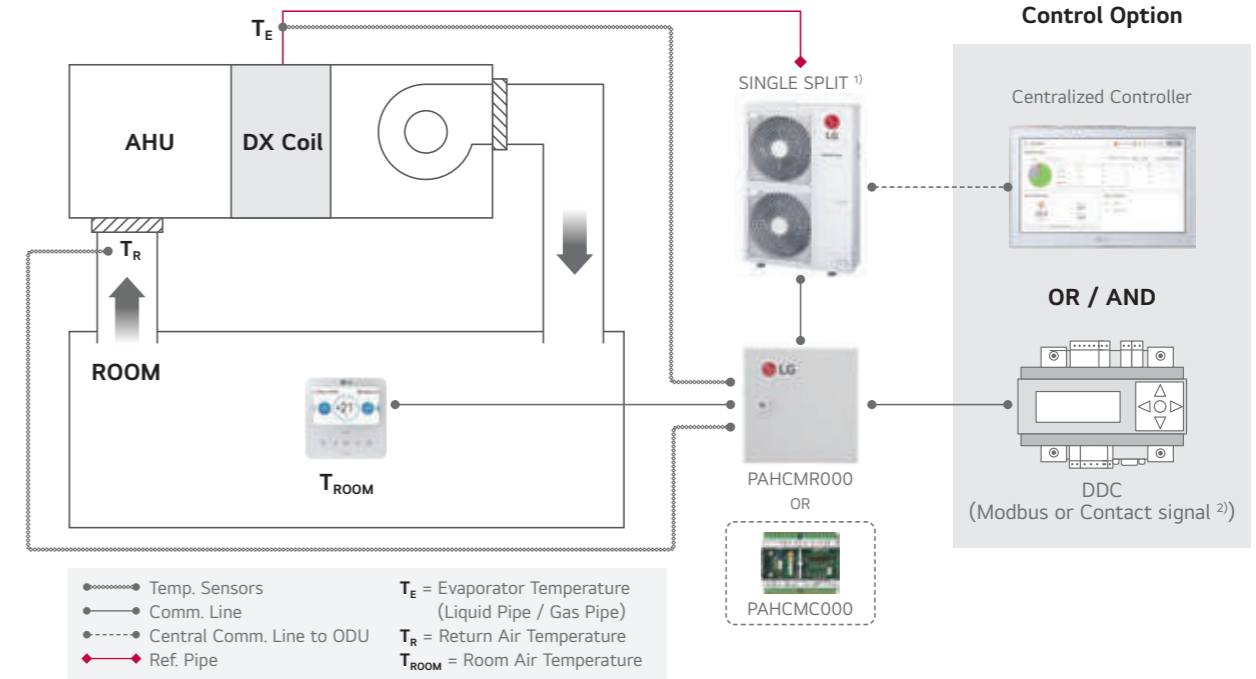

1) PI485 (PMNFP14A1) is required for centralized controller.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.

Single Split Application

Single Split + Discharge Air Temperature Control

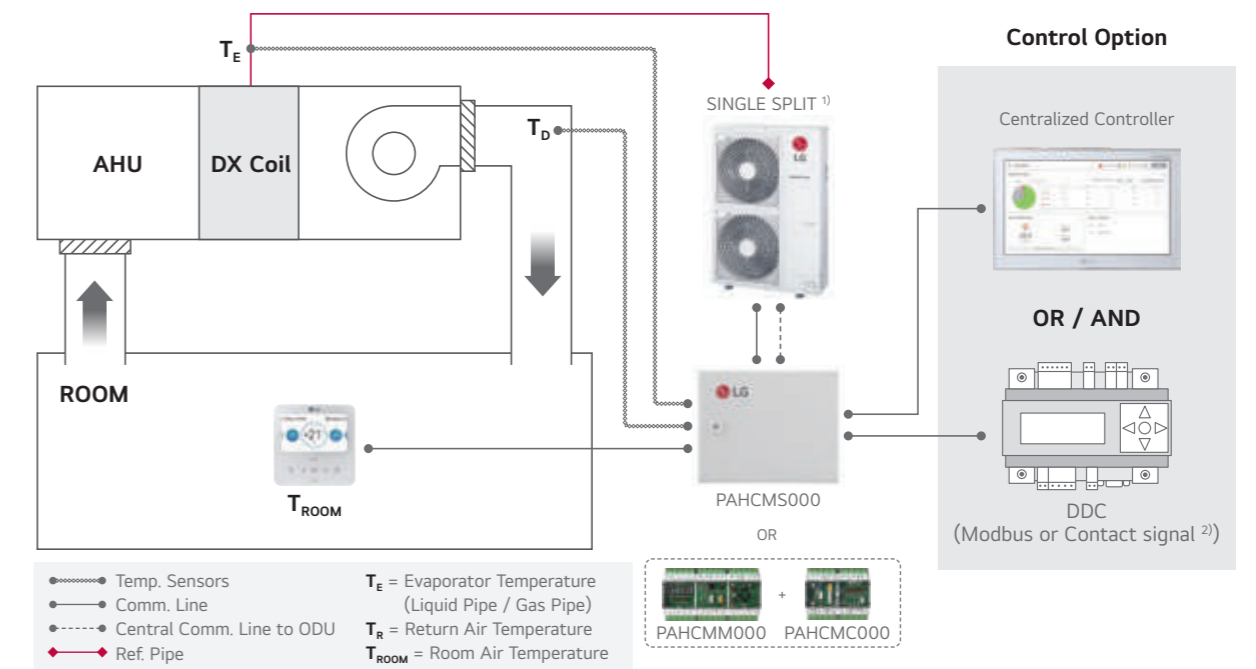


1) PI485 (PMNFP14A1) is required for centralized controller.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.

AHU Kit

Communication Kit & Controller Module

MULTI V Application


MULTI V + EEV Kit + IDU + Return / Room Air Temperature Control

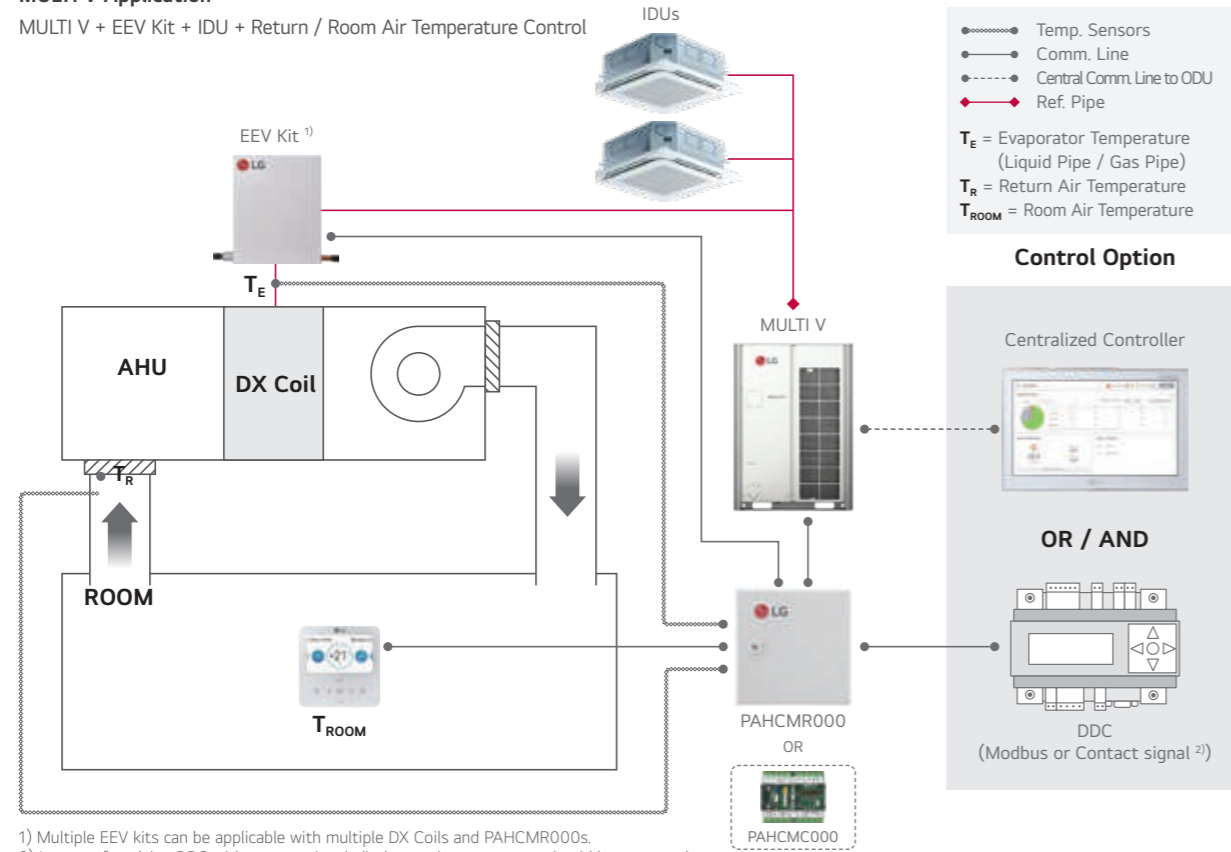

1) Multiple EEV kits can be applicable with multiple DX Coils and PAHCMR000s.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.

MULTI V Application

MULTI V + EEV Kit + Discharge Air Temperature Control

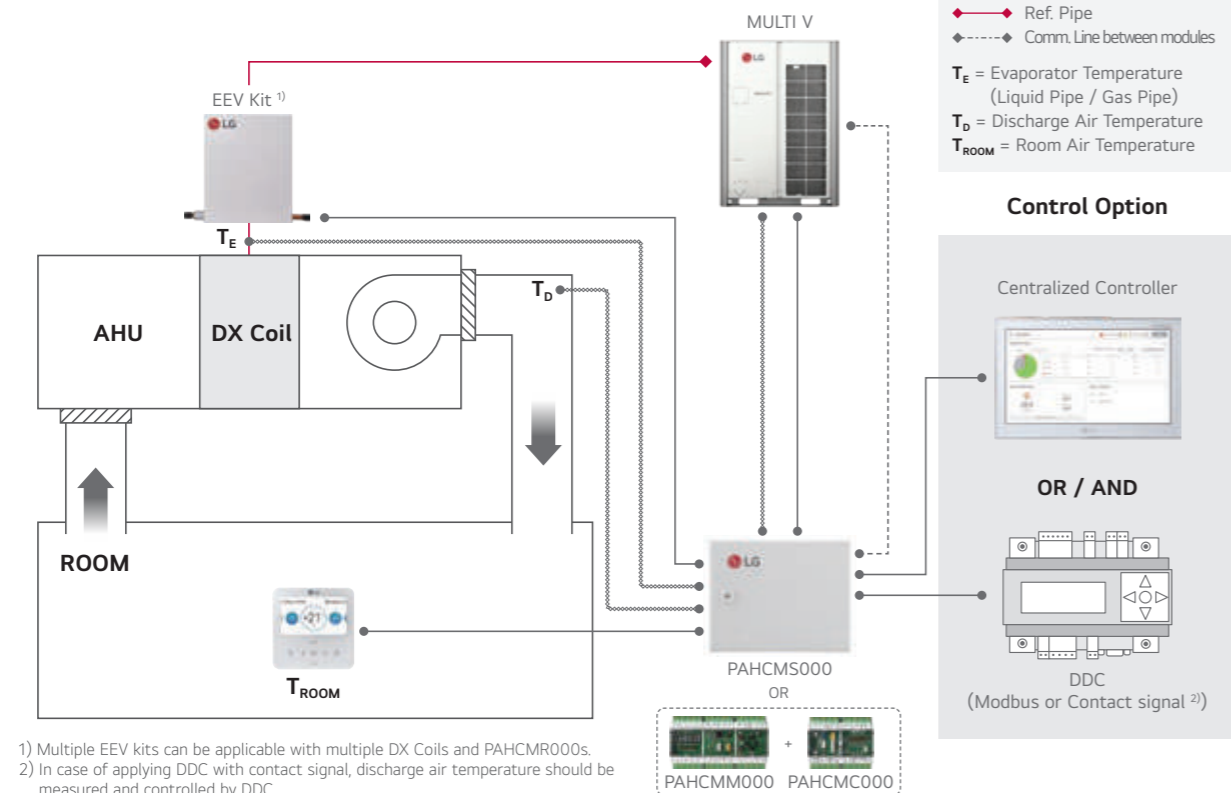

1) Multiple EEV kits can be applicable with multiple DX Coils and PAHCMR000s.
 2) In case of applying DDC with contact signal, discharge air temperature should be measured and controlled by DDC.
 Note : For more detail, please refer to the PDB.

Communication Kit Function

Communication with DDC via Contact Signal

FUNCTION LIST	PAHCMR000 (PAHCMC000)	PAHCMS000 (PAHCMM000 + PAHCMC000)	TYPE	NOTE
Operation On / Off	On / Off	On / Off	Digital Input (Non Voltage)	-
Operation Mode	Cooling / Heating	Cooling / Heating	Digital Input (Non Voltage)	Available operation mode can vary depending on the settings of Communication Kit
Return (Room) Air Temperature ²⁾	16 ~ 30°C	-	Analog Input (DC 0 ~ 10 V / 20 mA)	-
Control ¹⁾				
Discharge Air Temperature ²⁾	-	-	-	Discharge air temperature should be controller directly by DDC using 'ODU Capacity Control'
Fan Speed ³⁾	-	High / Middle / Low	Digital Input (Non Voltage)	-
Forced Thermal	On / Off	-	Digital Input (Non Voltage)	-
ODU Capacity	-	10 ~ 100%	Analog Input (DC 0 ~ 10 V / 20 mA)	-
Emergency Stop	-	Stop / Normal	Digital Input (Non Voltage)	-
Monitor				
Operation	On / Off	On / Off	Digital Output (Max. : DC 30 V / 1 A, AC 250 V / 1 A)	For PAHCMR000, dip sw1-3 DO Type should be set 'Off' (Status), In this case, 'fan speed' cannot be monitored by DO ports
Operation Mode	-	-	-	It needs to be checked through control signal
Fan Speed	High / Middle / Low	High / Middle / Low	Digital Output (Max. : DC 30 V / 1 A, AC 250 V / 1 A)	For PAHCMR000, dip sw1-3 DO Type should be set 'On' (Fan Mode) In this case, 'On / Off, defrost, error Status' cannot be monitored by DO ports
Defrost Operation	Defrost / Normal	Defrost / Normal	Digital Output (Max. : DC 30 V / 1 A, AC 250 V / 1 A)	For PAHCMR000, dip sw1-3 DO type should be set 'OFF' (Status), In this case, 'fan speed' cannot be monitored by DO ports
Error Alarm	Error / Normal	Error / Normal	Digital Output, Relay C contact (Max. : DC 30 V / 1 A, AC 250 V / 1 A)	-
Compressor On / Off	-	On / Off	Digital Output, (Max. : DC 30 V / 1 A, AC 250 V / 1 A)	-

1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) The range of temp. is differ depending on the type of the controller.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 Note : For more detail information, please refer to the product data book.

Communication with DDC via Modbus protocol

FUNCTION LIST	PAHCMR000 (PAHCMC000)	PAHCMS000 (PAHCMM000 + PAHCMC000)	NOTE
Operation On / Off	On / Off	On / Off	
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	
Return (Room) Air Temperature	16 ~ 30°C	-	
Control ¹⁾			
Discharge Air Temperature ²⁾	-	○	Dip SW1-2 Discharge Temp. Control Type should be set 'On' Standard II : 16 ~ 30°C Standard III ⁴⁾ : 12 ~ 50°C
Fan Speed ³⁾	High / Middle / Low	-	
Forced Thermal On / Off	-	-	
ODU Capacity Control ²⁾	-	10 ~ 100%	Dip SW1-2 Discharge Temp. Control Type should be set 'On'
Emergency Stop	-	-	
Monitor			
Operation	On / Off	On / Off	
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	
Return (Room) Air Temperature	○	-	Corresponding air temperature sensor connected to AHU Comm.Kit is required
Discharge Air Temperature	-	○	
Fan Speed	High / Middle / Low	High / Middle / Low	
Defrost Operation	Defrost / Normal	Defrost / Normal	
Error Alarm	Error / Normal, Error Code	Error / Normal, Error Code	
Compressor On / Off	On / Off	On / Off	

※ ○ : Applied, - : Not Applied
 1) Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 2) In case of PAHCMS000, control type between "Discharge Air Temperature" and "ODU Capacity Control" is selectable.
 3) To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 4) Standard III wired remote controller after version 2.10.5a.
 Note : For the Modbus memory map and more detail information, please refer to the product data book.

AHU Kit

Communication Kit Function







With LG Control System (Individual & Centralized Controller)

FUNCTION LIST	PAHCMR000 (PAHCMC000)	PAHCMS000 (PAHCMM000 + PAHCMC000)	NOTE
Operation On / Off	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	Available operation mode can vary depending on the settings of Communication Kit
Return (Room) Air Temperature ²⁾	16 ~ 30°C	-	-
Discharge Air Temperature ²⁾	-	○	Standard II : 16 ~ 30°C Standard III ⁴⁾ : 12 ~ 50°C Central Controllers : 12 ~ 50°C
Fan Speed ³⁾	High / Mid / Low	High / Mid / Low	To control the AHU fan, dip switch 1-3 'DO type' should be set 'On (Fan Speed)' (PAHCMR000)
Operation	On / Off	On / Off	-
Operation Mode	Cooling / Heating / Fan	Cooling / Heating / Fan	-
Return (Room) Air Temperature	○	-	-
Discharge Air Temperature	-	○	Standard II : 11 ~ 39.5°C Standard III ⁴⁾ : 0 ~ 100.0°C Central : -50.0 ~ 100.0°C
Fan Speed	High / Middle / Low	High / Middle / Low	-
Defrost Operation	On / Off	On / Off	Only with Individual Controller
Error Alarm	Error Code	Error Code	Error code will be displayed on the screen
Compressor On / Off	On / Off	On / Off	Only with Individual Controller

※ ○ : Applied, - : Not Applied

- Control functions for LG individual and central controller are not available in case of using together with DDC via contact signal.
 - The range of setting temperature is different depending on the type of the controllers. And operation may differ from setting range.
 - To control fan speeds, DO port of the fan speed status should be connected to the fan control panel.
 - Standard III wired remote controller after version 2.10.5 a.
- Note : For more detail information, please refer to the product data book.

Compatibility with LG HVAC Controllers

CONTROLLER	INDIVIDUAL CONTROLLER			CENTRALIZED CONTROLLER					PDI
	PREMIUM	STANDARD III	STANDARD II	AC EZ	AC EZ TOUCH	AC SMART 5	ACP 5	AC MANAGER 5 ¹⁾	PREMIUM STANDARD
									
Model no.	PREMTA000 PREMTA000A PREMTA000B	PREMTB101 PREMTBB11	PREMTB001	PQCSZ250S0	PACEZA000	PACSSA000	PACP5A000	PACM5A000	PQNUD1S40 PPWRDB000
PAHCMR000	○	○	○	○	○	○	○	○	○
PAHCMS000	-	○	○	-	-	○	○	○	-

※ ○ : Applied, - : Not Applied

- AC Manager 5 is an integrator, so the installation with AC Smart 5 or ACP 5 is required.
- Note : 1. Dry contact for indoor unit (PDRYCB000 / 400 / 300 / 500) is not applied.
2. For more details, please refer to the product data book.

Outdoor Unit Compatibility

For Small Size Application (~ 15kW) - Single Split

TYPE	MODEL	UUA1 (2.5 ~ 5.0 KW) ¹⁾	UUB1 (5.0 ~ 8.0 KW) ¹⁾	UUC1 (7.1 ~ 10.0 KW) ¹⁾	UUD1 / UUD3 (10.0 ~ 15.0 KW) ¹⁾
Communication Kit (Controller Module)	PAHCMR000 (PAHCMC000)	-	○	○	○
	PAHCMS000 (PAHCMM000 + PAHCMC000)	-	○	○	○
Control Kit	PAHCNM000	-	-	-	-

¹⁾ When connecting to Single Split outdoor unit, please check the compatibility to the regional sales office.

For Medium-Large Size Application (~ 672 kW) - MULTI V

TYPE	MODEL	MULTI V					MULTI V WATER		
		i	5	IV	III	S	5	IV	II
Communication Kit (Controller Module)	PAHCMR000 (PAHCMC000)	○	○	○	○	○	○	○	○
	PAHCMS000 (PAHCMM000 + PAHCMC000)	○	○	○	○	○	○	○	○
Control Kit	PAHCNM000	○	○	○	○	○	○	○	○

EEV Kit Compatibility

EEV KIT MODEL	CAPACITY INDEX (kW)		AHU APPLICATION KITS (MAXIMUM CONNECTABLE EEV KITS)			CONNECTION BY ODU SYSTEM		
	MIN.	MAX.	PAHCMR000 (PAHCMC000)	PAHCMS000 (PAHCMM000 + PAHCMC000)	PAHCNM000	MULTI V		SINGLE SPLIT
					HEAT PUMP		HEAT RECOVERY	
PRLK048A0	3.6	28	○ (1)	○ (1)	○ (6)	○	○	-
PRLK096A0	28.1	56	○ (1)	○ (1)	○ (6)	○	○ (Max. 33.7 kW)	-
PRLK396A0	56.1	112	○ (1)	○ (1)	○ (6)	○	-	-
PRLK594A0	112.1	168	-	○ (1)	○ (3)	○	-	-

※ ○ : Applied, - : Not applied

- Table of the outdoor unit compatibility is based on European regional model.
- When connecting outdoor units in other areas, please check whether they are compatible or not.
- Expansion application kit compatibility is based on capacity index of the system, it may be changed according to system design condition.

AHU Kit


Control Kit

Field Supplied Item

LIST	REQUIRED SPECIFICATION	APPLY LOCATION
Temperature / Humidity Sensor	- Power : AC 24 V - Output Signal : DC 0 ~ 10 V - Temperature Range : -40°C ~ 70°C - Humidity Range : 0 ~ 95% RH	Supply Air Duct, Return Air Duct, Outdoor Air Duct
Temperature Sensor	- Power : AC 24 V - Output Signal : DC 0 ~ 10 V - Temperature Range : -50°C ~ 50°C	Supply Air Duct, Return Air duct, Mixed Air Duct
Damper Actuator	- Power : AC 24 V - Input / Output Signal : DC 0 ~ 10 V - Torque : 15 N·m - Operation Time : 150 s - Rotation Angle : 90°	Outdoor Air Damper, Exhaust Air Damper, Mixed Damper
Filter Differential Pressure Sensor	- Power : AC 24 V - Output Signal : DC 0 ~ 10 V - Range : 0 ~ 1,000 Pa - Switch Type : Relay Open / Close	Filter
Static Pressure Sensor	- Power : AC 24 V - Output Signal : DC 0 ~ 10 V - Range : 0 ~ 1,000 Pa	Supply Air Duct
CO ₂ Sensor	- Power : AC 24 V - Output Signal : DC 0 ~ 10 V - Range : 0 ~ 2,000 ppm	Return Air Duct
Smoke Detector	- Power : AC 24 V - Type : Contact	Return Air Duct

Various Control with Control Kit – Multiple MULTI V + EEV Kits

Field Supplied Item

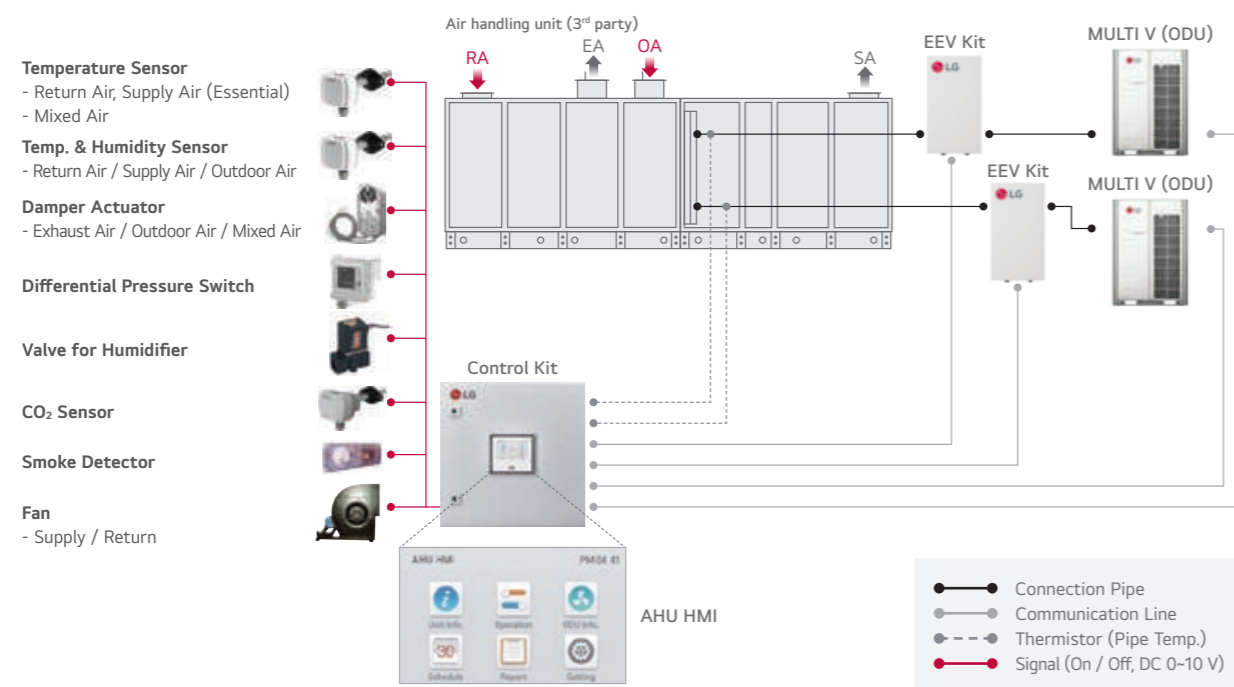

Hotel Control Solution



Guest Room

Air conditioner automatically switches off when guests depart

Integrated control of air conditioner with the hotel room controller

Air conditioner can be controlled with existing hotel thermostat

Prioritizes guest safety with refrigerant leak detection






Reception

Air conditioner control in conjunction with check-in or check out

Public Areas

Centralized management of the public areas

Design Proposal

GUEST ROOM				LOBBY
<p>The air conditioner automatically switches off when guests leave</p>  <p>PDRYCB400 2 contact point</p> <p>Input</p> <ul style="list-style-type: none"> • Operation On / Off <p>Output</p> <ul style="list-style-type: none"> • Operation On / Off status • Error alarm 	<p>Integrated control of air conditioner with the hotel room controller</p>  <p>PDRYCB500 / PDRYCB510 (w/o case)</p> <p>Function</p> <ul style="list-style-type: none"> • Operation • Indoor temperature • Error alarm • Set run mode • Set temperature • Set fan speed 	<p>Control with existing hotel thermostat</p>  <p>PDRYCB320 8 contact point</p> <p>Input</p> <ul style="list-style-type: none"> • Universal Input • Operation On / Off • Thermo On / Off • Operation mode (Fan / Heat / Cool) • Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> • Operation On / Off status • Error alarm 	<p>Guest safety is the first priority</p>  <p>PRLDNVS0 Refrigerant leakage detector</p> <ul style="list-style-type: none"> • 6,000 ppm <p>PREMTB101 Wired remote controller</p> <ul style="list-style-type: none"> • 4.3 inch color LCD • Touch button 	<p>Air conditioner control in conjunction with check-in or check out</p>  <p>PACSSA000 AC Smart 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP) <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP)

Shopping Mall Control Solution



Retail

Proportionally distribute and manage the power consumption by tenants

Real-time system issue detection and alarms

Maintenance Office





Reduces energy usage by checking operational trends

Atrium

Integrated management of AHU applied to large spaces

Chiller and VRF integrated control

Design Proposal

RETAIL	MAINTENANCE OFFICE	ATRIUM	
<p>Proportionally distribute and manage power consumption by tenants.</p>  <p>PPWRDB000 PDI Standard (2 ports)</p> <ul style="list-style-type: none"> • Max. 128 IDU <p>PQNUD1S40 PDI Premium (8 ports)</p> <ul style="list-style-type: none"> • Max. 128 IDU 	<p>Real-time system issue detection and alarms</p>  <p>PACSSA000 AC Smart 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP) <p>PACP5A000 ACP 5</p> <ul style="list-style-type: none"> • BMS Integration (BACnet IP, Modbus TCP) 	<p>Integrated management of AHU applied to large spaces</p>  <p>PAHCMR000 AHU Comm.Kit</p> <ul style="list-style-type: none"> • Return air <p>PAHCS000 AHU Comm.Kit</p> <ul style="list-style-type: none"> • Discharge air 	<p>Chiller and VRF integrated control</p>  <p>PACPSA000 ACP 5</p> <p>PACSSA000 AC Smart 5</p>

Hospital Control Solution

Hospital Ward
 Proper airflow management for patients
 Monitor the comfort level for each hospital ward
 Control fan speed and air volume

Service Zone
 Energy savings based on flexible scheduling

Lobby
 Centralized management of AHU for large spaces

Design Proposal

HOSPITAL WARD			SERVICE ZONE	LOBBY
Proper airflow management for patients	Monitor the comfort level for each hospital ward	External device interlock control	Energy savings based on flexible scheduling	Centralized management of AHU for large space
PTVSM A0 Human detection sensor	PACS5A000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	PDRYCB400 2 contact point Input • Operation On / Off Output • Operation On / Off status • Error alarm	PACS5A000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	PAHCMR000 AHU Comm.Kit • Return air
PREMTB101 Wired remote controller • 4.3 inch color LCD • Touch button	PACP5A000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)		PACP5A000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)	PAHCM S000 AHU Comm.Kit • Discharge air

Academic Institution Control Solution

Class Room
 Automatically save energy in the absence of students
 Central controls prevent students from arbitrary control

Lecture Hall
 Schedule management according to academic plan

Maintenance Office
 Integrated management of distributed buildings
 Centralized management with multiple interfaces

Design Proposal

CLASS ROOM	LECTURE HALL	MAINTENANCE OFFICE	
Automatically save energy in the absence of students	Central controls prevent students from arbitrary control	Integrated management of distributed buildings	Centralized management with multiple interfaces
PTVSM A0 Human detection sensor	PACP5A000 ACP 5 • BMS Integration (BACnet IP, Modbus TCP)	PACS5A000 AC Smart 5 • BMS Integration (BACnet IP, Modbus TCP)	PACM5A000 AC Manager 5
PREMTB101 Wired remote controller • 4.3 inch color LCD • Touch button			

Office Control Solution

Maintenance Office
Energy savings and management throughout the building

Integrated management of HVAC with BMS system

Reduce costs by replacing BMS

Office Room
Reasonable power distribution to tenants

Server Room
24-hour backup management

Meeting Room
Energy savings based on occupancy detection

Design Proposal

MAINTENANCE OFFICE	OFFICE ROOM	SERVER ROOM	MEETING ROOM
<p>Energy savings and management throughout the building</p> <p>PAC5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) <p>PAC5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>Integrated management of HVAC with BMS system</p> <p>PPWRDB000 PDI Standard (2 ports)</p> <ul style="list-style-type: none"> Max. 128 IDU <p>PQNUD1S40 PDI Premium (8 ports)</p> <ul style="list-style-type: none"> Max. 128 IDU 	<p>Reduce costs by replacing BMS</p> <p>PAC5A000 AC Smart 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) <p>PAC5A000 ACP 5</p> <ul style="list-style-type: none"> BMS Integration (BACnet IP, Modbus TCP) 	<p>Reasonable power distribution to tenants</p> <p>PTV5MA0 Human detection sensor</p> <p>PREMTB101 Wired remote controller</p> <ul style="list-style-type: none"> 4.3 inch color LCD Touch button

Residential Control Solution

Home
Control your home air conditioner anytime, anywhere.

Integrated systems for smart connectivity.

Bed Room
Use a familiar residential thermostat

Simple interlocking control by remote control

Apartment / Residence
Stable system operation

Design Proposal

HOME	BED ROOM	APARTMENT
<p>Control your home air conditioner anytime, anywhere</p> <p>PWFMD200 Wi-Fi modem</p> <p>Function</p> <ul style="list-style-type: none"> On / Off Fan speed Operation mode Vane control Reservation (Sleep, Weekly On / Off) Error check 	<p>Proportionally distribute and manage power consumption by tenants.</p> <p>PDRYCB500 Modbus RTU (9,600bps)</p> <p>Function</p> <ul style="list-style-type: none"> Operation Indoor temperature Error alarm Set operation mode Set temperature Set fan speed 	<p>Use a familiar residential thermostat</p> <p>PDRYCB320 8 contact point</p> <p>Input</p> <ul style="list-style-type: none"> Universal Input Operation On / Off Thermo On / Off Operation mode (Fan / Heat / Cool) Fan speed (Low / Middle / High) <p>Output</p> <ul style="list-style-type: none"> Operation On / Off status Error alarm

ACCESSORIES

236 ~ 259

MECHANICAL ACCESSORIES

PIPING ACCESSORIES



Dual Vane Cassette Panel



Model Name
PT-AAGW0
PT-AFGW0

Key Features

Model	Function				
	Dual Vane	Wi-Fi	Floor Temperature Sensor	Air Purification	Human Detection Sensor
PT-AAGW0	○	Optional	Optional	X	Optional
PT-AFGW0	○	Optional	Optional	Optional (Dust Sensor, Tact Switch)	Optional

Specification


Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)		
					W	H	D
PT-AAGW0	Grid	White (RAL 9003)	-	7.1	950	35	950
PT-AFGW0	Grid	White (RAL 9003)	-	7.5	950	35	950

Air Purification Kit

Model	Type	Image	Model Name	Dielectric Dust Collecting Filter	Photocatalytic Deodorizing Filter	HVPS	Ionizer
Air Purification Kit	4 Way		PTAHMPO		○	○	○
	1 Way		PTAHTPO		○	○	○
	Round		PTAHYPO		○	○	X

Human Detection Kit

Human Detection Kit promote energy saving and controls wind direction.

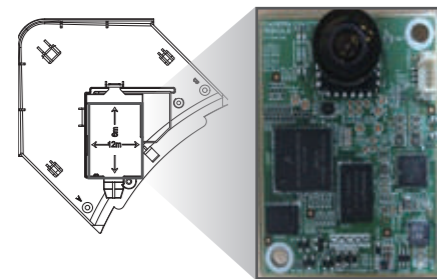

Model Name
PTVMA0

Applied Products

PT-AAGW0
(For Dual Vane Cassette Panel)
PT-AFGW0
(For Dual Vane Cassette Panel)

Key Features

- Human Detection Control provides two functions. 'Saving Operation' for energy savings and 'Wind Direction Operation' for comfort.
- Detection Range : ~ height 4.2 m
- Installation Height 2.7 m → Detection area 12 m x 6 m
- Installation Height 3.2 m → Detection area 15 m x 8 m
- Installation Height 4.2 m → Detection area 18 m x 9 m

Other Cassette Panel

The Independent Vane Operation regulate the air flow in the environment.



Model Name & Applied Products

4 Way Cassette (Mini, 570 x 570)
PT-QAGW0

2 Way Cassette

PT-USC

1 Way Cassette (Grill Type)

PT-UAHGO / PT-TAHGO (Glossy)
PT-UAHW0 / PT-TAHW0 (Non-Glossy)

1 Way Cassette (Air Purification)

PT-UPHGO / PT-TPHGO (Glossy)

Compact and Stylish Design

- Mini 4 way cassette panel adapted unibody shape and matching with into the ceiling.
- Panel size is fit into the ceiling tile.



Key Features


- Independent vane operation uses separate motors, making it possible to control all 1, 2, and 4 vanes independently.
- The detachable corner design makes it easy to adjust the hanger during installation and to check for leakages in the drain pipe and refrigerant pipes.

Specification

Model	Suction Type	Color (RAL)	Gloss	Weight (kg)	Dimension (mm)			Applied Model Capacity (kW)*						
					W	H	D	Single Split		Multi Split		MULTI V		
									R32	R410A	R32	R410A	R32	R410A
4 Way	PT-QAGW0	Grid	White (RAL 9003)	X	2.9	620	35	620	2.5-5.0	2.5-5.0	1.5-5.3	1.5-5.3	1.6-6.2	1.6-6.2
2 Way	PT-USC	Grid	Morning Fog (RAL 9001)	X	4.7	1,100	28	690					2.8-7.1	2.8-7.1
1 Way	PT-UAHGO	Grill	White (RAL 9003)	○	3.9	1,160	34	500			2.6-3.5	2.6-3.5	2.2-3.6	2.2-3.6
	PT-TAHGO	Grill	White (RAL 9003)	○	4.8	1,480	34	500					5.6-7.1	5.6-7.1
	PT-UAHW0	Grill	White (RAL 9003)	X	3.3	1,100	34	500			2.6-3.5	2.6-3.5	2.2-3.6	2.2-3.6
	PT-TAHW0	Grill	White (RAL 9003)	X	4.5	1,420	34	500					5.6-7.1	5.6-7.1
	PT-UPHGO	Grill	White (RAL 9003)	○	4.1	1,160	34	500			2.6-3.5	2.6-3.5	2.2-3.6	2.2-3.6
	PT-TPHGO	Grill	White (RAL 9003)	○	4.9	1,480	34	500					5.6-7.1	5.6-7.1

* Based on cooling capacity
※ ○ : Applied, - : Not applied

Cassette Cover

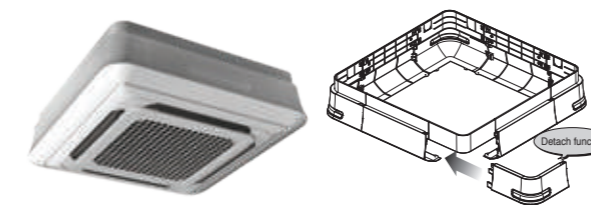

Model Name


PTDCA

Applied Products

4 Way Cassette (for chassis TP-B, TM-A)

Included Parts

- Cover A, Cover B
- Cover C, Cover D
- Screws
- Installation Manual

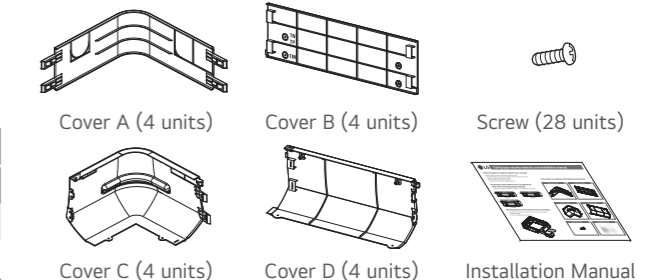

Key Features

- Specially designed for indoor unit
- Gives elegant looks
- Covers the side area of cassette
- Light weight

Specification

Model	Front Panel		Weight (kg)		Dimensions (mm)		
	NET	Gross	W	H	D		
PTDCA	PT-AAGW0 / PT-AFGW0	TP-B	6.1	9.5	1,157	266	1,157
		TM-A	6.1	9.5	1,157	308	1,157

Refrigerant Leakage Detector

R410A refrigerant leakage detector.



Model Name
PRLDNV50

Applied Products

- MULTI V i
- MULTI V 5
- MULTI V IV Heat Pump & Heat Recovery
- MULTI V Water 5

Key Features

- This detector senses refrigerant leakage when the refrigerant concentration exceeds 6,000 ppm. (The green and red LED lights blink simultaneously.)
- Alarm is "on" when refrigerant leaks out more than 6,000 ppm for 5 seconds. If it is reduced less than 6,000 ppm for 5 seconds, alarm is "off".
- When the alarm of the refrigerant leak detector is switched on the user must ventilate the room until the alarm is disabled.
- The detector has to be installed inside the room and it should be installed 300 ~ 500 mm above the floor.


Specification

Parts	Specification	
Sensor	Rated Voltage (V)	DC 5.0 ± 5%
	Dimensions (W x H x D, mm)	31 x 44 x 20
	Weight (g)	22
	Detectable Refrigerant	R410A
	Detected Concentration (ppm)	0 / 6,000 Alarm Off / On
	Operating Temperature Range (oC)	-10 ~ 50
	Preserved Temperature Range (oC)	-40 ~ 60
Connecting Cable	Average Power Consumption (mA)	35
	Cable Length (m)	10
Sensor Protective Cover	Dimensions of Front Plate (W x H x D, mm)	80 x 110 x 44.6
	Dimension of Backplate (W x H x D, mm)	80 x 110 x 6.5


※ This function available for ARU***L*5 and 4 (MULTI V i, MULTI V 5, MULTI V IV H/P, H/R model)

Key Application

Refrigerant Leakage Detector has three application methods.

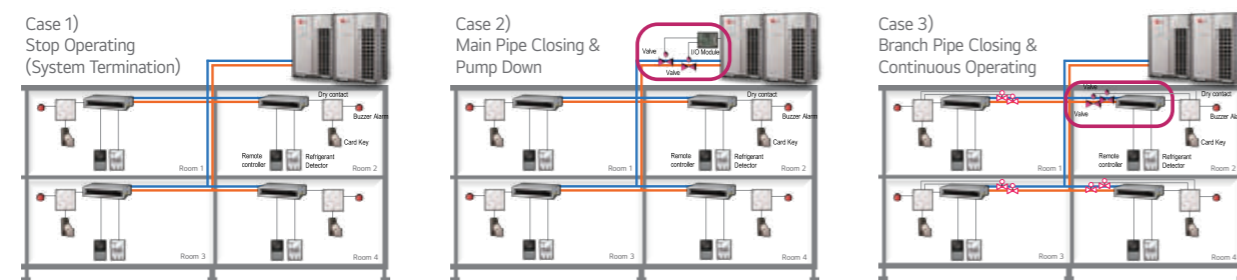

Accessory Specification (To realize the case 2 application)

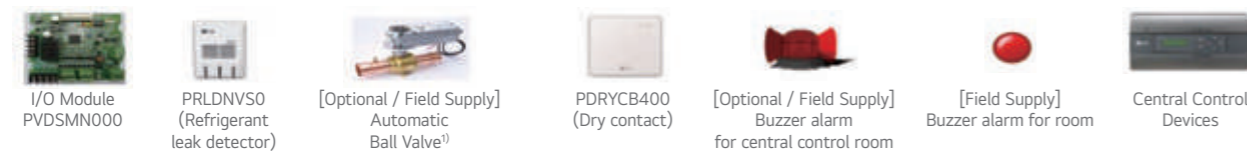

※ Necessary accessory
1) Please contact to subsidiary to get the recommended specification. (LG Electronic don't provide this accessory)

CO₂ Sensor

CO₂ sensor in ventilation system.



Model Name
AHCS100H0

Applied Products

- LZ-H025GBA4
- LZ-H035GBA5 / LZ-H050GBA5
- LZ-H080GBA5 / LZ-H100GBA5
- LZ-H150GBA5 / LZ-H200GBA5

Applicable Products

- LZ-H050GXN0 / LZ-H080GXN0
- LZ-H100GXN0 / LZ-H050GXH0
- LZ-H080GXH0 / LZ-H100GXH0

Key Features


Specification

- Applied Model : ERV (Embedded), ERV DX (Option)
- Supply voltage : DV 12 V ± 5%
- Output : 0.6 ~ 4.4 V (Linear output, 240 ~ 1,760 ppm CO₂)
- Accuracy : ± 10% (2 days after installation)


Description

- The product is especially designed to detect CO₂.
- This model requires Standard III Wired Remote Controller for display.

Key Application

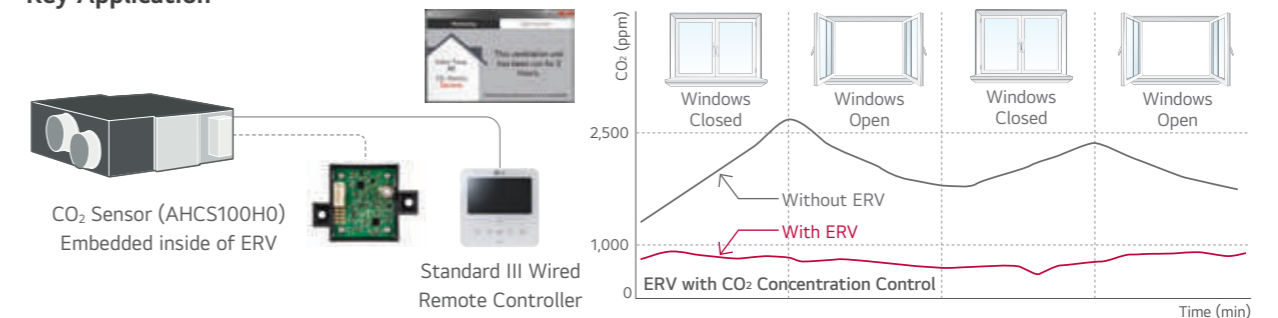


Dimensions (Unit : mm)

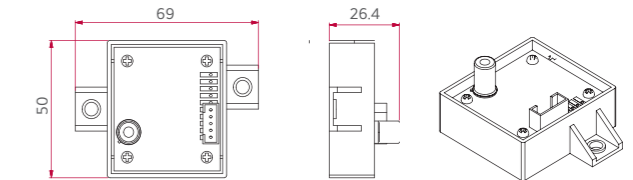

How to Install

- Remove a screw on the service cover. Pull the service cover fixing bracket (1), then remove the service cover (2). Remove two elements (3) and two air filters (4).
 - Install the sensor with two screws.
 - Remove a screw, then remove the right side of element rail (5).
 - Press the holder (6) into the hole to fix the CO₂ sensor cable (7).
 - Connect the wire terminal to the CN-CO₂ port of PCB.
- ※ Airflow can be controlled by concentration of CO₂, after setting automatic operation mode at remote controller.
 ※ Use the screwdriver whose total length is less than 250 mm.

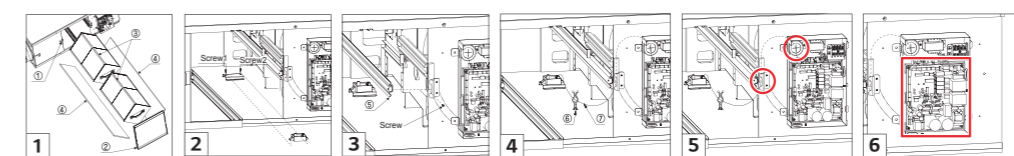

IR Receiver

IR Receiver can be connected to ceiling concealed duct and floor standing unit.



Model Name
PWLRVN000

Applied Products
MULTI V Indoors (Ceiling Concealed Duct, Floor Standing Units)

Key Features

- Designed for wireless control
- Indication lamps (3 colors) and Self-diagnosis function


Key Application

Note : Do not install both the IR Receiver and Wired Remote Controller. This may cause malfunctions.




Operation of Indication Lamps

- ① Emergency Operation button : Turns the indoor unit on or off when remote controller is not working.
- ② Signal Detector : Receives the signal from remote controller.
- ③ Timer lamp (Green) : Lights up during the timer operation.
- ④ Hotstart lamp (Orange) : Lights up during the pre-heating operation, defrost operation as well as latent heat removal operation in heat mode. Available only for the heat pump models, not cooling only models.
- ⑤ System On / Off lamp (Red) : Lights up during system controller operation.
- ⑥ Filter Sign lamp (Green) : Lights up after 2,400 hours from the time of first power on operation.



Test Run Mode

After installing the product, you must run a Test Run mode. Press the Emergency Operation button for 5 seconds, until the LED flickers. Then the indoor unit, duct runs cooling mode for 18 minutes, where the setting temperature is 18°C and the fan speed is high.



EEV KIT (for Indoor Unit)

MULTI V EEV KIT is specially designed to reduce noise and comfortable environment.




Model Name
PRGK024A0

Key Features

- Decreasing noise level of MULTI V Indoor units.

Key Application

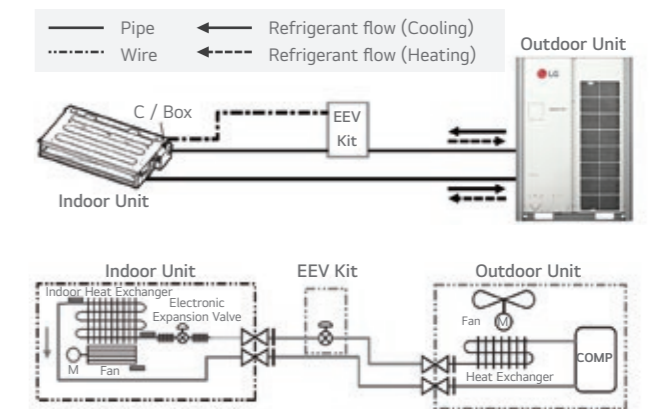

Applied Products


Indoor Unit	Model	Chassis	Applicable
Cassette	1 Way Cassette	TU	○
	2 Way Cassette	TT	N/A
		TS	○ (-5.6 kW)
	4 Way Cassette	TR	○
		TQ	○ (-4.5 kW)
		TP	N/A
TN		N/A	
Duct		TM	-
	High Sensible	BG	-
		BR	-
	High Static	B8	-
	Middle Static	M1	○ (-5.6 kW)
		M2	-
		M3	-
	Low Static	L1	○
		L2	-
		L3	-
Etc	Floor Standing	CE	○
	Convertible	CF	-
	Ceiling Suspended	VE	○
		V1	-
	Wall Mounted	V2	-
		SJ	○
SK		○	
SV		-	
SF		○	
Art Cool Console	QA	○	
Hydro Kit	K2	-	
	K3	-	

※ ○ : Applied, - : Not applied, N/A : Not Applicable


How to Install

Open Indoor unit's control box cover.

1. Open fully indoor unit's EEV through vacuum mode of ODU setting.
2. Detach the Indoor unit's EEV connector from PCB and then push the reset button of Outdoor unit's PCB.
3. After connecting indoor unit's EEV CONNECTOR, repeat the process 1 & 2. Then, connect the EEV CONNECTOR of EEV KIT in PCB of indoor unit.
4. Finally connect the lead wire of the EEV Kit to the indoor unit's PCB.
5. Assemble the control box cover.

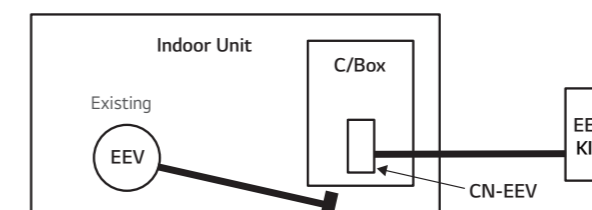

EEV Kit is good for quiet environment and noise sensitive space.

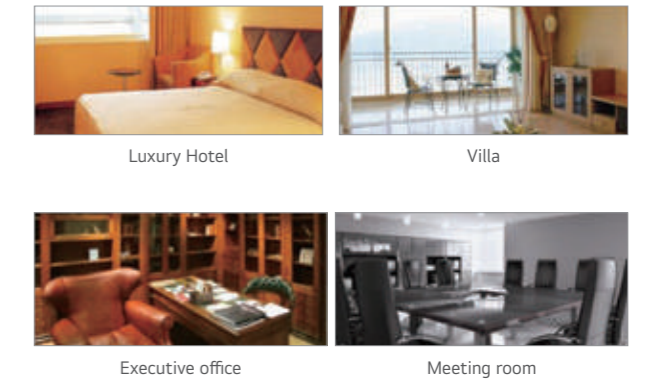

※ If you don't use EEV of same specification, Cooling (Heating) capacity could be decreased.

Multi-tenant Power Module

System operation is stable when indoor unit power is lost.




Model Name
PINPMB001

Applied Products
MULTI V Indoor Units

- Key Features**
- Multi-tenant site IDUs are powered separately. In this case, system operation is not stable without Multi-tenant Power Module.
 - This module power each EEV for stabilizing system operation.

Installation Scene

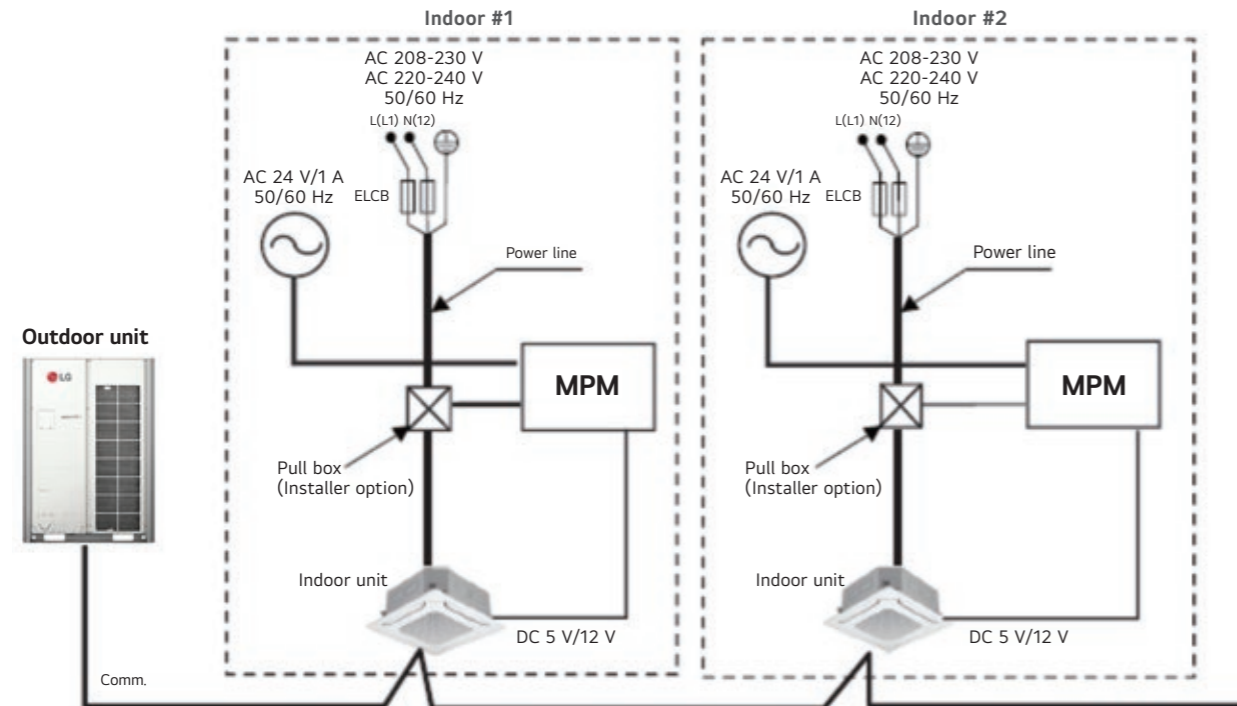

※ When Multi-tenant Power Module is adopted, CN-EXT must be used for it. Instead of being used CN-EXT, PDRYCB000 (220 Vac input) / PDRYCB100 (24 Vac Input) Module are being used for Single contact.

Auxiliary Heater Relay Kit

Providing an efficient way to add auxiliary heat.



Model Name
PRARS1

Applied Products
Wall Mounted, Art Cool Mirror, Art Cool Gallery

Model Name
PRARH1

Applied Products
1, 2, 4 Way Ceiling Cassette, High Static Ducted, Low Static Ducted, Ceiling Suspended


- Key Features**
- Provides two stages of auxiliary heat for indoor unit.
 - Provides ability to use the two stage auxiliary heater as the primary or secondary heating source.

Included Parts


Model	PRARH1			
Item	Auxiliary Heater Relay Kit	Screw	Insulation	Installation Manual
Q'ty	1	2	2	1
Figure				

Model	PRARS1			
Item	Auxiliary Heater Relay Kit	Screw	Insulation	Installation Manual
Q'ty	1	2	2	1
Figure				

Key Application

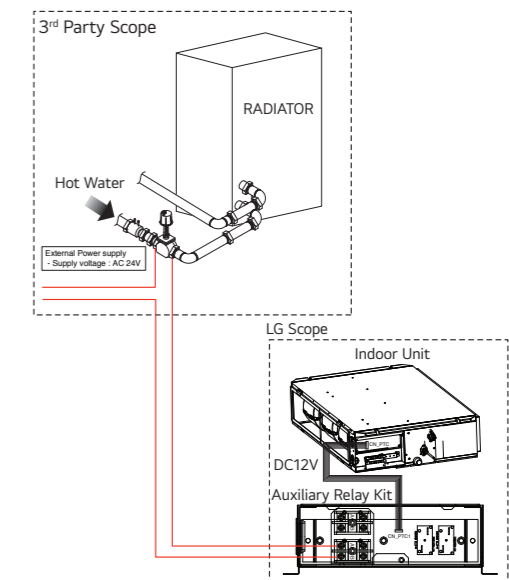


How to Install

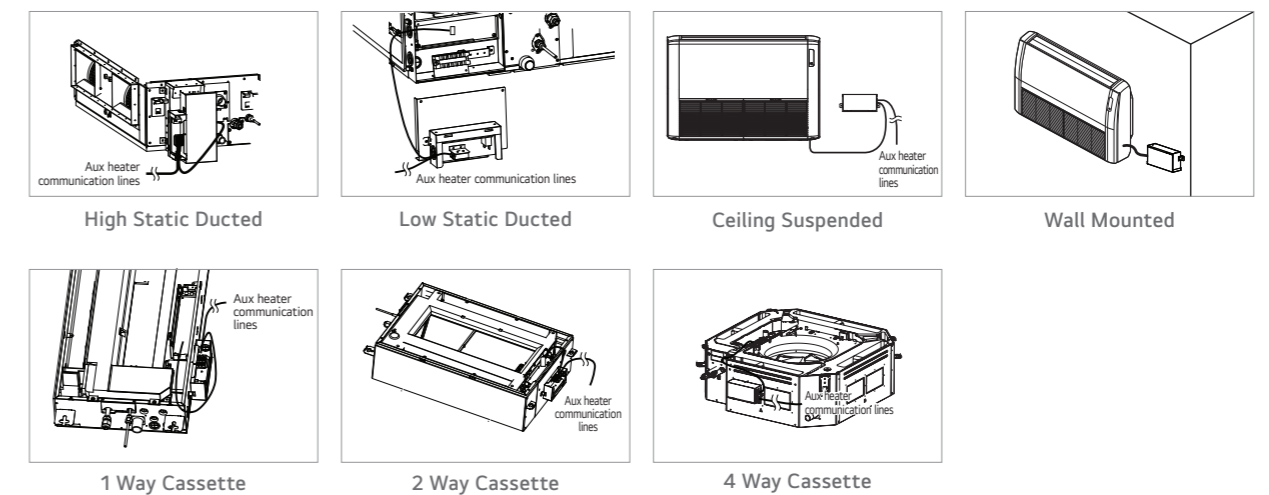

Y Branch and Header Branch

Usage

For refrigerant piping connection (ODU-ODU, ODU-IDUs)

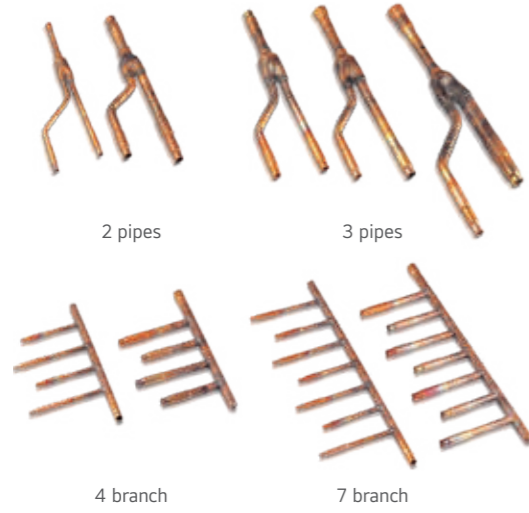

Applied Products

Refer to Specification Table

- 1) Y Branch for ODUs, H/R Box Connection (C/O & H/P, H/R)
- 2) Y Branch for Branch Pipe & IDUs Connection (C/O & H/P, H/R)
- 3) Header Branch for IDUs Connection (C/O & H/P)

Applied Products


- MULTI V i
- MULTI V C/O, H/P, H/R
- MULTI V S
- MULTI V Water

Key Features


- Various Y Branch pipe of different capacities make MULTI V installation much easier.
- Y Branch and header branch for both gas and liquid are provided.
- Insulation material is also provided for covering the branches.

Key Application

Cooling Only (C/O), Heat Pump (H/P) System

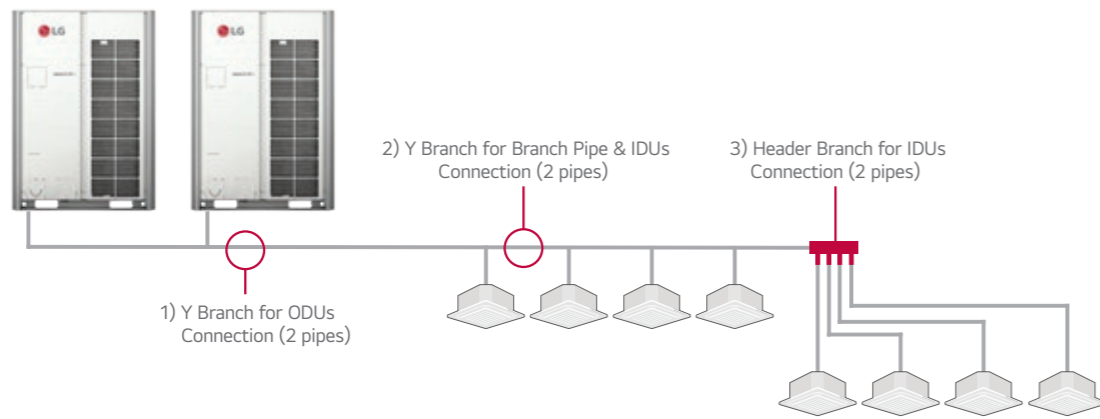

Heat Recovery System

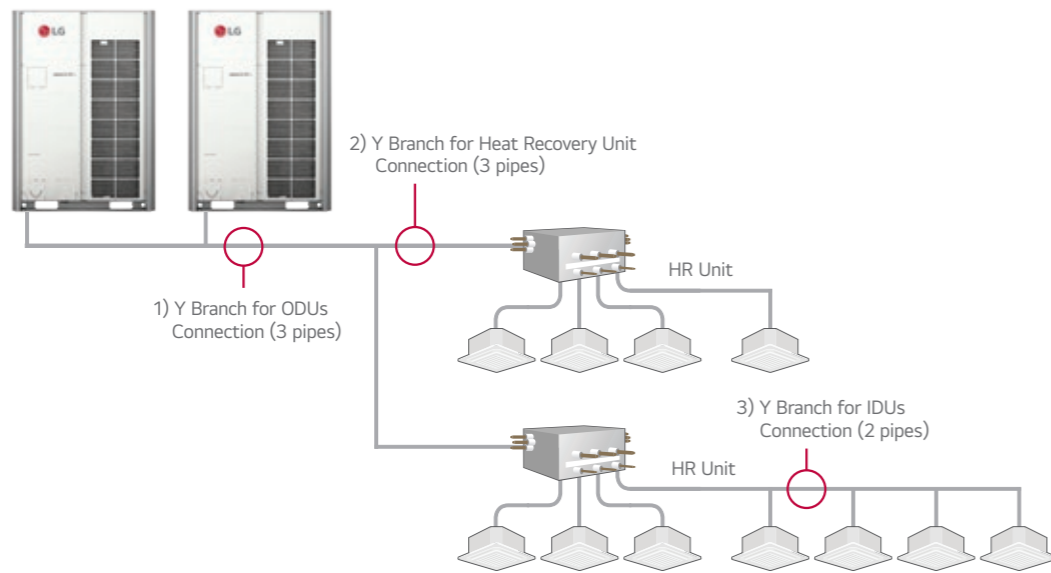

1) Y Branch for ODUs Connection (2 pipes)

(Unit : mm)

Model	High Pressure Gas Pipe	Liquid Pipe
ARCNN21		
ARCNN31		
ARCNN41		

2) Y Branch for ODUs Connection (3 pipes)

(Unit : mm)

Model	High Pressure Gas Pipe	Liquid Pipe	Low Pressure Gas pipe
ARCNB21			
ARCNB31			
ARCNB41			

3) Y Branch for Branch Pipe & IDUs Connection (2 pipes)

(Unit : mm)


Model	Gas Pipe	Liquid Pipe
ARBLN01621		
ARBLN03321		
ARBLN07121		
ARBLN14521		
ARBLN23220		

4) Y Branch for Branch Pipe & IDUs Connection (3 pipes)

(Unit : mm)

Model	High Pressure Gas Pipe	Liquid Pipe	Low Pressure Gas Pipe
ARBLB01621			
ARBLB03321			
ARBLB07121			
ARBLB14521			
ARBLB23220			

Heat Recovery

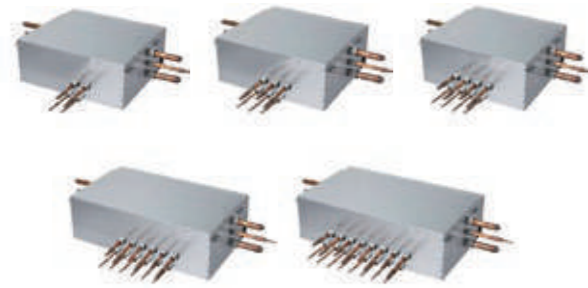

Model Name

- PRHR023 (2 Branch Unit)
- PRHR033 (3 Branch Unit)
- PRHR043 (4 Branch Unit)
- PRHR063 (6 Branch Unit)
- PRHR083 (8 Branch Unit)

Applied Products


- MULTI V i
- MULTI V 5
- MULTI V IV
- MULTI V Water 5

Key Features

- Max. 64 IDUs connection is available.
- Easy to Install with Auto Piping Detection & Searching Function.
- Sub-cooling Circuit in HR unit make system efficient.


Connection Capacity

Maximum number of connectable indoor units :
64 IDUs / HR unit (in case of 8 ports model)

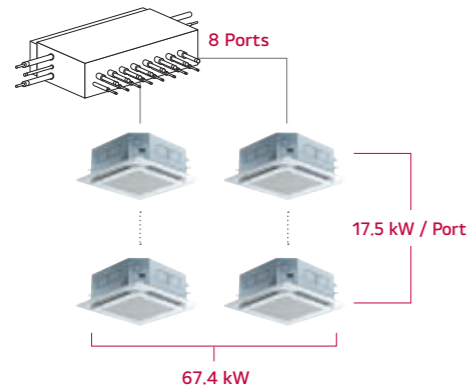


Flexible Connection

Series connection can be installed without pipes crossing.

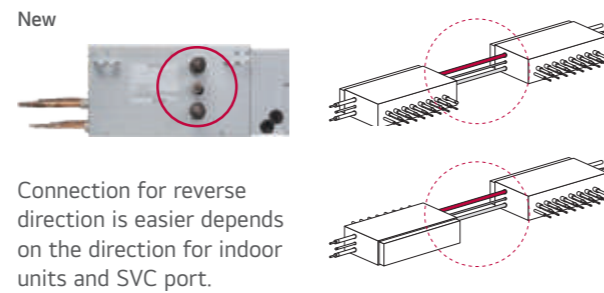

Connection for reverse direction is easier depends on the direction for indoor units and SVC port.

Reduce Noise

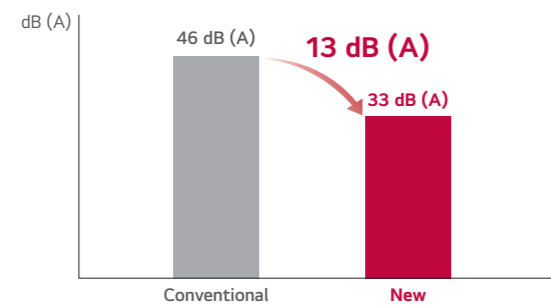

Test Condition (ISO Standard)
 - Temp.: (Cooling) 27°C DB / 19°C WB, 35°C DB / 24°C WB
 (Heating) 20°C DB / 15°C WB, 7°C DB / 6°C WB
 - Operating: cooling → heating switching operation

Included Parts

- HR unit (1 EA)
- Hanging bolts M10 or M8 (4 EA)
- Nut M8 or M10 (8 EA)
- Washers M10 (8 EA)
- Reducers

Specification

Model		PRHR023	PRHR033	PRHR043	PRHR063	PRHR083		
Number of Branch	EA	2	3	4	6	8		
Maximum Connectable Capacity of Indoor Units (Per branch / Unit)	kW	17.5 / 35	17.5 / 52.5	17.5 / 67.4	17.5 / 67.4	17.5 / 67.4		
Maximum Number of Connectable Indoor Units Per Branch	EA	8	8	8	8	8		
Nominal Input	Cooling	kW	0.040	0.040	0.040	0.076	0.076	
	Heating	kW	0.038	0.038	0.038	0.072	0.072	
Net. Weight	kg	18.5	20.3	22.0	28.3	31.8		
Dimensions (W x H x D)	mm	786 x 218 x 657	786 x 218 x 657	786 x 218 x 657	1,113 x 218 x 657	1,113 x 218 x 657		
Piping Connections	Indoor Unit	Liquid	mm (inch)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)	9.52 (3/8)
		Gas	mm (inch)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
	Outdoor Unit	Liquid	mm (inch)	9.52 (3/8)	12.7 (1/2)	15.88 (5/8)	15.88 (5/8)	15.88 (5/8)
		Low Pressure	mm (inch)	22.2 (7/8)	28.58 (11/8)	28.58 (11/8)	28.58 (11/8)	28.58 (11/8)
			High Pressure	mm (inch)	19.05 (3/4)	22.2 (7/8)	22.2 (7/8)	22.2 (7/8)
		Power Supply	∅ / V / Hz	1, 220 - 240, 50 1, 220, 60	1, 220 - 240, 50 1, 220, 60	1, 220 - 240, 50 1, 220, 60	1, 220 - 240, 50 1, 220, 60	1, 220 - 240, 50 1, 220, 60

Reducers for Indoor Unit and HR Unit

(Unit : mm)

Model		Liquid	High Pressure	Low Pressure
Indoor Unit Reducer				
HR Unit Reducer	PRHR023			
	PRHR033 PRHR043 PRHR063 PRHR083			

Stopper Valves



Model Name
 PRVT120 (Under 12.7 mm)
 PMVT780 (Under 22.2 mm)
 PMVT980 (Under 28.58 mm)

Key Features

- This unit can be applied for the additional indoor unit's installation.
- This unit can be applied for each indoor unit's service.

Specification

Model	Specification
PRVT120	
PRVT780	
PRVT980	


How to Install

1. Cut the inlet side of the connector, and weld the pipe.
 2. If installing additional indoor units, the outlet side connector should be cut according to installation pipe.
 3. When installing a stopper valve, the flare part should be facing towards additional indoor unit.
 4. When installing an additional indoor unit, the SVC valve should be in closed state.
-


※ When welding, service valve should be wrapped by wet cloth.

Application

(Room 3 & 4 : in use / Room 1 & 2 : need to install indoor units)

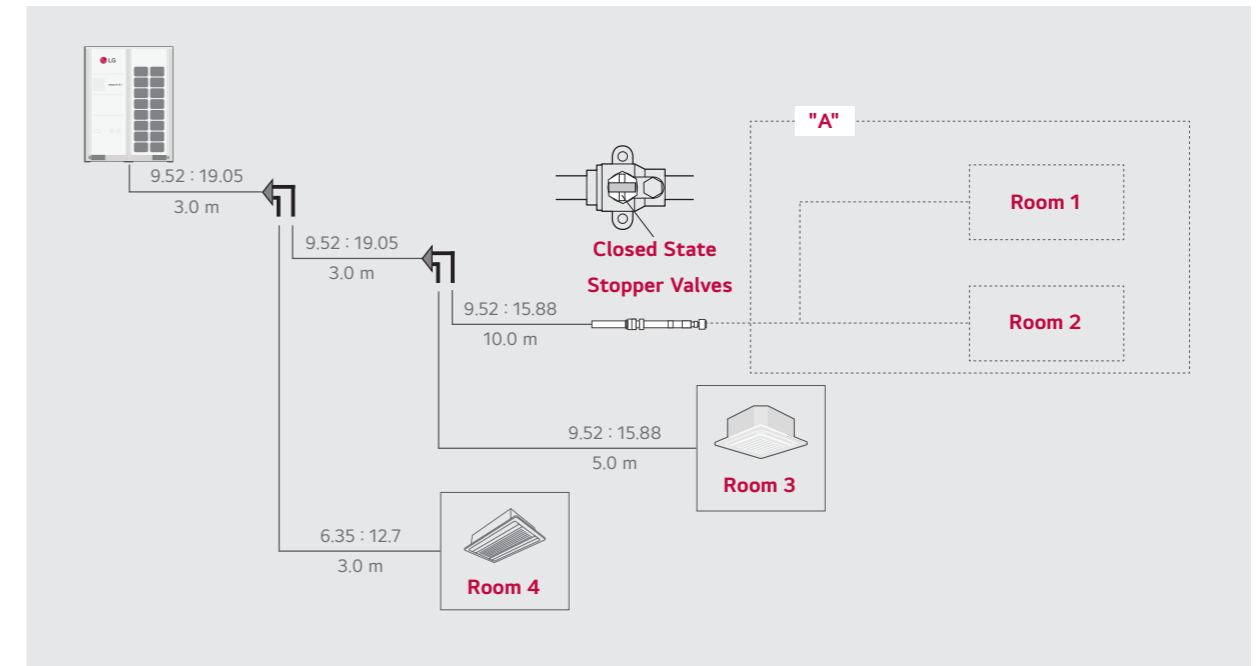

- In case of installation of additional indoor unit, refrigerant of used indoor unit must be discharged. (Room 3 & Room 4)
- If stopper valve is already installed, you can install additional indoor unit without refrigerant loss from the entire system.
- After installation of additional indoor unit, you just need refrigerant charging for "A" section.
- Then, open the Stopper Valve.

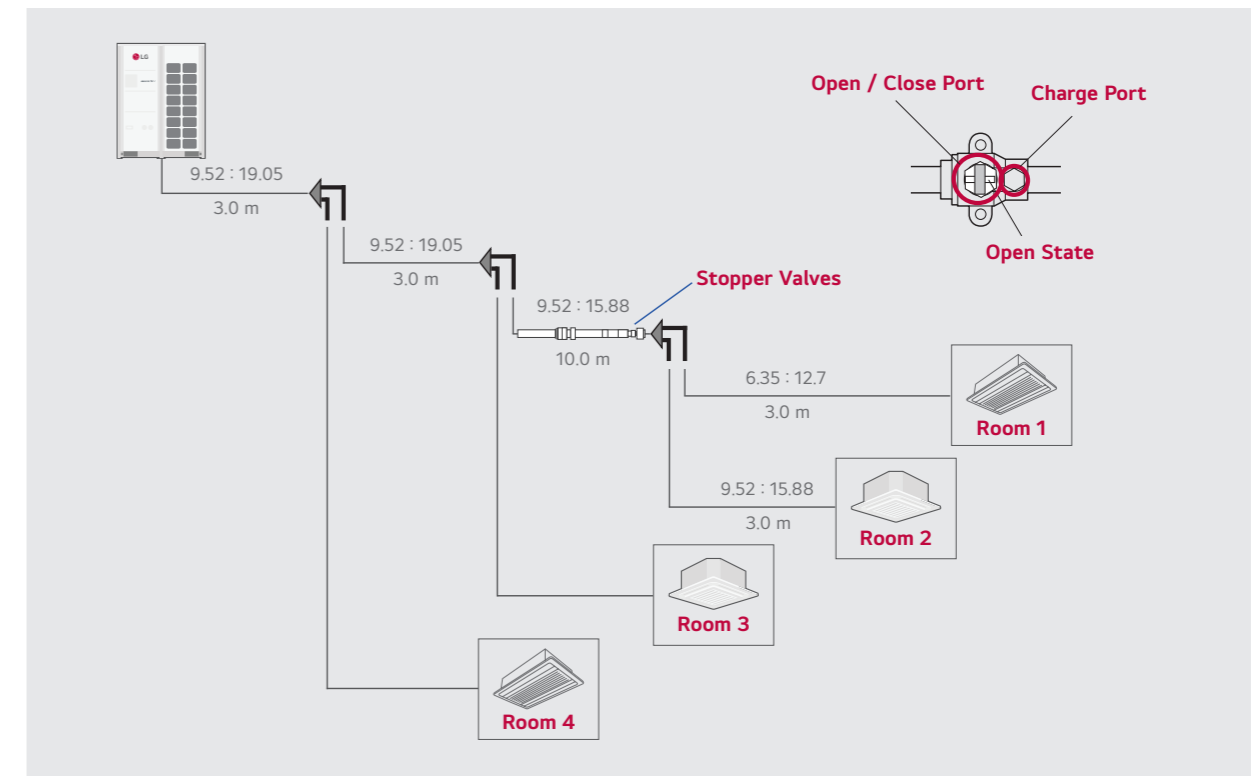

Refrigerant Charging Kit

Recharging refrigerant after a pump down or when refrigerant is either insufficient or excessive.




Model Name
PRAC1

Applied Products
MULTI V i
MULTI V 5
MULTI V IV Heat Pump
MULTI V IV Heat Recovery
MULTI V III Heat Pump
MULTI V III Heat Recovery
MULTI V PLUS II
MULTI V SYNC II

How to Use


1. Arrange manifold, capillary assembly, refrigerant vessel and scale.
2. Connect manifold to the gas pipe service valve of outdoor unit as shown in the figure.
3. Connect manifold and capillary tube. Use designated capillary assembly only.
If designated capillary assembly isn't used, the system may get damaged.
4. Connect capillary and refrigerant vessel
5. Purge hose and manifold
6. After "568" is displayed, open the valve and charge the refrigerant.

Key Application

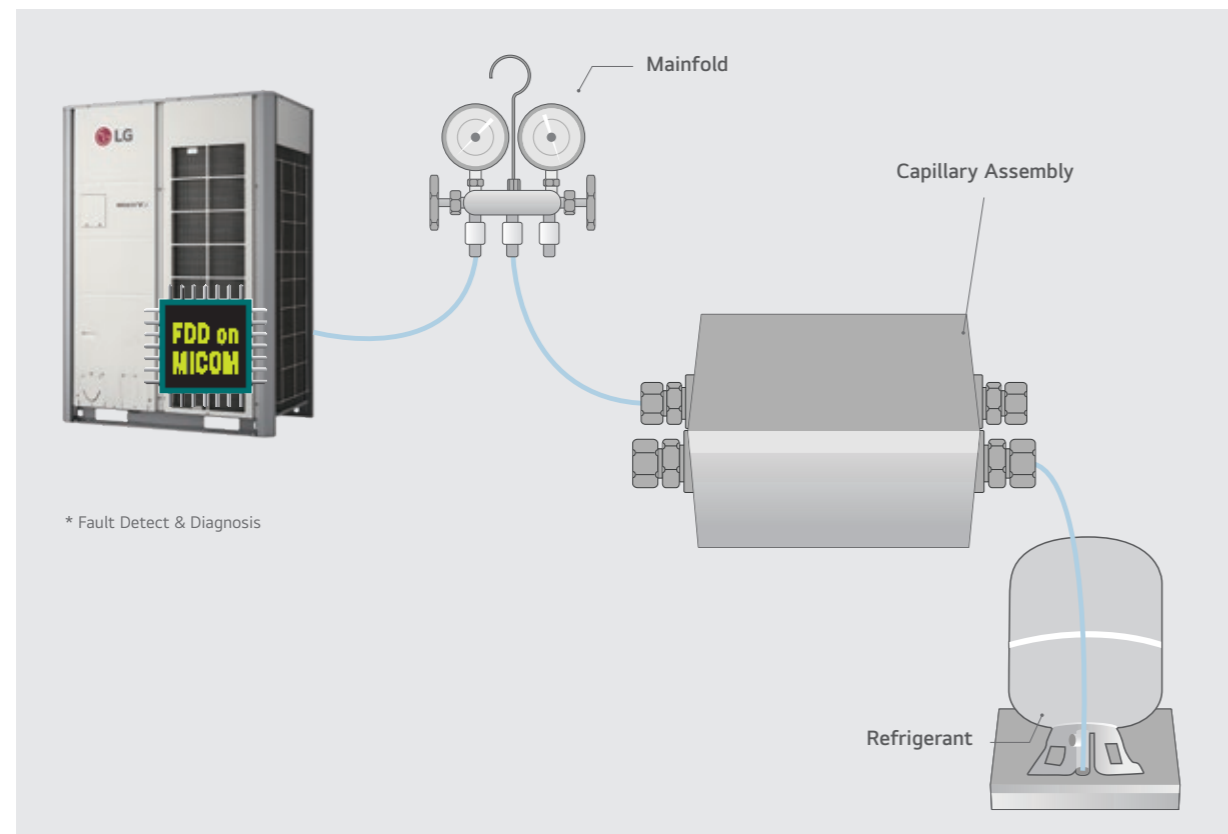

Drain Hose

Easy drain installation.

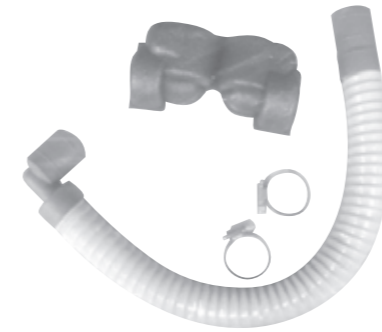

Model Name
PHDHA05T
PHDHA07T
PHDHA05B
PHDHA07B


Applied Products
MULTI V Indoor units

Key Features

- It reduces the installation time by over 40% with elbow-less drain hose.
- Drain pump covers maximum 700 mm high, featuring easy piping installation.

Key Application

- Ceiling Mounted Cassette and Ceiling Concealed Duct. (Refer to PDB for applicable model)

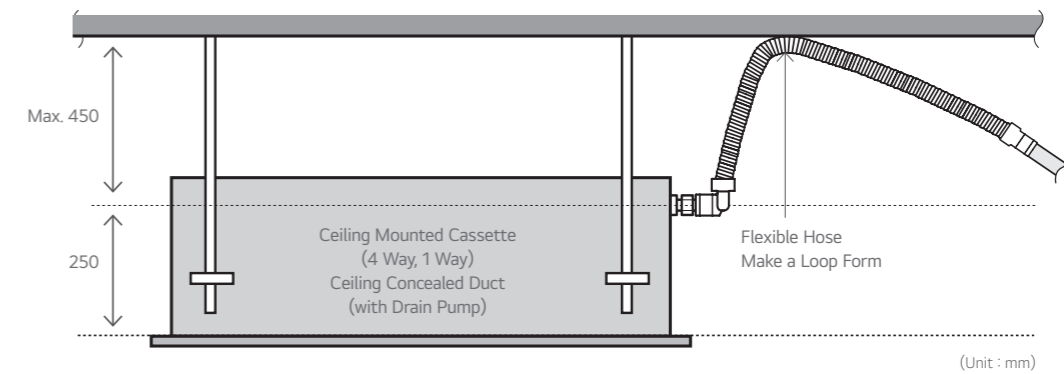

Specification

Model	Length	Quantity
PHDHA05T	500 mm	30 EA
PHDHA07T	700 mm	30 EA
PHDHA05B	500 mm	5 EA
PHDHA07B	700 mm	5 EA