




LG ThinQ SEAMLESS CONNECTIVITY

LG ThinQ allows users to monitor and control compatible LG products remotely, so they can set the temperature and regulate the use of their THERMA V anytime, anywhere. LG ThinQ technology also works with voice activation with Google Home.




SEASONAL AUTO MODE

In this mode, the target temperature will vary according to the outdoor temperature automatically. This mode adds the cooling season function to the conventional weather dependent operation mode. Moreover, this function can be conveniently set using visualized graphics.

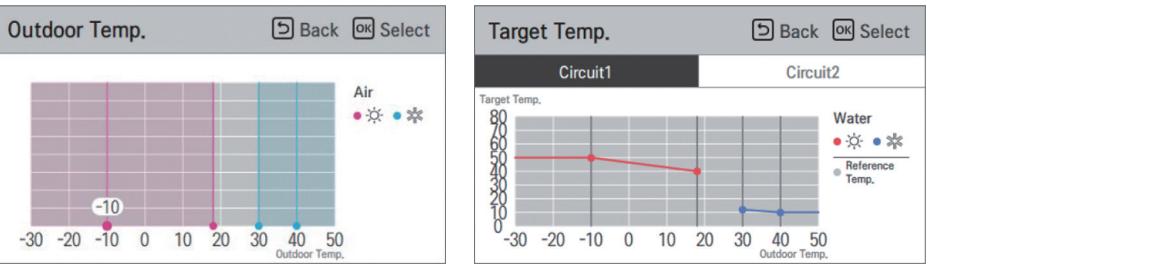


WATER CIRCUIT MONITORING

It is possible to monitor via remote controller not only temperature of water circuit but also flow rate and pressure. This information is not only useful to the installer during installation, but also helps to periodically clean the strainer.

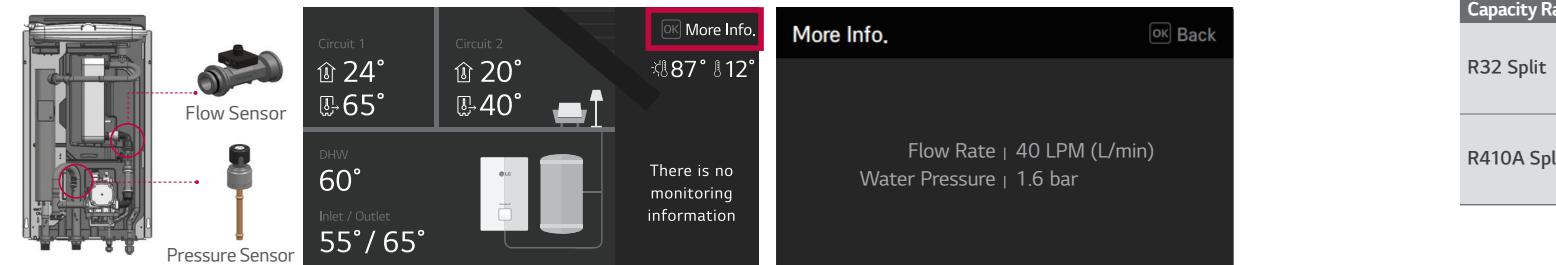

ADVANCED PUMP CONTROL OPTIONS

Various pump control options are possible for the user's convenience. With the R32 Split & R410A Split, the water flow rate can be changed as per heat load condition, therefore it makes more energy efficient operation during low load condition.

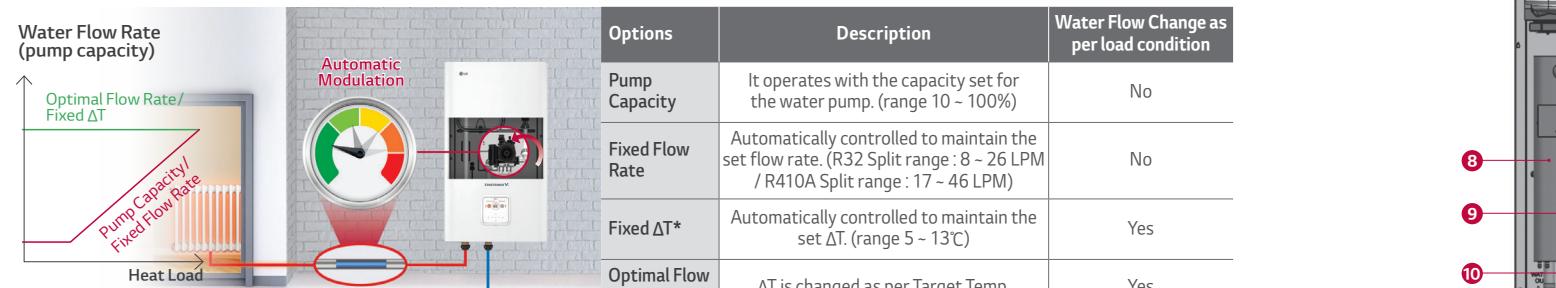


LG'S THERMA V SPLIT AT A GLANCE



THERMA V™

R32 Split / R410A Split

The LG THERMA V Split is a hydro box type comprising a separate indoor and outdoor unit, which are connected by refrigerant piping. Hydronic components such as plate heat exchanger, expansion tank and water pump are located within the indoor unit, making the unit capable of withstanding freezing outside ambient temperatures.

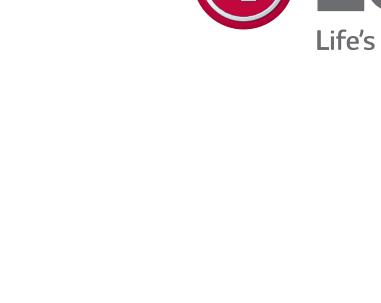

LG'S THERMA V R32 Split / R410A Split

Enhanced installation flexibility

- Refrigerant pipes connects IDU & ODU
- Hydronic components built into IDU: plate heat exchanger, water pump, back up heater, expansion tank, air vent, etc
- User-friendly installation settings interface

High efficiency & operational range

- SCOP up to 4.65 (average climate / low temp. application) : A+++
- 100% Heating capacity at -7°C outdoor temperature (except for 16kW R410A Split)
- Leaving water temperature up to 65°C (R32) / 57°C (R410A)
- Expanded operative range of solar thermal system

Innovative design & technology

- Built-in water flow & pressure sensors to monitor real-time water circuit
- Advanced water pump control (optimal flow rate, fixed capacity, fixed flow rate, fixed ΔT)
- Enhanced 2nd circuit control logic



Indoor Unit
1Ø HN091MR NK5

Outdoor Unit
HU051MR U44
HU071MR U44
HU091MR U44



Indoor Unit
1Ø HN1616M NK5

Outdoor Unit
HU121MA U33
HU141MA U33
HU161MA U33



Indoor Unit
3Ø HN1636M NK5

Outdoor Unit
HU123MA U33
HU143MA U33
HU163MA U33


Capacity Range [kW]	Phase	5	7	9	12	14	16
R32 Split	1Ø	Heating (5.5)	(7.0)	(7.0)			
		Cooling (5.5)	(7.0)	(7.0)			

Capacity Range [kW]	Phase	Heating	Cooling
R410A Split	1Ø / 3Ø	(12.0)	(14.0)
		(16.0)	

KEY COMPONENTS

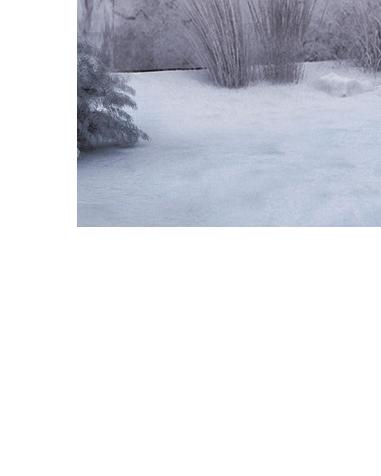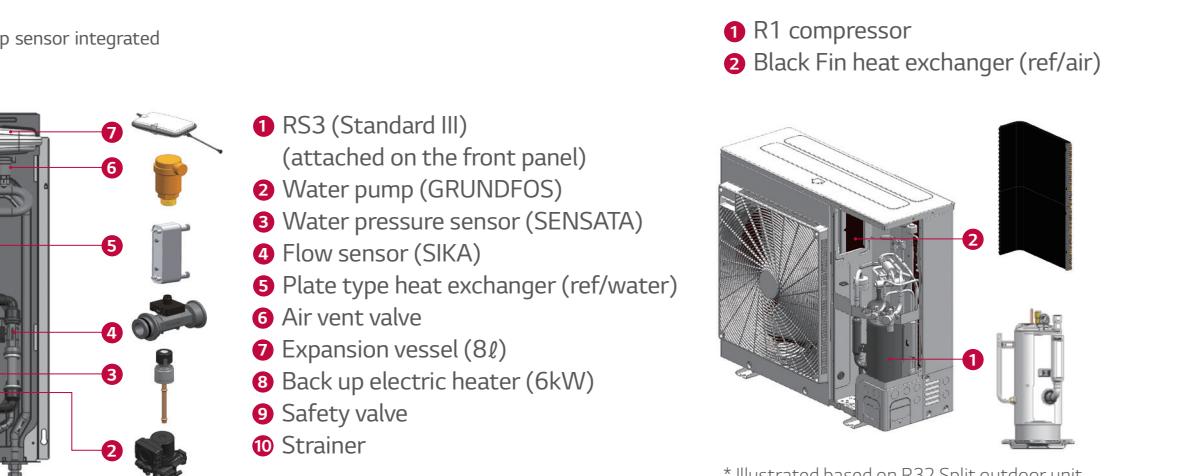


* Illustrated based on R32 Split outdoor unit.
** For R410A Split, Gold Fin heat exchanger is applied.

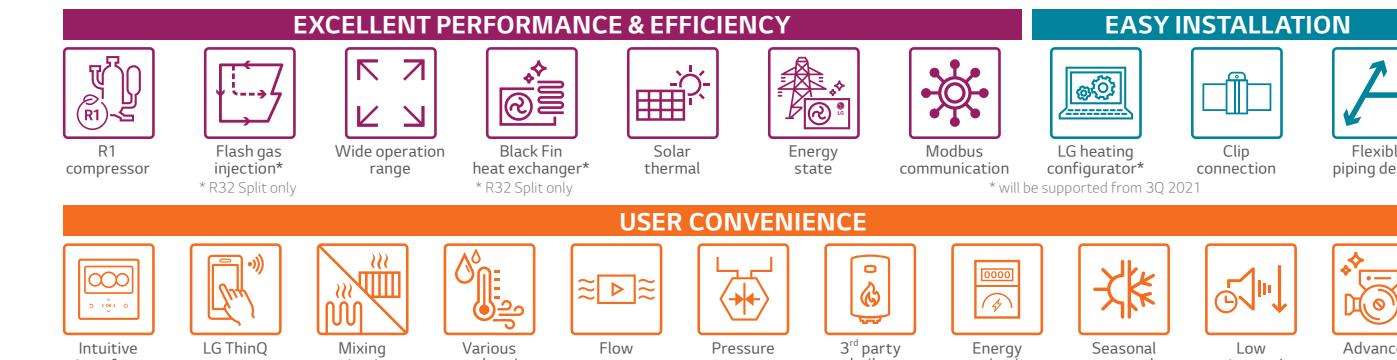


R1 Compressor™ LG'S REVOLUTIONARY TECHNOLOGY

R1 Compressor™ technology offers advanced efficiency, reliability and operational range due in part to the enhanced tilting motion of the scroll.

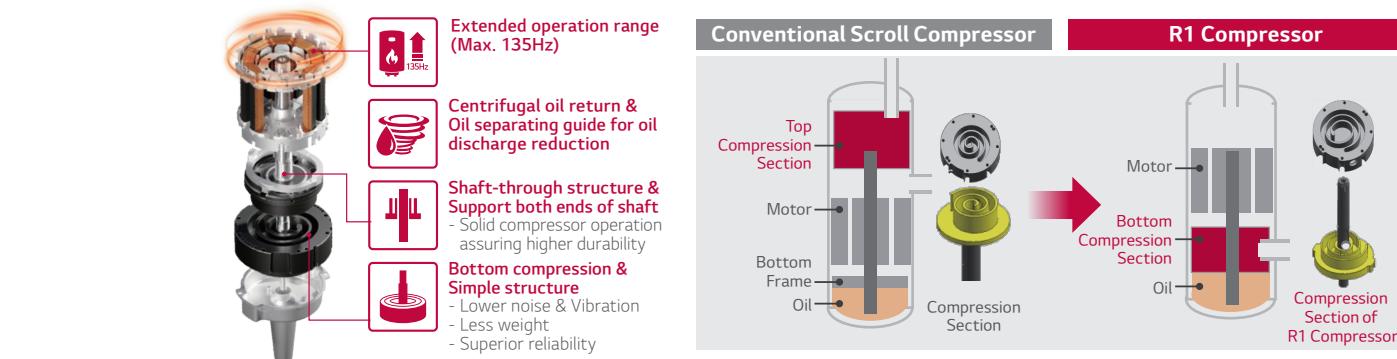


MODBUS COMMUNICATION

Considering the units in parallel installation, it is required to think how to control them. The R32 Split & R410A Split can be connected to 3rd party control system using Modbus protocol directly, without Modbus RTU gateway and PI485 gateway. Moreover, The R32 Split & R410A Split is able to support much more functions than conventional one using new Modbus memory map.

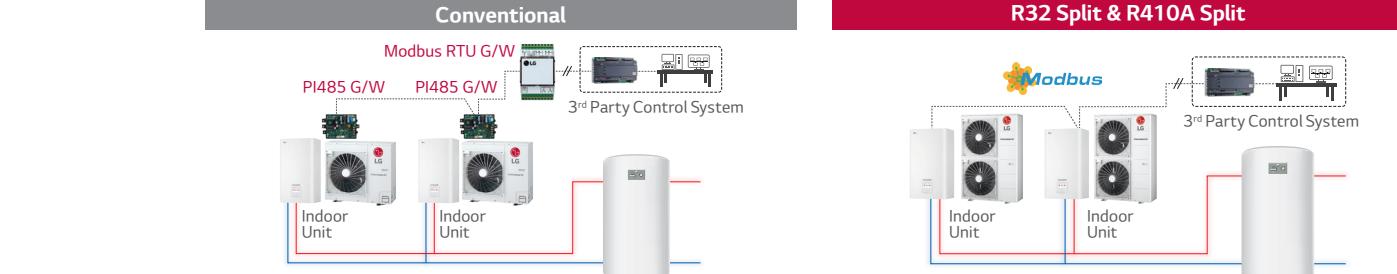

ENERGY STATES INTERLOCK

The R32 Split & R410A Split provide provides energy state interlock function that enables customers to use as much as possible of their own renewable energy. It can shift set points depending on input signal from Energy Storage System (ESS) or any other third-party device using Modbus or Digital 230V inputs.

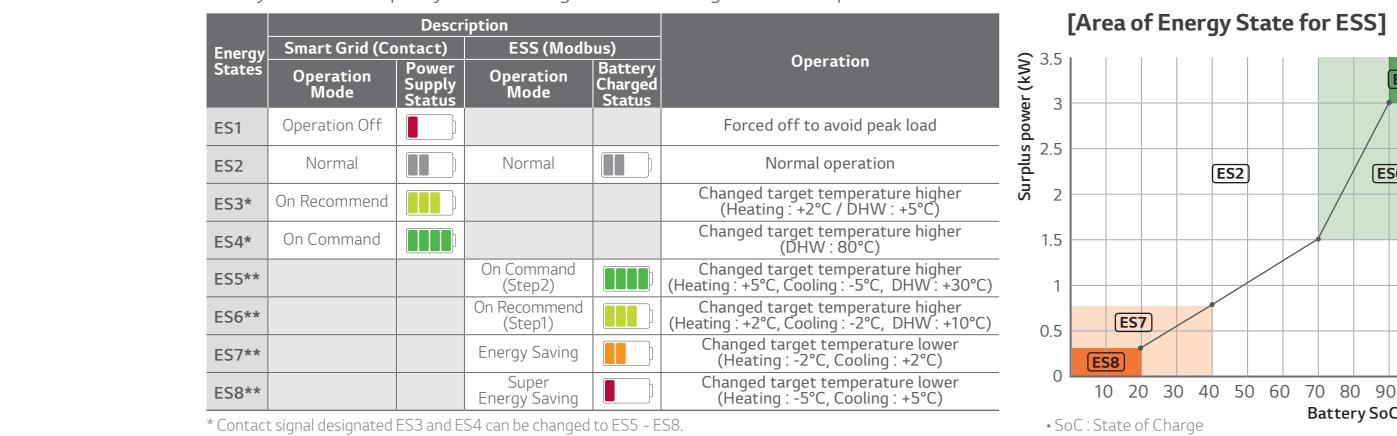

PRODUCT SPECIFICATION

R32 Split

INDOOR UNIT

Technical Specification		Indoor Unit	HN091MR NK5	
Operation Range (Leaving water temp.)	Heating Cooling	Min. - Max.	°C DB °C DB	15 - 65 5 - 27 (16 - 27) ¹⁾
Domestic Hot Water	Min. - Max.			15 - 80 ²⁾
Flow Sensor	Measuring Range	Min. - Max.		5 - 80
Water Pressure Sensor	Flow (Trigger point)	l/min		7
Expansion Vessel	Measuring Range	Min. - Max.	bfd (G)	0 - 20
Safety Valve	Pressure Limit	bar		8
Piping Connections	Upper Limit	bar		3
Water Circuit	Inlet	mm (Inch)		Male PT 25.4(1)
Outlet	mm (Inch)			Male PT 25.4(1)
Refrigerant Circuit	Gas	mm (Inch)	Ø 15.88 (5/8)	
Liquid	mm (Inch)	Ø 9.52 (3/8)		
Sound Power Level	Heating Rated	dB(A)		44
Dimensions	Unit	W x H x D	mm	490 x 850 x 315
Weight	Unit	kg		37.6
Electrical Specification		Indoor Unit	HN091MR NK5	
Wiring Connections	Type	mm ² x cores	0.75 x 4C	
	Sheath			
Number of Heating Coil	EA		2	
Capacity Combination	kW	3.0 + 3.0		
Back-up Heater	Step	2		
Heating Steps	2			
Power Supply	V, Ø, Hz	220-240, 1, 50		
Rated Current	A	25.0		
Power Supply Cable (Included earth, H07RN-F)	mm ² x cores	4.0 x 3C		

1) When fan coil unit not used. 2) DHW 50 - 80°C operating is available only when the booster heater is operating.

OUTDOOR UNIT

Technical Specification		OAT	LWT	Indoor Unit	HN091MR NK5		
		Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44		
Nominal Capacity	Heating	7°C 7°C 2°C	35°C 55°C 35°C	kW	5.50 5.50 3.30	7.00 5.50 4.20	9.00 5.50 5.40
Cooling	35°C 35°C 7°C	18°C 18°C 35°C	kW	5.50 5.50 1.12	7.00 7.00 1.43	9.00 9.00 1.94	
Nominal Power Input	Heating	2°C 35°C 35°C	55°C 18°C 18°C	kW	0.04 1.20 1.20	1.57 1.56 2.14	1.57 1.56 1.57
Cooling	35°C 35°C 7°C	7°C 35°C 35°C	kW	1.96 2.59 1.96	2.59 3.46 2.59	3.46 3.46 3.46	
COP	Heating	7°C 2°C	55°C 35°C	W/W	4.90 3.52	4.90 3.51	4.65 3.50
EER	Cooling	35°C 35°C	18°C 18°C	W/W	4.60 2.80	4.50 2.70	4.20 2.60
Operation Range (Outdoor temp.)	Heating Cooling	Min. - Max. Min. - Max.	°C DB °C DB		-25 - 35 5 - 48		
Compressor	Type	Min. - Max.					
Refrigerant	GWP (Global Warming Potential)	-					
	Precharged Amount	g					
	t-CO ₂ eq	-					
Piping Connections	Outer Diameter	Gas Liquid	mm (Inch) mm (Inch)		Ø 15.88 (5/8) Ø 9.52 (3/8)		
	Length	Standard	m		5		
	Max.	m			50		
	Level Difference	Max.	m		30		
	Chargeless-Pipe Length	m			10		
	Additional Charging Volume	g/m			30		
	Rated Water Flow Rate (at LWT 35°C)	l/min			15.81		20.12
	Sound Power Level (at LWT 35°C)	Rating	Rated				25.87
	Sound Pressure Level (at 1m)	Heating	Rated				
	Dimensions	mm			52		
	Unit	W x H x D			950 x 834 x 330		
Electrical Specification		Outdoor Unit	HU051MR U44	HU071MR U44	HU091MR U44		
Power Supply	Voltage, Phase, Frequency	V, Ø, Hz	220 - 240, 1, 50				
	Rated Running Current	Heating	A	5.0	6.3	8.6	
	Cooling	A	5.3	6.9	9.5		
	Recommended Circuit Breaker	A	16	20	25		
	Power Supply Cable (Included earth, H07RN-F)	mm ² x cores	4.0 x 3C				

1) Due to our policy of innovation some specifications may be changed without notification.

2) Wiring cable size must comply with the applicable local and national codes. And "Electric characteristics" chapter should be considered for electrical work and design. Especially the power cable and circuit breaker should be selected in accordance with that.


3) Sound power level is measured on the rated condition in accordance with ISO 9614 standard.

Therefore, these values can be increased owing to ambient conditions during operation.

SEASONAL ENERGY EFFICIENCY

Description	Indoor Unit	Outdoor Unit	HN091MR NK5		
	HU051MR U44	HU071MR U44	HU091MR U44		
Average Climate	SCOP	-	4.65	4.65	4.65
Water Outlet 35°C	Seasonal Space Heating Efficiency (Ƞs)	%	183	183	183
(According to EN14825)	Seasonal Space Heating Eff. Class (A++ to D Scale)	-	A++	A++	A++
Average Climate	SCOP	-	3.23	3.23	3.23
Water Outlet 55°C	Seasonal Space Heating Efficiency (Ƞs)	%	126	126	126
(According to EN14825)	Seasonal Space Heating Eff. Class (A++ to D Scale)	-	A++	A++	A++

* 5kW 10 model. * A++ to D scale.

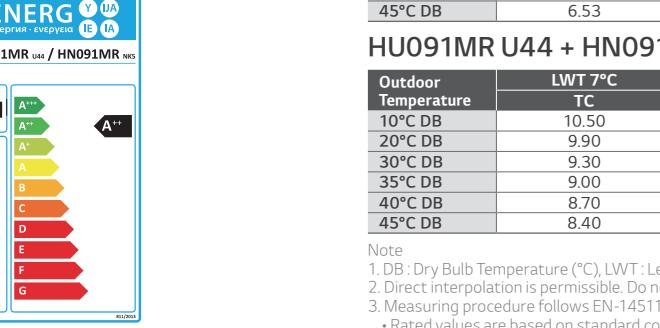

E
V
R32
65°C
A++
RI Compressor™ Black Fin LG ThinQ
011-W07035
* EHPA label under development.

Performance Table for Heating Operation

Maximum Heating Capacity (Including Defrost Effect)

R32 Split

INDOOR UNIT

HN091MR NK5

Outdoor Temperature	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
	TC							
-25°C DB	4.02	3.90	3.78	3.66	-	-	-	-
-20°C DB	4.64	4.51	4.38	4.26	4.13	-	-	-
-15°C DB	5.26	5.12	4.99	4.85	4.72	4.58	-	-
-7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
-4°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
2°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
7°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
10°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
15°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
18°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
20°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50
35°C DB	5.50	5.50	5.50	5.50	5.50	5.50	5.50	5.50

HU071MR U44 + HN091MR NK5

Outdoor Temperature	LWT 30°C	LWT 35°C	LWT 40°C	LWT 45°C	LWT 50°C	LWT 55°C	LWT 60°C	LWT 65°C
	TC							
-25°C DB	5.00	4.85	4.71	4.56	-	-	-	-
-20°C DB	5.58	5.43	5.27	5.11	4.95	-	-	-
-15°C DB	6.17	6.00	5.83	5.66	5.49	5.32	-	-