TV Entertainment and Advertisements on One Screen SuperSign TV LX540S



The LX540S includes a built-in TV tuner to broadcast TV programs and deliver advertisements simultaneously. This affordable solution allows you to create content and manage displays using the SuperSign Lite software. The 74 screen templates included with the display make it easier than ever for anyone to create dazzling content.

- Built-in speakers and TV tuner
- Wi-Fi Dongle Ready
- USB Plug and Play
- Fail Over
- · SuperSign Lite/C Compatibility

Screen Sizes

65", 60", 55", 49", 43"



Simple Connectivity

With the built-in SoC* and Wi-Fi dongle support, installation has been simplified. By removing the external media player and Ethernet/RS232C cables, the total cost of ownership (TCO) can be reduced.

* System on Chip



Fail Over

The USB failover function enables content to be displayed without dead spots when no input signal is available. It supports files in JPG format with a maximum file size of 10 MB.




Content Management

The SuperSign™ Solution includes SuperSign Lite and C features to provide digital media editing, scheduling, distribution, and management capabilities. Replace the last sentence with the following: The SuperSign Lite software will give you the capability to connect up to 50 TV's and/or monitors.

SuperSign[™] Solutions



- Supports a single user and up to 50 clients
- Includes dedicated TV templates
- Features a playlist editor

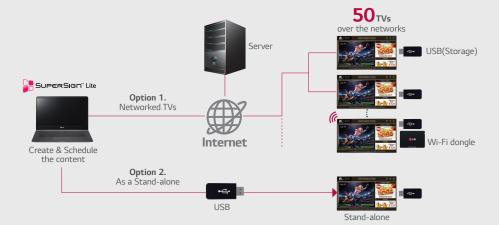



Sports Ba



Restaurant



TV Entertainment and Advertisements on One Screen SuperSign TV LX540S

Specifications		LX540S			
DISPLAY	Screen Size	65" / 60" / 55" / 49" / 43"			
	Туре	LED (Edge)			
	Resolution	1,920 x 1,080 (FHD)			
	Brightness	65", 60" : 350cd/m ² / 55" : 330cd/m ² / 49", 43" : 300cd/m ²			
BROADCASTING SYSTEM	Analog	PAL/SECAM			
	Digital	DVB-T2/C/S2			
AUDIO	Audio Output	10W + 10W			
HOSPITALITY FEATURES		Welcome Screen (Splash Image, Video), Lock Mode, One Channel Map, Multi IR Code, Hotel Mode, USE Cloning, IR Out (RS-232C), USB Auto Play Back, External Speaker out, Real Time Clock			
GENERAL FEATURES	Connectivity	MHL			
	Management	Remote diagnostics / Self diagnostics			
	Interactivity	HDMI-CEC (without ARC), HTNG-CEC			
	Auto Off / Auto Sleep	Yes			
	Smart Energy Saving	Yes			
	Intelligent Sensor	Yes			
	Anti-theft System	Kensington Lock (Stand)			
INTERFACE	Side	HDMI In, USB 2.0(2), CI Slot, Headphone Out (3.5mm Phone Jack)			
	Rear	RF In, Component In (Y, Pb,Pr) + Audio (L/R), Digital Audio Out (Optical), RGB In (D-sub 15pin), PC Audio Input, RS-232C (D-sub 9pin), HDMI In, LAN (RJ45), Ext SPK out (3.5mm Phone Jack), Full Scart			
ACCESSORY		L-CON, Power cord, CD title (Simple manual)			
POWER	Voltage, Hz	100 ~ 240V, 50/60Hz			
	Typical (Watts)	65" : 143W / 60" : 136W / 55" : 95.4W / 49" : 80.8W / 43" : 79W			
	Stand-by	0.3₩↓			
STANDARD APPROVAL	Safety	СВ			
	Environment	CE			
	Etc.	ROHS, ErP, Eco flower			
		ErP Class: 60": A+, 55": A++, 49": A+, 43": A+ /			
	Eco	On Power Consumption (IEC62097 Edition 2) (W): 60": 93, 55": 60, 49": 53, 43": 51 / Stand By (W): 0.3 / Luminance Ratio (%): 65 / Mercury Content (mg): 0 / Average Annual Consumption (kh): 60": 136, 55": 88, 49": 77, 43": 74			
SOFTWARE COMPATIBILITY		SuperSign Lite/C SuperSign Simple Editor (Available Oct. 2015)			
WARRANTY		2-Year Limited Warranty (Parts and Labor) Extended Warranties Available			
OTHER	UPC	65": 7 19192 19701 5 / 60": 7 19192 19702 2 / 50" : 7 19192 19703 9 49" : 7 19192 19704 6 / 43" : 7 19192 19875 3			


Dimension (unit: mm)



	65"	60"	55"	49"	43"
W x H x D (With Stand)	57.5 "x35.4"x11.6"	53.7" x 33.2" x 11.6"	48.9" x 30.5" x 8.7"	47.1 "x 27.5" x 8.7"	38.3" x 24.6" x193
Weight (With Stand)	75lbs	64.6lbs	46.1lbs	38.8lbs	28lbs
VESA (mm)	300 x 300	300 x 300	300 x 300	300 x 300	200 x 200

Interface

- 1 LAN
- 2 EXTERNAL SPEAKER OUT
- OPTICAL DIGITAL
 OPTICAL DIGITAL
- AUDIO OUT
- 4 AUDIO IN S COMPONENT IN USB IN
- 6 HDMI
- **7** RS-232C IN
- 8 RGB IN
- AV ULNB
- # H/P OUT
- B HDMI IN2(MHL)





Download LG Commercial Display Mobile App





More info www.LGsolutions.com





