## 6.3 cu. ft. Gas Range

- Built-in Air Fry
- Fan Convection
- 6.3 cu. ft. Capacity
- EasyClean® + Self Clean
- UltraHeat 20k BTU Power Burner
- LG ThinQ® Technology (Wi-Fi)









COLOR AVAILABILITY			
LRGN6323Y – Stainless Steel			
LRGN6323Z – Black Stainless Steel			
CAPACITY			
Oven Capacity	6.3 cu. ft.		
Drawer Capacity	0.8 cu. ft.		
OVEN FEATURES	OVEN FEATURES		
Convection System	ProBake® Convection		
Oven Cooking Modes			
Bake, Broil, Air Fry, EasyClean®, Self Clean, Convection Bake, Convection Roast, Warm			
Air Sous Vide	No		
Built-in Air Fry	Yes (Air Fry Tray Included)		
Temperature Probe	No		
Oven Racks	2 Standard		
Number of Rack Positions	7		
Broil Element (BTU, NG / LP)	13,500 / 12,500		
Bake Element (BTU, NG / LP)	19,000 / 17,000		
Convection Conversion	Yes		
EasyClean®	Yes		
Self Clean	Yes		
GoCook Smart Oven Light	Yes (1)		
Door Lock	Yes		
Automatic Safety Shut-Off	After 12 Hours		
DRAWER FEATURES			
Туре	Storage		

COOKTOP FEATURES	
Cooktop Type	Sealed
Number of Burners	5
Burner BTU (NG / LP)	
Left Front	12,000 / 10,000
Left Rear	9,100 / 9,100
Center	10,000 / 10,000 (Oval)
Right Front	20,000 / 12,500 (UltraHeat)
Right Rear	5,000 / 5,000
Cooktop Burner Grate Material	Cast Iron
Continuous Grates	Yes
CONTROLS	
Cooktop Control Type	Front Control Knobs
Oven Control Type	Touch Pad
Display	LED (White)
Language	English
Kitchen Timer	Yes
Timed Cook	Yes
Clock	Yes
Temperature Unit of Measure	°F or °C
Cooking Complete Reminder Volume	High, Low, Off
Oven Control Lock	Yes
CONVENIENCE	
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)
SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ® Technology	Yes
ThinQ Care <sup>™</sup>	Yes
Voice Control	Amazon Alexa, Google Assistant
SmartDiagnosis™	Yes
Smart Recipe (3rd Party Apps)*	Yes (Innit and SideChef)

# **LRGN6323\_**

FINISHES AND APPEARANCE		
Fingerprint & Smudge Resistant Exterior	No	
Cooktop Finish	Black Porcelain Enamel	
Handle / Knobs	Y – Stainless Steel Appearance Z – Black Stainless Steel Appearance	
Oven Door Feature	WideView <sup>™</sup> Window	
TECHNICAL SPECS		
Fuel Type	NG / LP	
Required Power Supply	120V, 60Hz	
Minimum Circuit Rating	15 Amp	
Power Cord Type	3-Prong, Attached to Unit	
Power Outlet Location	See Installation Diagram	
Gas Supply Location	See Installation Diagram	


2 Standard Racks, Air Fry Tray, Cast Iron Griddle, Anti-Tip Kit, LP Conversion Kit		
DIMENSIONS / CLEARANCES / WEIGHTS		
Product Dimensions (W x H x D w/Handle)	29 <b>7/<sub>8</sub></b> " x 46 <b>1/<sub>2</sub></b> " x 29 <b>9/<sub>32</sub></b> "	
Product Height to Cooking Surface	36"	
Cutout Dimensions (W x H x D)	30" x 36" x 25"	
Carton Dimensions (W x H x D)	32 <b>1</b> / <b>2</b> " x 51" x 30 <b>1</b> / <b>2</b> "	
Approx. Weight (Product / Carton)	176 lbs. / 196 lbs.	
LIMITED WARRANTY		
Parts and Labor	1 Year	


**INCLUDED ACCESSORIES** 

### **DIMENSIONS / CLEARANCES**

Provide proper clearance between the range and adjacent combustible surfaces. These dimensions must be met for safe use of your range. The location of the electrical outlet and pipe opening may be adjusted to meet specific requirements. The range may be placed with O"clearance (flush) at the back wall.

### **GAS PIPE AND ELECTRICAL OUTLET LOCATIONS**



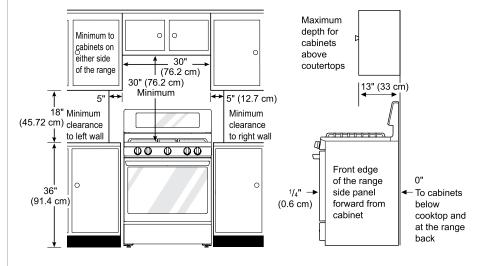

# Depth with door closed (includes door handle) 29 7/8" (75.9 cm) Reight 46 1/2" (118.1 cm) Depth with door open 47 1/4" (120.1 cm)

DIMENSIONS / CLEARANCES		
Width	29 <b>7</b> / <b>8</b> " (759 mm)	
Height	46 <b>1</b> / <b>2</b> " (1181 mm)	
Height to Cooking Surface	36" (914 mm)	
Depth (Includes Door Handle)	29 <b>29</b> / <b>32</b> " (734.2mm)	
Depth (Excludes Door Handle)	26 <b>9</b> / <sub><b>16</b></sub> " (674.7 mm)	
Depth when door is fully opened	47 <b>1</b> / <b>4</b> " (1201 mm)	