## 17.5 cu. ft. **Top Freezer** Refrigerator

• 17.5 cu. ft. Capacity

COLOR AVAILABILITY

CAPACITY Refrigerator (cu. ft.)

Freezer (cu. ft.)

ENERGY

Ice System

COOLING Compressor Type

**Dual Evaporators** 

Door Cooling+

CONVENIENCE Display Type

Door Alarm Child Lock

ADA Compliant

Sabbath Mode

Multi-Air Flow System

Temperature Sensors Fresh Air Filter

Temperature Controls

Auto Closing Door Hinge

LoDecibel® Quiet Operation

Year)

Total Capacity (cu. ft.)

Energy Consumption (kWh/

ENERGY STAR® Certified

**WATER & ICE SYSTEM** Ice & Water Dispenser

Daily Ice Production (lbs.)

Ice Storage Capacity (lbs.)

- · Reversible Door
- Smart Inverter Compressor
- Crisper Drawer
- Optional Ice Maker LK50C

LT18S2100S - Stainless Steel

13

4.5

17.5

344

Yes

No

Ice Maker

2.2 lbs.

6.6 lbs.

Yes

No

No

No

No

No

No

Yes

Knob Dial

Electronic / Manual


LT18S2100W - White










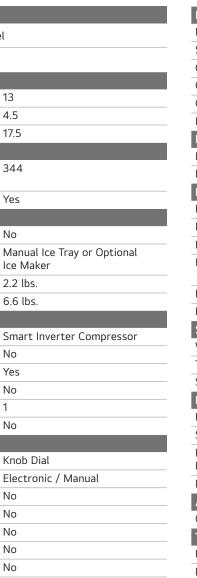


REFRIGERATOR		
No. of Shelves	2 Full Width (Fixed)	
Shelf Construction	Tempered Glass	
Crisper Bins	1	
Glide N' Serve® Pantry Drawer	No	
Cool Guard	No	
Refrigerator Light	Ceiling LED	
REFRIGERATOR DOOR		
No. of Door Bins	3 (2 Gallon, 1 Half Gallon)	
Door Bin Construction	1-Piece (Clear)	
FREEZER		
Freezer Type	Swing Door	
No. of Shelves	1 Adjustable Glass Shelf	
No. of Door Bins	2 Full Width (Clear)	
Ice Storage	Manual Ice Tray or Optional Ice Maker	
Freezer Light	No	
Freezer Handle	Pocket Handle	
SMART FEATURES		
Wi-Fi Enabled	No	
ThinQ <sup>®</sup> Technology	No	
SmartDiagnosis™	No	
MATERIALS AND FINISHES		
Hidden Hinges	Yes	
Surface	Smooth	
Fingerprint & Smudge Resistant Exterior	No	
Handles	Pocket Handle	
ACCESSORIES		
Optional Ice Maker	LK50C	
TECHNICAL SPECS		
Required Power Supply	115 V, 60 Hz, 15 Amp	
Plug Type	3-Prong	
Power Cord Location	Back	

DIMENSIONS / CLEARANCES	s / WEIGHTS	
Depth with Handles	33 <b>1/2</b> "	
Depth without Handles	33 <b>3/4</b> "	
Depth without Door	29 3/4"	
Depth (Total with Door Open)	58 1/4"	
Height to Top of Case	64"	
Height to Top of Door Hinge	65"	
Width	27 <b>1/2</b> "	
Width (Door Open 90° with Handle)	29 1/4"	
Width (Door Open 90° without Handle)	29 1/4"	
Door Edge Clearance with Handle	1 3/4"	
Door Edge Clearance without Handle	13/4"	
Installation Clearance	Sides 2", Top 2", Back 2"	
Approx. Weight (Product / Carton)	161 lbs. / 174.2 lbs.	
Carton Dimensions (WxHxD)	28 <b>3</b> / <b>4</b> " x 67 <b>1</b> / <b>2</b> " x 28 <b>3</b> / <b>4</b> "	
LIMITED WARRANTY		
Parts & Labor	1 Year	
Sealed System (Parts & Labor)	5 Years	
Compressor (Parts & Labor)	5 Years	
Linear/Inverter Compressor (Parts Only)	6-10 Years	

## **DIMENSIONS / CLEARANCES**





DIMENSIONS / CLEARANCES		
Α	Depth without Handle	33 <b>3</b> / <b>4</b> " (858.5 mm)
В	Width	27 <b>1/2</b> " (700 mm)
С	Height to Top of Case	64" (1625 mm)
D	Height to Top of Hinge	65" (1650 mm)
Е	Back Clearance	2" (50 mm)
F	Depth without Door	29 <b>3</b> / <b>4</b> " (757.5 mm)
G	Depth (Total with Door Open 90°)	58 <b>1</b> / <b>4</b> " (1481.5 mm)

## **INSTALLATION NOTES**

- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 2 inches (50.8mm) between the back of the refrigerator and the wall.

