

LG DIGITAL SIGNAGE

Information Display and Solutions



* All images used are for illustrative purposes only

As a continuing policy of product development at LG Electronics, the design and specifications are subject to change. They may vary from model to model. Colour/shades may vary due to printing restrictions. E&OE



B2B CUSTOMER CARE
1800-180-9898 (Toll Free)
5757554 (Send SMS)
www.lg.com/in/support

LG Service India Mobile App Available at Google Play
MOBILE APP

www.facebook.com/lgindiapage/
www.twitter.com/LGIndia

To know more about LG, visit www.lg.com/in
For B2B Solutions/Product enquiries, please write to b2b.solutions@lge.com
For B2B Service, please write to b2bsupport.india@lge.com




Regd. Office: LG Electronics India Pvt. Ltd., A Wing (3rd Floor), D-3, District Center, Saket, New Delhi-110017

CIN No. U32107DL1997PTC220109

Shape Immersive Moments. Share Innovative Experiences.

If you believe your business should be more impactful and iconic, LG Business Solution is here to realize the true potential. Display all your boundless ideas on digital signages and watch the technology of LG Business Solutions shape them into immersive moments. Make your ideas more outstanding through reality and vividness beyond your imagination and interactivity that allows people to engage. All immersive moments combines to create innovative experiences for your business.

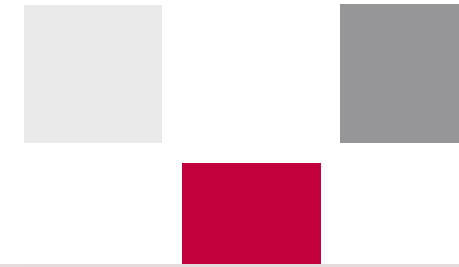

CONTENTS

8 webOS

10 OLED

22 LED

52 High Brightness

62 Video Wall

74 Ultra Stretch





80 Interactive

90 Ultra HD Stand-alone

98 Full HD Stand-alone

108 Media Player

112 Smart TV Signage

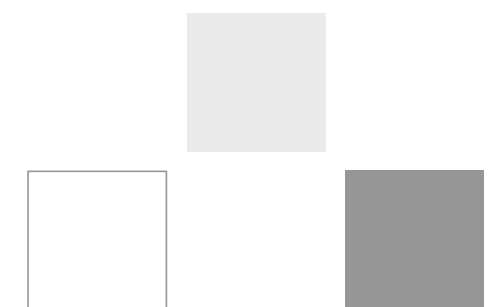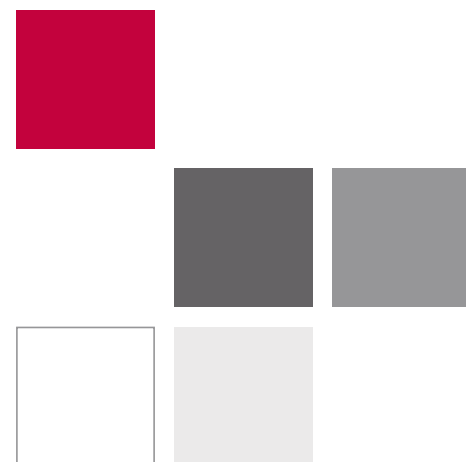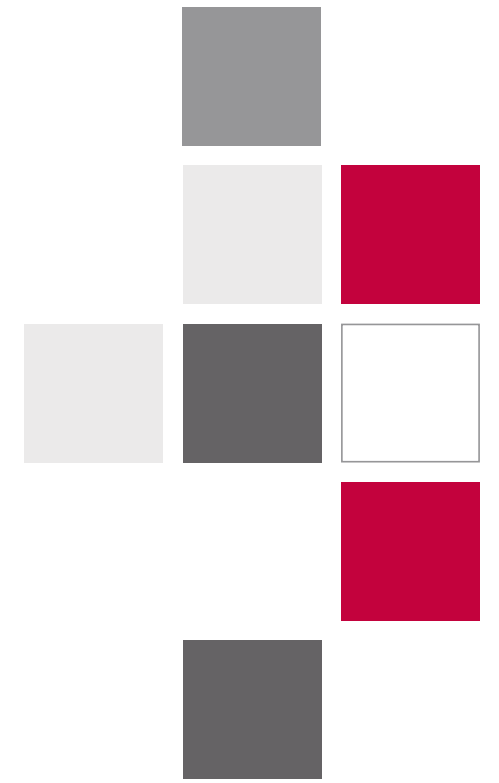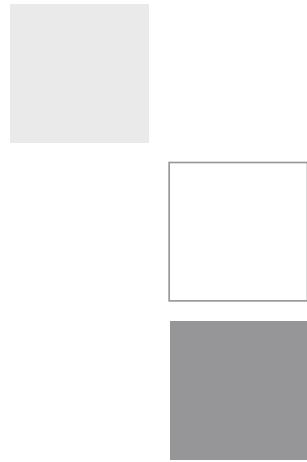



LG webOS

Smart Signage Platform

Self-Playing and Scalable Smart Display

webOS is a web-based multipurpose platform in which a variety of web applications are implemented, providing smooth content playback without a separate media player. Powered by built-in SoC, it can execute several tasks at once, and various external sensors can be simply added for differentiated customer interaction solutions.



Powerful Visual Performance

Several different videos* can be played simultaneously via web apps, and various animation effects such as scaling or rotating, are added to content using CSS (Cascading Style Sheets) transition effects. Real-time streaming** is also available, providing the flexibility to organize and diversify content free from capacity limits.



* The current 2 video tags may expand to 4 video tags in the 3Q of 2019.
** Available protocols may vary in different webOS versions.

Embedded Content Management System

webOS offers an embedded content management system equipped with an intuitive GUI, meaning that first-time users won't have to go through a complicated learning process in order to manage content. If you want to operate multiple displays in your own place of business, it is especially easy to group and manage them using the Group Manager*, without the need for a separate PC or software.



* The Group Manager is available for webOS 3.0 or higher.



Real-Time Remote Monitoring and Control

Through the Control Manager*, the embedded web monitoring solution, you can control and monitor the status of multiple displays in different locations in real-time. It is also available on internet-connected mobile devices.



* The Control Manager is available for webOS 3.0 or higher.



OLED
Artistic Space Beyond Display

Beyond its informative features, LG OLED signage delivers unsurpassed advertising effectiveness, redesigning space as a prestige-enhancing landmark with perfect colors and innovative forms.



**Transparent
LG OLED Signage**

LG has developed another amazing innovation that has turned imagination into reality. LG Transparent OLED signage illuminates spaces which had previously been hidden behind a screen. Expressing vivid and clear colors while maintaining high transparency, it highlights and enhances the understanding of the objects behind it while giving viewers an extraordinary media experience.

Unrivaled Picture Quality

Perfect Black

Limitless contrast and the deepest blacks
Self-lighting pixels switch off completely to reproduce absolute blacks with no light bleed, offering infinite contrast.



LCD

LG OLED Signage

Stunning Color & Contrast

Accurate & intense color reproduction
Self-lighting pixels bring colors to life with superb accuracy.



LCD

LG OLED Signage

Perfect Viewing Screen

Wide Viewing Angle

LG OLED Signage delivers awe-inspiring picture quality across the entire screen, even from wide viewing angles.



Perfect Design

LG's OLED technology realizes design flexibility with unbelievably lightweight and slim display.



Slim & Lightweight



Flexible



in Glass



Transparent


How LG OLED makes a great innovation?

LG's OLED does not require a backlight unit nor a liquid crystal layer, which enables perfect black and slimmer design. It overcomes the limits of current LCD displays in terms of picture quality and design flexibility.



LG OLED Signage

VS

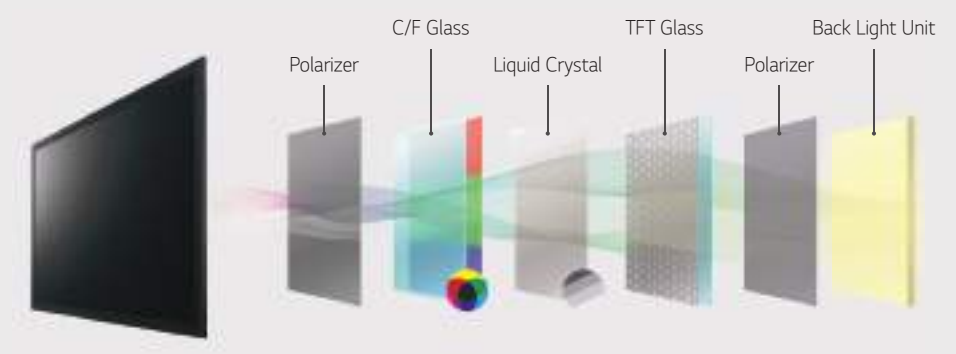

LCD

* Models may vary by region. Check with local sales for availability.



webOS
Transparent Open Frame OLED Signage
55EW5F-A

- Full HD: 1,920 × 1,080
- Brightness (Typ., panel): 400 cd/m² (APL ¹⁾ 25%)
- Transparency (Typ.): 38%
- Depth: 6.6 mm
- Landscape & portrait mode
- Single and tiling design availability

webOS
Wallpaper OLED Signage
65EJ5E, 55EJ5E

- Ultra HD: 3,840 × 2,160 (65"), Full HD: 1,920 × 1,080 (55")
- Brightness (Typ.): 400 cd/m² (APL 25%)
- Depth: 6.0 mm (65"), 4.9 mm (55")
- Landscape & portrait mode
- Dedicated wall fixers
- N×N expandability



webOS
Flexible Curved OLED Signage
55EF5E/F

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 400 cd/m² (APL 25%)
- Depth: 12.4 mm
- Landscape & portrait mode
- Available in various curvatures (Concave, convex up to 1,000R)

webOS
Video Wall OLED Signage
65EV5E

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 400 cd/m² (APL 25%)
- Depth: 7.9 mm
- Seam (A to A ²⁾): 6.7 mm
- Portrait mode
- 1 x N configuration



1) APL: Average Picture Level
2) A to A: Active area to Active area

* Specifications are subject to change without notice

55EW5F-A

Panel	Screen Size	55"	
	Panel Technology	OLED	
	Aspect Ratio	16 : 9	
	Native Resolution	1,920 x 1,080 (FHD)	
	Brightness (Typ.)	400/150 cd/m ² (APL ¹⁾ 25% / 100%, Panel)	
	Transparency (Typ.)	38% (Panel)	
	Viewing Angle (H x V)	178 x 178	
	Surface Treatment	Hard Coating (2H), Anti-reflection Treatment of the Front Polarizer (Reflectance Typ. 14%)	
	Lifetime (Typ.)	30,000 Hrs	
	Operation Hours	18 Hrs / 7 days *Moving Video Only	
	Orientation	Landscape & Portrait	
	Connectivity	Input	HDMI, DP, USB (2)
		Output	DP, Audio
External Control		RS232C In/out, RJ45 (LAN) In/out, IR In	
Physical Specification	Bezel Color	Silver	
	Bezel Width	7.9 / 7.9 / 7.9 / 121.7 mm (T/L/R/B)	
	Dimension (W x H x D)	(Head) 1,225.53 x 810.1 x 6.6 mm (Signage Box) 782.8 x 238.4 x 34.7 mm	
	Weight	13.9 Kg Signage Box - 3.4 Kg	
Environment Conditions	Operation Temperature	0°C to 40°C	
	Operation Humidity	10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	
	Power Type	Built-In Power	
	Power Consumption Typ.	309 W *8 Color Bar	
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC	
	ErP / Energy Star	Yes / No	
Media Player Compatibility	OPS Type Compatible	No	
	External Media Player Attachable	Yes	

1) APL: Average Picture Level

* Specifications are subject to change without notice

65EJ5E, 55EJ5E

55EF5F

Panel	Screen Size	65", 55"	55"	
	Panel Technology	OLED	OLED	
	Aspect Ratio	16 : 9	16 : 9	
	Native Resolution	65": 3,840 x 2,160 (UHD), 55": 1,920 x 1,080 (FHD)	1920x1080(FHD)	
	Brightness (Typ.)	400/150 cd/m ² (APL 25%/100%)	150/400nit (APL 100%/25%) * Average Picture Level	
	Viewing Angle (H x V)	178 x 178	178x178	
	Surface Treatment	Hard Coating (2H), Anti-reflection Treatment of the Front Polarizer (Reflectance Typ. 1.2%)	Hard coating(2H), Anti-reflection treatment of the front polarizer (Reflectance Typ. 1.2%)	
	Lifetime (Typ.)	30,000 Hrs	30,000 Hrs	
	Operation Hours	65": 12 Hrs / 7 Days *Moving Video Only 55": 18 Hrs / 7 Days *Moving Video Only	18Hrs/7days (Moving Video Only)	
	Orientation	Landscape & Portrait	Portrait & Landscape	
	Connectivity	Input	65/55EJ5E: HDMI, DP, USB 2.0 (2)	HDMI, DP, USB 2.0 (2)
		Output	DP, Audio	DP, Audio
		External Control	RS232C In/out, RJ45 (LAN) In/out, IR In	RS232C In/out, RJ45 (LAN) In/out, IR In
Physical Specification	Bezel Color	Black	Black	
	Bezel Width	65/55EJ5E: 0.9mm (Even) *Off-bezel 65": 8.1 mm (T), 10.7 mm (B), 8.3 mm (L/R) *On-bezel 55EJ5E": 5.3 mm (T/L/R), 11.0 mm (B) *On-bezel	LandScape: 0.6 / 0.6 / 6.7 / 6.7mm (Flat, Off Bezel) Portrait: 0.6 / 0.6 / 6.7 / 6.7mm (Flat, Off Bezel) LandScape: 5.0 / 10.6 / 7.6 / 7.6mm (Flat, On Bezel) Portrait: 5.0 / 5.0 / 7.8 / 13.2mm (Flat, On Bezel)	
	Dimension (W x H x D)	65EJ5E (Head): 1,445.1 x 822.6 x 6.0 mm 65EJ5E (Signage Box): 782.8 x 239.0 x 35.5 mm 55EJ5E (Head): 1,220.3 x 696.8 x 4.9 mm 55EJ5E (Signage Box): 782.8 x 238.4 x 34.7 mm	1224.9 x 696.2 x 38.0mm (Head, w/ Pemunt) 701.4 x 1219.7 x 38.0mm (Head, w/ Pemunt) 1224.9 x 696.2 x 12.4mm (Head Only) 701.4 x 1219.7 x 12.4mm (Head Only) * Signage Box : 413 x 353 x 57.3mm	
	Weight	65EJ5E (Set): 13.5 kg, (Signage Box) 3.6 kg 55EJ5E (Set): 10 kg, (Signage Box) 3.4 kg	LandScape: 9.7kg (SET) Portrait: 11.3kg (SET) * Signage Box : (3.5kg)	
	Weight			
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	
	Operation Humidity	10% to 80%	10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Type	Built-In Power	Built-In Power	
	Power Consumption Typ.	65EJ5E: 440 W *8 Color Bar 55EJ5E: 309 W *8 Color Bar	309W (8 color bar)	
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1 (65/55EJ5E)	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	
	ErP / Energy Star	Yes / No	Yes / No	
Media Player Compatibility	OPS Type Compatible	No	No	
	External Media Player Attachable	Yes	Yes	

* Specifications are subject to change without notice

		55EF5E-L	55EF5E-P
Panel	Screen Size	55"	55"
	Panel Technology	OLED	OLED
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 × 1,080 (FHD)	1,920 × 1,080 (FHD)
	Brightness (Typ.)	400/150 cd/m ² (APL ¹⁾ 25%/100%)	400/150 cd/m ² (APL 25%/100%)
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	Hard Coating (2H), Anti-reflection Treatment of the Front Polarizer (Reflectance Typ. 1.2%)	Hard Coating (2H), Anti-reflection Treatment of the Front Polarizer (Reflectance Typ. 1.2%)
	Lifetime (Typ.)	30,000 Hrs	30,000 Hrs
	Operation Hours	18 Hrs / 7 Days *Moving Video Only	18 Hrs / 7 Days *Moving Video Only
	Orientation	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	HDMI, DP, USB (2)	HDMI, DP, USB (2)
	Output	DP, Audio	DP, Audio
	External Control	RS232C In/out, RJ45 (LAN) In/out, IR In	RS232C In/out, RJ45 (LAN) In/out, IR In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	0.6 mm (T/B), 6.7 mm (L/R) *Flat, Off-bezel 5.0 mm (T), 10.6 mm (B), 7.6 mm (L/R) *Flat, On-bezel	0.6 mm (T/B), 6.7 mm (L/R) *Flat, Off-bezel 5.0 mm (T/B), 7.8 mm (L), 13.2 mm (R) *Flat, On-bezel
	Dimension (W × H × D)	(Head) 1,224.9 × 696.2 × 12.4 mm (Signage Box) 413 × 353 × 57.3 mm	(Head) 701.4 × 1,219.7 × 12.4 mm (Signage Box) 413 × 353 × 57.3 mm
	Weight	(Set) 9.9 kg (Signage Box) 3.5 kg	(Set) 9.9 kg (Signage Box) 3.5 kg
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ. 309 W *8 Color Bar	309 W *8 Color Bar
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KCC	FCC Class "A" / CE / KCC
	ErP / Energy Star	Yes / No	Yes / No
Media Player Compatibility	OPS Type Compatible	No	No
	External Media Player Attachable	Yes	Yes

1) APL: Average Picture Level

* Specifications are subject to change without notice

		65EV5E
Panel	Screen Size	65"
	Panel Technology	OLED
	Aspect Ratio	16 : 9
	Native Resolution	3,840 × 2,160 (UHD)
	Brightness (Typ.)	400/150 cd/m ² (APL 25%/100%)
	Viewing Angle (H × V)	178 × 178
	Surface Treatment	Hard Coating (2H), Anti-reflection Treatment of the Front Polarizer (Reflectance Typ. 1.2%)
	Lifetime (Typ.)	30,000 Hrs
	Operation Hours	12 Hrs / 7 Days *Moving Video Only
	Orientation	Portrait
Connectivity	Input	HDMI, DP, USB (2)
	Output	DP, Audio
	External Control	RS232C In/out, RJ45 (LAN) In/out, IR In
Physical Specification	Bezel Color	Black
	Bezel Width	1.2 mm (Even) *Off-bezel 9.1 mm (T/B), 8.7 mm (L), 11.6 mm (R) *On-bezel 6.7 mm (Seam)
	Dimension (W × H × D)	1,634.6 × 1,446.7 × 7.9 mm (Head 1×2) 2,445.4 × 1,446.7 × 7.9 mm (Head 1×3) 782.8 × 35.5 × 239.0 mm (Signage Box)
	Weight	29.4 kg (Set 1×2) / 44.5 kg (Set 1×3)
Environment Conditions	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption	Typ. 440 W *8 Color Bar
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes / No
Media Player Compatibility	OPS Type Compatible	No
	External Media Player Attachable	Yes



| COLOR TRANSPARENT LED FILM

Seamlessly Color Your Space and Brand

LG's revolutionary Color Transparent LED film endows the glass surface or window to which it is attached with a mystical beauty full of vivid color, while interacting seamlessly with the surrounding environment.

High Transparency

High transparency (73%*) allows glass to remain visible even after attaching the color transparent LED film, with no adverse effects on the original design. Displaying dynamic content as digital signage, it blends into the glass as well.



* 73% transparency is similar to that of a car's tinted front window.

Full Color Expression

LG Color Transparent LED film delivers a surprisingly wide range of colors using a 24 mm pitch, while still maintaining a high transparency. Applications are not confined to delivering simple brand logos or pictograms, but can be extended to display an entire video or pictures in which various colors are combined.



* Indoor installation only

Self-adhesive Film

The transparent LED film is self-adhesive, so it can be easily attached to the surfaces of existing window glass without the need for any complicated construction.



Superb Expandability and Flexibility


The size and layout of the film can be customized to fit in to the installation area. It can be expanded by adding more films in a vertical or horizontal way, or cut in parallel with the bezel to meet size requirements.



* The film must be cut in parallel with the the bezel by 1 pixel.

Curved Format Supported

The transparent LED film supports curvatures up to 1,100R concave for curved glass or window applications. This allows a wider range of venues to be redesigned as a landmark.

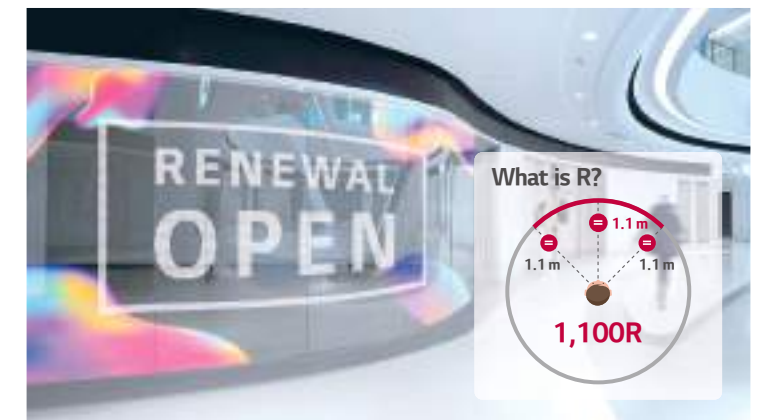

* Models may vary by region. Check with local sales for availability.



**Color Transparent LED Film
LAT240DT1**


- Pitch: 24 mm
- Transmittance: 73 %
- Brightness: > 1,000 cd/m²
- Curvature (Concave): 1,100 R
- Self-adhesive film

* Specifications are subject to change without notice

LAT240DT1

Pitch	24 mm
LED Type	R, G, B 3in1 Color Package (SMD1818)
Resolution	28 × 20
Pixels per Panel	560
Pixel Density (point/m ²)	1,736
Brightness	>1,000 cd/m ²
Contrast Ratio	≥ 100,000:1
Luminance Uniformity	≥ 70%
Viewing Angle (H × V)	120 × 120
Life Time (Brightness 50%)	50,000 Hrs
Daily Usage	24 Hrs / 7 Days
Adhesion (After Installation)	50,000 Hrs
Transmittance	73%
Operating Temperature	0 °C - 45 °C (Indoor Glass Installation Only)
Curved Installation	1,100R (Concave)
Film Trimming	Yes (Parallel to the Bezel Side Only)
Color Processing	130/120/110 Level (R, G, B)
Colors	1,716,000 Colors
Color Chromaticity	Cx: 0.28±0.03, Cy: 0.28±0.03
Dimension (W × H × D)	668 × 480 × 2.0 mm (with Front & Back Protection Film)
Weight	0.73 kg
Power Consumption	37 W (Transparent Panel 1ea, Bezel Kit 1ea)

System Connection

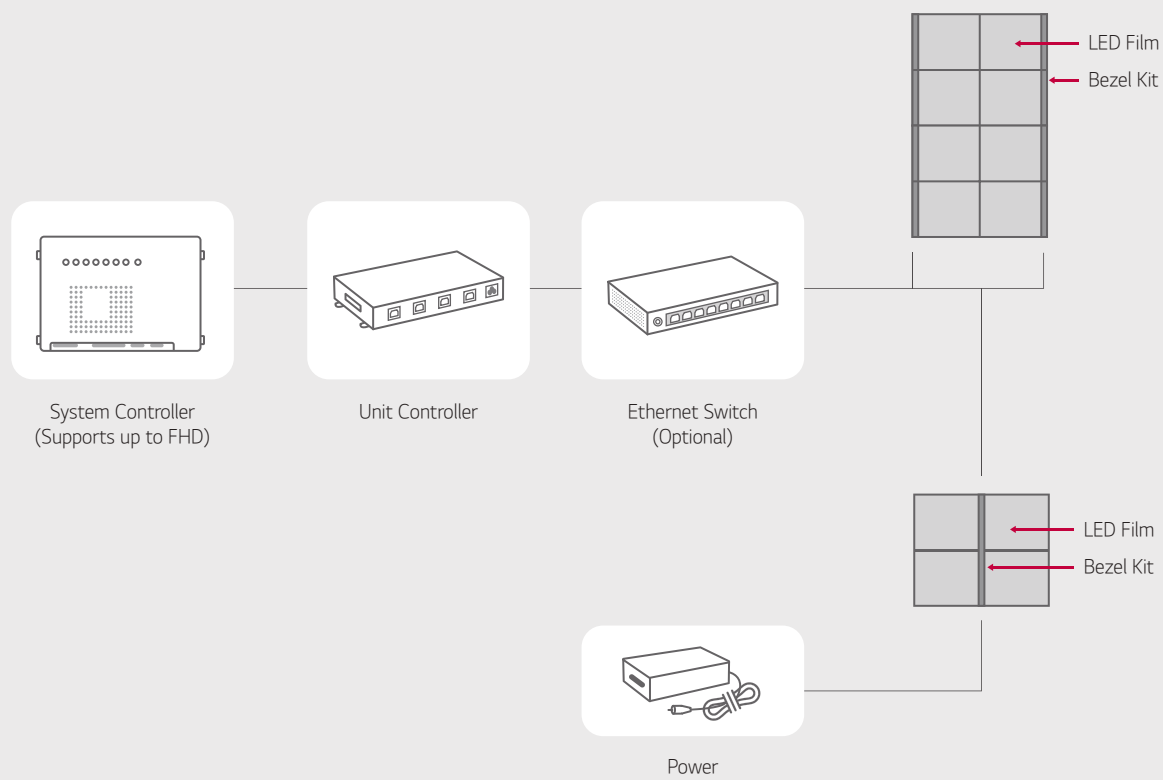

* The actual system structure may be subject to change from the above example.

1st Bezel Kit

ACC-LATB2

Dimension (W × H × D)	547.3 × 63 × 24 mm
Weight	0.45 kg

Common Bezel Kit

ACC-LATB3

Dimension (W × H × D)	479.5 × 28.1 × 24 mm
Weight	0.26 kg

Power (Bezel Kit & LED Film)

ACC-LATP1

Dimension (W × H × D)	183 × 86 × 28 mm
Weight	0.769 kg
Input	100-240V, 50-60Hz
Output	19.5V/10.8A (210W)
Color	White
DC Output Cable	14AWG, 1.5m

Unit Controller

LCLG012U

Resolution	960 × 540 (4 Unit Controllers Needed for FHD)
Interface	LVDS In, RJ45 (4ea) Out
Maximum Transmission Length	100 m
Dimension (W × H × D)	293 × 37 × 188.7 mm
Weight	1.5 kg
Power Consumption	20 W
Accessories	Power Cord, LVDS MCX Cable, ESG, Regulation Book, Warranty Card

System Controller

LCLG002

Video	DP: 3,840 × 2,160 @30Hz / HDMI: 3,840 × 2,160 @30Hz / DVI-D: 1,920 × 1,080 @60Hz
Input	HDMI, DP, DVI-D, RS232C (Phone Jack Type), RJ45 (w/o LED Indicator), IR Receiver (for installation), USB
Output	DP, RS232C, RJ45 (w/o LED Indicator), LVDS
Dimension (W × H × D)	293 × 40.1 × 193.3 mm
Weight (Head)	1.6 kg
Temperature Sensor	0
Light Sensor	0
Source Selection	HDMI, DVI-D, DP
TPC	Yes
Power Consumption	17 W
CMS S/W	Yes
Accessories	Power Cord, IR & Bright Sensor, 4P Phone-to-RS232C Gender, ESG, Regulation Book, Warranty Card



INDOOR LED SIGNAGE

Achieving Superb Picture Quality with Various Designs

Full model line-up, ranging from the Premium Fine-pitch series to the Curved series, LG Indoor LED Signage provides a variety of customizable options to fit into whatever spaces you need it to.

Uniform Picture Quality

Every step from production is strictly managed, while factory calibration ensures consistent quality between the LED units. The display provides seamless content with 97%* brightness uniformity.



* LAPE series: 95%


Vividness with Color Accuracy

LG's rigorous quality standards also make LG LED signage reproduce accurate colors, vividly displaying the original colors of objects without distortion.



16-Bit Color Processing


16-bit* color processing provides a higher greyscale level, which seamlessly displays different depths and densities of colors without distortion, thereby giving a more realistic and sophisticated content.

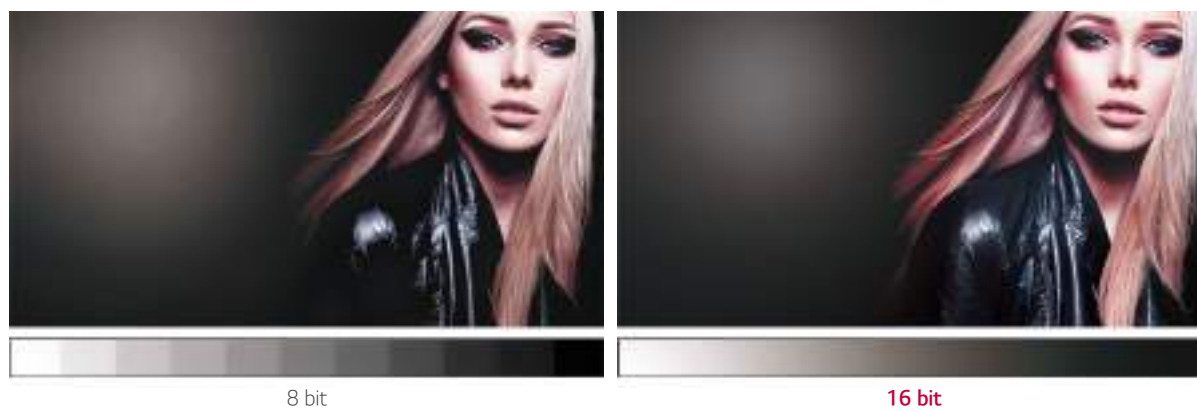

* Available for the LAPE/LAP Premium Fine-pitch, LAS Fine-pitch series

Reliable Operation with Signal/Power Redundancy

With an additional controller and power unit, a back-up controller activates if a signal transmission error occurs, preventing a screen blackout error (Signal Redundancy*). The product also offers Power Redundancy*. Two power units are provided in every LED unit; one activates to provide power when the other fails.

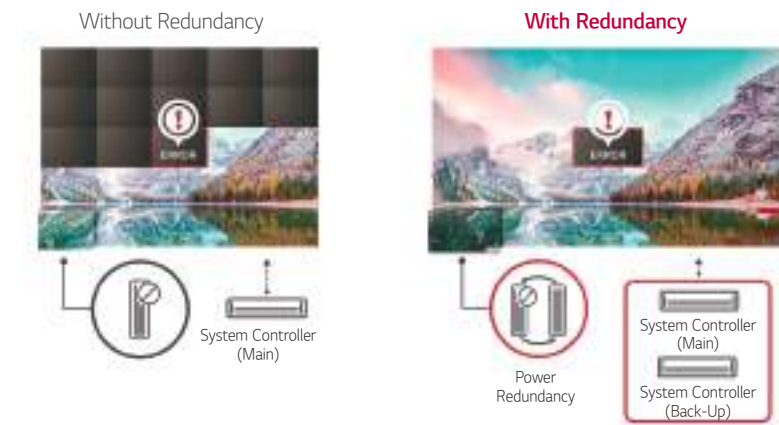

*Support may differ by model series

Real-Time 365 Care Service

The maintenance gets easier and faster with an optional service Signage 365 Care*, a cloud service solution provided by LG service. It remotely manages status of LED displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of a client's business.



* The availability of "Signage 365 Care" service can differ by region, model series.

RoHS Certified Safe Product

Boasting RoHS certification, all LG LED signage models are environment-friendly products that do not use materials harmful to the environment and people.





Premium Fine-pitch
LAP/LAPE Series

- Pixel pitch: 1.5 / 2.0 / 2.5 mm (LAP)
- Brightness (After calibration): 1,000 cd/m²*
- Serviceability: Front and rear (LAP: rear only)
- Remote power and embedded power

* Embedded power model: 700 cd/m²

130" All-in-one Screen
LAAF Series

- Pixel pitch: 1.5 mm
- Brightness (After calibration): 500 cd/m²
- 130" single-set design (FHD)
- Built-in controller and PSU (Power Supply Unit)
- Embedded sound



Fine-pitch
LAS Series

- Pixel pitch: 1.26 / 1.45 / 1.58 / 1.89 / 2.52 mm
- Brightness (After calibration): 600 cd/m²
- Serviceability: Front
- Cableless installation

* Models may vary by region. Check with local sales for availability.



Standard
LAS Series

- Pixel pitch: 2.5 / 3.9 mm
- Brightness (After calibration): 1,000 cd/m²
- Serviceability: Front
- Fast installation and teardown for rental solution

Standard
LAE / LAE-Q Series

- Pixel Pitch: 2.97 / 3.9 mm (LAE),
2.6 / 3.91 mm (LAE-Q)
- Brightness (After calibration): 1,200 cd/m²
- Serviceability: Front or rear
- Simple locking system
- Fast installation and teardown for rental solution (LAE only)



LAE Series

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Premium Fine-pitch LAP Series				
Remote Power Model				
Model Name		LAP015EL7B	LAP020EL7B	LAP025EL7B
Physical Parameters	Pixel Pitch (mm)	1.50	2.00	2.50
	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Module Resolution (W x H)	160 x 120	120 x 90	96 x 72
	Module Dimensions (W x H, mm)	240 x 180	240 x 180	240 x 180
	Weight per Module (kg)	0.36	0.36	0.36
	No. of Modules per Unit Case (W x H)	2 x 3	2 x 3	2 x 3
	Unit Case Resolution (W x H)	320 x 360	240 x 270	192 x 216
	Unit Case Dimensions (W x H x D, mm)	480 x 540 x 53		
	Unit Case Surface Area (m ²)	0.260	0.260	0.260
	Weight per Unit Case (kg/unit)	6.0	6.0	6.0
	Weight per Square Meter (kg/m ²)	22.2	21.8	21.3
	Physical Pixel Density (pixels/m ²)	444,444	250,000	160,000
	Flatness of Unit Case (mm)	±0.2	±0.2	±0.2
	Unit Case Material	Die Casting Aluminum		
	Service Access	Front and Rear		
	Optical Parameters	Min. Brightness (After Calibration)	1,000 ¹⁾ cd/m ²	
Color Temperature		3,200 - 9,300	3,200 - 9,300	3,200 - 9,300
Visual Viewing Angle (Horizontal)		160	160	160
Visual Viewing Angle (Vertical)		140	140	140
Brightness Uniformity		95%	95%	95%
Color Uniformity		±0.015Cx, Cy	±0.015Cx, Cy	±0.015Cx, Cy
Contrast Ratio		6,000	6,000	6,000
Processing Depth (bit)		16 (HDR10)	16 (HDR10)	16 (HDR10)
Electrical Parameters	Power Consumption (W/Unit, Max.)	318	285	143
	Power Consumption (W/Unit, Avg.)	130	104	52
	Power Consumption (W/m ² , Max.)	1,225	1,100	550
	Power Supply (V)	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	3,840	3,840	3,840
Operation Conditions	Lifetime (Half Brightness, hrs) ²⁾	100,000	100,000	50,000
	Operating Temperature (°C)	0°C to + 40°C	0°C to + 40°C	0°C to + 40°C
	Operating Humidity	10-80% RH	10-80% RH	10-80% RH
Certification	EMC	FCC Class A / CE / KC		
	Environment	RoHS	RoHS	RoHS
Controller		LCLG003-A	LCLG003-A	LCLG003-B
Connectivity	Video Inputs	HDMI In, DP In, OPS In, USB		
	Control	RJ45 In, RS232C In/out		
	Special Features	HDR10, Temperature Sensor, Power Detection ADA Compliant, PSU Hot Swappable		
Optional Accessory	ACC-LAPPC06(DC PSU Cable 6m), ACC-LAPPC60(DC PSU Cable 60m)			

1) LED unit case (Except LED Controller)
2) Features from System Controller

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Premium Fine-pitch LAP Series				
Embedded Power Model				
Model Name		LAP015EL7BP	LAP020EL7BP	LAP025EL7BP
Physical Parameters	Pixel Pitch (mm)	1.50	2.00	2.50
	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Module Resolution (W x H)	160 x 120	120 x 90	96 x 72
	Module Dimensions (W x H, mm)	240 x 180	240 x 180	240 x 180
	Weight per Module (kg)	0.36	0.36	0.36
	No. of Modules per Unit Case (W x H)	2 x 3	2 x 3	2 x 3
	Unit Case Resolution (W x H)	320 x 360	240 x 270	192 x 216
	Unit Case Dimensions (W x H x D, mm)	480 x 540 x 105		
	Unit Case Surface Area (m ²)	0.259	0.259	0.259
	Weight per Unit Case (kg/unit)	10.1	10.1	10.1
	Weight per Square Meter (kg/m ²)	38.4	38.0	37.4
	Physical Pixel Density (pixels/m ²)	444,444	250,000	160,000
	Flatness of Unit Case (mm)	±0.2	±0.2	±0.2
	Unit Case Material	Die Casting Aluminum		
	Service Access	Front and Rear		
	Optical Parameters	Min. Brightness (After Calibration)	700 ¹⁾ cd/m ²	
Color Temperature		3,200 - 9,300	3,200 - 9,300	3,200 - 9,300
Visual Viewing Angle (Horizontal)		160	160	160
Visual Viewing Angle (Vertical)		140	140	140
Brightness Uniformity		95%	95%	95%
Color Uniformity		±0.015Cx, Cy	±0.015Cx, Cy	±0.015Cx, Cy
Contrast Ratio		6,000	6,000	6,000
Processing Depth (bit)		16 (HDR10)	16 (HDR10)	16 (HDR10)
Electrical Parameters	Power Consumption (W/Unit, Max.)	200	187	99
	Power Consumption (W/Unit, Avg.)	67	52	26
	Power Consumption (W/m ² , Max.)	770	720	380
	Power Supply (V)	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	3,840	3,840	3,840
Operation Conditions	Lifetime (Half Brightness, hrs) ²⁾	100,000	100,000	50,000
	Operating Temperature (°C)	0°C to + 40°C	0°C to + 40°C	0°C to + 40°C
	Operating Humidity	10-80% RH	10-80% RH	10-80% RH
Certification	EMC	FCC Class A / CE / KC		
	Environment	RoHS	RoHS	RoHS
Controller		LCLG005-A	LCLG005-A	LCLG005-B
Connectivity	Video Inputs	HDMI In, DP In, OPS In, USB		
	Control	RJ45 In, RS232C In/out		
	Special Features	HDR10, Temperature Sensor, Power Detection		
Optional Accessory	N/A			

1) LDM + Unit Frame + Power Gender (Except LED Controller, System Controller, PSU)
2) LDM + Unit Frame + Power Pack (Except LED Controller, System Controller)
3) Features from System Controller

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

All-in-one Fine-pitch Screen
LAAF Series

Model Name		LAA015FL6B1
Physical Parameters	Pixel Configuration	3 in 1 SMD
	Pixel Pitch (mm)	1.50
	Screen Resolution (WxH)	1,920x1,080
	Screen Dimension (W x H x D,mm)	2,880 x 1,620 x 128.5 (w/o Screen Frame)
	Screen Weight (kg)	175 (w/o Screen Frame)
	No. of Unit Case per Screen (WxH)	3 x 3
	No. of Modules per Unit Case (WxH)	4 x 3
	Unit Case Resolution (WxH)	640 x 360
	Unit Case Dimensions (WxHxD, mm)	960 x 540 x 128.5
	Unit Case Surface Area (m ²)	0.52
	Weight per Unit Case (kg/unit)	Master: 20.85, Slave: 19.24
	Weight per Square Meter (kg/m ²)	37.6
	Physical Pixel Density (pixels/m ²)	444,444
	Flatness of Unit Case (mm)	±0.2
	Unit Case Material	Front : Die Casting Aluminum, Rear : PC+ABS
Service Access	Front and Rear	
Optical Specifications	Max. Brightness	500 cd/m ²
	Color Temperature	6,500
	Visual Viewing Angle (Horizontal)	160
	Visual Viewing Angle (Vertical)	140
	Brightness Uniformity	95%
	Color Uniformity	±0.015Cx,Cy
	Contrast Ratio	5,000
Processing Depth (bit)	16 (HDR10, HDR10 Pro ¹⁾)	
Electrical Specifications	Power Consumption (W/Screen, Max.)	2,900
	Power Consumption (W/Screen, Avg.)	980
	Power Consumption (W/m ² , Max.)	622
	Power Supply (V)	100 to 240
	Frame Rate (Hz)	50 / 60
	Refresh Rate (Hz)	3,840
Operation Specifications	LED Lifetime (Half Brightness) ²⁾	100,000
	Operating Temperature (°C)	0° to +40°
	Operating Humidity	10-80% RH
Connectivity (Embedded Controller)	Video Inputs	HDMI In(3), DP In, USB 2.0
	Control	RJ45 In, RS232C In/Out
	Special Features	Temperature Sensor, Ambient Light Sensor, Crestron Connected ³⁾
SW	Platform	webOS 4.0
	Support	Signage365Care ⁴⁾ , SuperSign CMS
Certification	IEC 60950-1/ EN 60950-1/ UL 60950-1 FCC Class A / CE / KC	
Environment	RoHS	
Basic Accessory	Data Cable, LAN Cable, Power Cord, RS232C Gender (9pin to Phone Jack), Remote Controller, IR Receiver, Manual	

1) HDR10 Pro is LG's own HDR solution to process HDR signal by using enhanced dynamic tone mapping.
 2) The Lifetime (Half brightness) spec is subject to LED package spec.
 3) Network based control
 4) The availability differs by region

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Fine-pitch
LAS Series

Model Name		LAS012DB2-F	LAS012DB4-F	LAS012DB7-F	LAS015DB2-F	LAS015DB4-F
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	1.26	1.26	1.26	1.575	1.575
	Module Resolution (W x H)	240 x 135	240 x 135	240 x 135	192 x 108	192 x 108
	Module Dimensions (W x H, mm)	302.4 x 170.1	302.4 x 170.1	302.4 x 170.1	302.4 x 170.1	302.4 x 170.1
	Weight per Module (kg)	0.52	0.52	0.52	0.52	0.52
	No. of Modules per Unit Case (W x H)	2 x 2	2 x 2	2 x 2	2 x 2	2 x 2
	Unit Case Resolution (W x H)	480 x 270	480 x 270	480 x 270	384 x 216	384 x 216
	Unit Case Dimensions (W x H x D, mm)	604.8 x 340.2 x 72.5	604.8 x 340.2 x 72.5	604.8 x 340.2 x 72.5	604.8 x 340.2 x 72.5	604.8 x 340.2 x 72.5
	Unit Case Surface Area (m ²)	0.206	0.206	0.206	0.206	0.206
	Weight per Unit Case (kg/unit)	5.2	5.2	5.2	5.2	5.2
	Weight per Square Meter (kg/m ²)	25.3	25.3	25.3	25.3	25.3
	Physical Pixel Density (pixels/m ²)	629,882	629,882	629,882	403,124	403,124
	Unit Case Material	Die Casting Magnesium	Die Casting Magnesium	Die Casting Magnesium	Die Casting Magnesium	Die Casting Magnesium
	Service Access	Front	Front	Front	Front	Front
	Optical Specifications	Brightness (After Calibration)	600cd/m ²	600cd/m ²	600cd/m ²	600cd/m ²
Color Temperature		3,000 - 10,000	3,000 - 10,000	3,000 - 10,000	3,000 - 10,000	3,000 - 10,000
Viewing Angle (H x V)		160 x 140	160 x 140	160 x 140	160 x 140	160 x 140
Brightness Uniformity		97%	97%	97%	97%	97%
Color Uniformity		±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy
Contrast Ratio		7,000	7,000	7,000	7,000	7,000
Processing Depth (bit)		16	16	16	16	16
Electrical Specifications	Power Consumption (W/Unit, Avg.)	54	54	54	54	54
	Power Consumption (W/Unit, Max.)	180	180	180	180	180
	Power Consumption (W/m ² , Max.)	874	874	874	874	874
	Power Supply (V)	100 to 240	100 to 240	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	3,000	3,000	3,000	3,000	3,000
Operation Specifications	Lifetime (Half brightness)	100,000	50,000	100,000	100,000	50,000
	Operating Temperature (°C)	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C
	Operating Humidity	10 - 80% RH	10 - 80% RH	10 - 80% RH	10 - 80% RH	10 - 80% RH
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS	RoHS	RoHS	RoHS

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Fine-pitch LAS Series						
Model Name		LAS015DB7-F	LAS018DB4-F	LAS018DB7-F	LAS025DB4-F	LAS025DB7-F
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	1.575	1.89	1.89	2.52	2.52
	Module Resolution (W × H)	192 × 108	160 × 90	160 × 90	120 × 68	120 × 68
	Module Dimensions (W × H, mm)	302.4 × 170.1	302.4 × 170.1	302.4 × 170.1	302.4 × 170.1	302.4 × 170.1
	Weight per Module (kg)	0.52	0.52	0.52	0.52	0.52
	No. of Modules per Unit Case (W × H)	2 × 2	2 × 2	2 × 2	2 × 2	2 × 2
	Unit Case Resolution (W × H)	384 × 216	320 × 180	320 × 180	240 × 136	240 × 136
	Unit Case Dimensions (W × H × D, mm)	604.8 × 340.2 × 72.5	604.8 × 340.2 × 72.5	604.8 × 340.2 × 72.5	604.8 × 340.2 × 72.5	604.8 × 340.2 × 72.5
	Unit Case Surface Area (m ²)	0.206	0.206	0.206	0.206	0.206
	Weight per Unit Case (kg/unit)	5.2	5.2	5.2	5.2	5.2
	Weight per Square Meter (kg/m ²)	25.3	25.3	25.3	25.3	25.3
	Physical Pixel Density (pixels/m ²)	403,124	279,947	279,947	158,637	158,637
	Unit Case Material	Die Casting Magnesium	Die Casting Magnesium	Die Casting Magnesium	Die Casting Magnesium	Die Casting Magnesium
	Service Access	Front	Front	Front	Front	Front
	Optical Specifications	Brightness (After Calibration)	600cd/m ²	600cd/m ²	600cd/m ²	600cd/m ²
Color Temperature		3,000 - 10,000	3,000 - 10,000	3,000 - 10,000	3,000 - 10,000	3,000 - 10,000
Viewing Angle (H × V)		160 × 140	160 × 140	160 × 140	160 × 140	160 × 140
Brightness Uniformity		97%	97%	97%	97%	97%
Color Uniformity		±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy
Contrast Ratio		7,000	7,000	7,000	7,000	7,000
Processing Depth (bit)		16	16	16	16	16
Electrical Specifications	Power Consumption (W/Unit, Avg.)	54	54	54	54	54
	Power Consumption (W/Unit, Max.)	180	180	180	180	180
	Power Consumption (W/m ² , Max.)	874	874	874	874	874
	Power Supply (V)	100 to 240	100 to 240	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	3,000	3,000	3,000	3,000	3,000
Operation Specifications	Lifetime (Half brightness)	100,000	50,000	100,000	50,000	100,000
	Operating Temperature (°C)	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C	-10°C to +40°C
	Operating Humidity	10 - 80% RH	10 - 80% RH	10 - 80% RH	10 - 80% RH	10 - 80% RH
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS	RoHS	RoHS	RoHS

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Standard LAS Series			
Model Name		LAS025DB4-V	LAS039DB4-V
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	2.50	3.90
	Module Resolution (W × H)	100 × 100	64 × 64
	Module Dimensions (W × H, mm)	250 × 250	250 × 250
	Weight per Module (kg)	0.54	0.54
	No. of Modules per Unit Case (W × H)	2 × 2	2 × 2
	Unit Case Resolution (W × H)	200 × 200	128 × 128
	Unit Case Dimensions (W × H × D, mm)	500 × 500 × 74	500 × 500 × 74
	Unit Case Surface Area (m ²)	0.250	0.250
	Weight per Unit Case (kg/unit)	7.0	7.0
	Weight per Square Meter (kg/m ²)	28.0	28.0
	Physical Pixel Density (pixels/m ²)	160,000	65,536
	Flatness of Unit Case (mm)	±0.5	±0.5
	Unit Case Material	Magnesium Alloy	Magnesium Alloy
	Service Access	Front	Front
Optical Specifications	Brightness (After Calibration)	1,000 cd/m ²	1,000 cd/m ²
	Color Temperature	3,000 - 10,000	3,000 - 10,000
	Viewing Angle (H × V)	120 × 110	120 × 110
	Brightness Uniformity	≥97%	≥97%
	Color Uniformity	TBA	TBA
	Contrast Ratio	> 8,000:1	> 8,000:1
	Processing Depth (bit)	TBA	TBA
Electrical Specifications	Power Consumption (W/Unit, Avg.)	TBA	TBA
	Power Consumption (W/Unit, Max.)	188	188
	Power Consumption (W/m ² , Max.)	750	750
	Power Supply (V)	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60
	Refresh Rate (Hz)	3,000	3,000
Operation Specifications	Lifetime (Half brightness)	80,000	80,000
	Operating Temperature (°C)	-10°C to +40°C	-10°C to +40°C
	Operating Humidity	10 - 80%RH	10 - 80%RH
	IP rating Front	IP30	IP30
	IP rating Rear	IP30	IP30
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS
Controller	LCLY006HD		LCLY006HD

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

		Standard LAE Series	
Model Name		LAE029DD4DE	LAE029DD4E
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	2.97	2.97
	Module Resolution (W × H)	84 × 168	84 × 168
	Module Dimensions (W × H, mm)	250 × 500	250 × 500
	Weight per Module (kg)	1.20	1.20
	No. of Modules per Unit Case (W × H)	2 × 1	2 × 2
	Unit Case Resolution (W × H)	168×168	168 × 336
	Unit Case Dimensions (W × H × D, mm)	500 × 500 × 68	500 × 1,000 × 68
	Unit Case Surface Area (m ²)	0.250	0.500
	Weight per Unit Case (kg/unit)	8.2	12.5
	Weight per Square Meter (kg/m ²)	32.8	25.0
	Physical Pixel Density (pixels/m ²)	112,896	112,896
	Flatness of Unit Case (mm)	±0.3	±0.3
	Unit Case Material	Magnesium	Magnesium
	Service Access	Front or Rear	Front or Rear
Optical Specifications	Brightness (After Calibration)	1,200 cd/m ²	1,200 cd/m ²
	Color Temperature	6,500	6,500
	Viewing Angle (H × V)	160 × 160	160 × 160
	Brightness Uniformity	97%	97%
	Color Uniformity	±0.003CxCy	±0.003CxCy
	Contrast Ratio	5,000	5,000
	Processing Depth (bit)	14	14
Electrical Specifications	Power Consumption (W/Unit, Avg.)	53	110
	Power Consumption (W/Unit, Max.)	160	330
	Power Consumption (W/m ² , Max.)	640	660
	Power Supply (V)	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60
	Refresh Rate (Hz)	1,920	1,920
Operation Specifications	Lifetime (Half brightness)	50,000	50,000
	Operating Temperature (°C)	-10°C to +45°C	-10°C to +45°C
	Operating Humidity	0 - 80%RH	0 - 80%RH
	IP rating Front	IP30	IP30
IP rating Rear	IP30	IP30	
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS
Controller		LCIN006	LCIN006

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

		Standard LAE Series		Standard LAE-Q Series
Model Name		LAE039DD4D	LAE039DD4	LAE026DD4-Q
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	3.90	3.90	2.60
	Module Resolution (W × H)	64 × 128	64 × 128	192 × 48
	Module Dimensions (W × H, mm)	250 × 500	250 × 500	500 × 125
	Weight per Module (kg)	1.20	1.20	0.71
	No. of Modules per Unit Case (W × H)	2 × 1	2 × 2	1 × 4
	Unit Case Resolution (W × H)	128 × 128	128 × 256	192 × 192
	Unit Case Dimensions (W × H × D, mm)	500 × 500 × 68	500 × 1,000 × 68	500 × 500 × 81
	Unit Case Surface Area (m ²)	0.250	0.500	0.250
	Weight per Unit Case (kg/unit)	8.2	12.5	7.5
	Weight per Square Meter (kg/m ²)	32.8	25.8	30.0
	Physical Pixel Density (pixels/m ²)	65,536	65,536	147,456
	Flatness of Unit Case (mm)	±0.3	±0.3	±0.3mm
	Unit Case Material	Magnesium	Magnesium	Aluminum
	Service Access	Front or Rear	Front or Rear	Front or Rear
Optical Specifications	Brightness (After Calibration)	1,200 cd/m ²	1,200 cd/m ²	1,200 cd/m ²
	Color Temperature	6,500	6,500	6,500
	Viewing Angle (H × V)	160 × 160	160 × 160	160 × 160
	Brightness Uniformity	97%	97%	97%
	Color Uniformity	±0.003CxCy	±0.003CxCy	±0.003CxCy
	Contrast Ratio	5,000	5,000	5,000
	Processing Depth (bit)	14	14	13
Electrical Specifications	Power Consumption (W/Unit, Avg.)	53	53	56
	Power Consumption (W/Unit, Max.)	160	160	168
	Power Consumption (W/m ² , Max.)	640	660	672
	Power Supply (V)	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	3,840	3,840	1,920
Operation Specifications	Lifetime (Half brightness)	50,000	50,000	50,000
	Operating Temperature (°C)	-10°C to +45°C	-10°C to +45°C	-10°C to +45°C
	Operating Humidity	0 - 80%RH	0 - 80%RH	0 - 80%RH
	IP rating Front	IP30	IP30	IP30
IP rating Rear	IP30	IP30	IP30	
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS	RoHS
Controller		LCIN006	LCIN006	LCIN006



OUTDOOR LED SIGNAGE

Offering Outstanding Visual Impact with High Durability

Diverse models available in a range of IP rated casing designs for outdoor applications including stadiums, malls, etc. for advertisements and public displays.

Uniform Picture Quality

Every step from production is strictly managed, while factory calibration ensures consistent quality between the LED units. The display provides seamless content with 97% brightness uniformity.



Vividness with Color Accuracy

LG's rigorous quality standards also make LG LED signage reproduce accurate colors, vividly displaying the original colors of objects without distortion.



Outstanding Visibility

Offering powerful max. 8,000 cd/m² brightness, this super-bright display excels outdoors even in direct sunlight, instantly captivating attention and effectively delivering content.




Smooth Playback in Dynamic Motion

A high refresh rate of max. 4,000Hz ensures smooth playback. Flicker-free images prevent the black bars that appear in video recordings, as well as viewer eye strain and blurred vision.



Reliable Weatherproof Design

The design of the front and back of the LED cabinet has IP-rated durability. This keeps it resistant to dust and moisture penetration, allowing stable operation unaffected by weather and harmful outdoor environments.

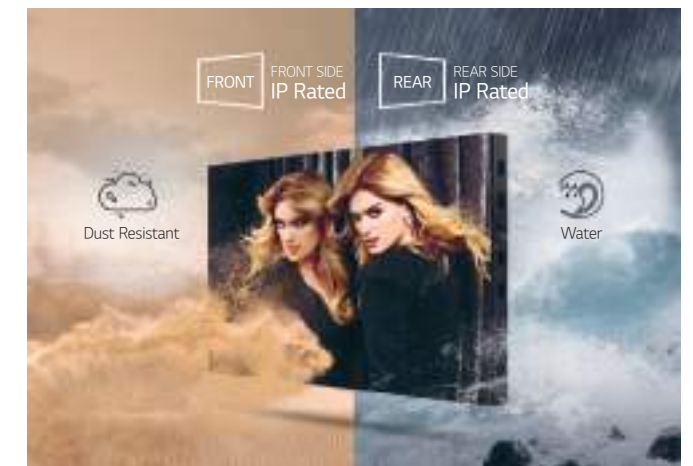

RoHS Certified Safe Product

Boasting RoHS certification, all LG LED signage models are environment-friendly products that do not use materials harmful to the environment and people.





**Stadium
LBS Series**

- Pixel pitch: 6.0 / 8.0 / 10.7 / 12.0 / 16.0 mm
- Brightness (After calibration): 6,000 cd/m²
- IP (Front/rear): IP65/54 (LBF160DA1D: IP65/43)
- Refresh rate: 4,000Hz

**Standard
LBE Series**

- Pixel pitch: 3.91 / 4.63 / 6.94 mm
- Brightness (After calibration): 5,500 cd/m² (LBE039/046/069DD3(D))
5,000 cd/m² (LBE039/046/069DD4(D))
- IP (Front/rear): IP65/54
- Lightweight and slim design
- Easy installation and teardown for rental solution



*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

		Standard LBE Series				
Model Name		LBE040DD4	LBE080DD3	LBE080DD4	LBE100DD3	LBE100DD4
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	4.00	8.00	8.00	10.00	10.00
	Module Resolution (W x H)	80 x 60	40 x 30	40 x 30	32 x 24	32 x 24
	Module Dimensions (W x H, mm)	320 x 240	320 x 240	320 x 240	320 x 240	320 x 240
	Weight per Module (kg)	1.30	1.30	1.30	1.30	1.30
	No. of Modules per Unit Case (W x H)	2x3	2 x 3	2 x 3	2 x 3	2 x 3
	Unit Case Resolution (W x H)	160 x 180	80 x 90	80 x 90	64 x 72	64 x 72
	Unit Case Dimensions (W x H x D, mm)	640 x 720 x 90	640 x 720 x 90	640 x 720 x 90	640 x 720 x 90	640 x 720 x 90
	Unit Case Surface Area (m ²)	0.461	0.461	0.461	0.461	0.461
	Weight per Unit Case (kg/unit)	17.0	17.0	17.0	17.0	17.0
	Weight per Square Meter (kg/m ²)	36.9	36.9	36.9	36.9	36.9
	Physical Pixel Density (pixels/m ²)	62,500	15,625	15,625	10,000	10,000
	Flatness of Unit Case (mm)	±0.5	±0.5	±0.5	±0.5	±0.5
	Unit Case Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
Service Access	Rear	Front or Rear	Front or Rear	Front or Rear	Front or Rear	
Optical Specifications	Brightness (After Calibration)	5,000 cd/m ²	5,500 cd/m ²	5,000 cd/m ²	5,500 cd/m ²	5,000 cd/m ²
	Color Temperature	6,500	6,500	6,500	6,500	6,500
	Viewing Angle (H x V)	160 x 120	160 x 120	160 x 120	160 x 120	160 x 120
	Brightness Uniformity	≥97%	≥97%	≥97%	≥97%	≥97%
	Color Uniformity	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy	±0.003Cx,Cy
	Contrast Ratio	5,000	5,000	5,000	5,000	5,000
	Processing Depth (bit)	14	14	14	14	14
Electrical Specifications	Power Consumption (W/Unit, Avg.)	120	100	100	100	100
	Power Consumption (W/Unit, Max.)	360	300	300	300	300
	Power Consumption (W/m ² , Max.)	780	650	650	650	650
	Power Supply (V)	100 to 240	100 to 240	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	3,840	3,840	3,840	3,840	3,840
Operation Specifications	Lifetime (Half brightness)	50,000	80,000	50,000	80,000	50,000
	Operating Temperature (°C)	-10°C to +45°C	-10°C to +45°C	-10°C to +45°C	-10°C to +45°C	-10°C to +45°C
	Operating Humidity	0 - 80%RH	0 - 80%RH	0 - 80%RH	0 - 80%RH	0 - 80%RH
	IP rating Front	IP65	IP65	IP65	IP65	IP65
IP rating Rear	IP54	IP54	IP54	IP54	IP54	
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS	RoHS	RoHS	RoHS
Controller		LCIN006	LCIN006	LCIN006	LCIN006	LCIN006

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

		Standard LBE Series
Model Name		LBE039DD4
Physical Parameters	Pixel Configuration	3 in 1 SMD
	Pixel Pitch (mm)	3.91
	Module Resolution (W × H)	64 × 128
	Module Dimensions (W × H, mm)	250 × 500
	Weight per Module (kg)	1.80
	No. of Modules per Unit Case (W × H)	2 × 2
	Unit Case Resolution (W × H)	128 × 256
	Unit Case Dimensions (W × H × D, mm)	500 × 1,000 × 68
	Unit Case Surface Area (m ²)	0.500
	Weight per Unit Case (kg/unit)	12.0
	Weight per Square Meter (kg/m ²)	24.0
	Physical Pixel Density (pixels/m ²)	65,536
	Flatness of Unit Case (mm)	±0.5
	Unit Case Material	Magnesium
	Service Access	Front or Rear
Optical Specifications	Brightness (After Calibration)	5,000 cd/m ²
	Color Temperature	6,500
	Viewing Angle (H × V)	160 × 120
	Brightness Uniformity	97%
	Color Uniformity	±0.003CxCy
	Contrast Ratio	5,000
	Processing Depth (bit)	14
Electrical Specifications	Power Consumption (W/Unit, Avg.)	110
	Power Consumption (W/Unit, Max.)	330
	Power Consumption (W/m ² , Max.)	660
	Power Supply (V)	100 to 240
	Frame Rate (Hz)	50 / 60
	Refresh Rate (Hz)	3,840
Operation Specifications	Lifetime (Half brightness)	50,000
	Operating Temperature (°C)	-10°C to +45°C
	Operating Humidity	0 - 80%RH
	IP rating Front	IP65
	IP rating Rear	IP54
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	Environment	RoHS
Controller		LCIN006

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

		Standard LBE Series
Model Name		LBE069DD4
Physical Parameters	Pixel Configuration	3 in 1 SMD
	Pixel Pitch (mm)	6.94
	Module Resolution (W × H)	36 × 72
	Module Dimensions (W × H, mm)	250 × 500
	Weight per Module (kg)	1.80
	No. of Modules per Unit Case (W × H)	2 × 2
	Unit Case Resolution (W × H)	72 × 72
	Unit Case Dimensions (W × H × D, mm)	500 × 1,000 × 68
	Unit Case Surface Area (m ²)	0.500
	Weight per Unit Case (kg/unit)	12.0
	Weight per Square Meter (kg/m ²)	24.0
	Physical Pixel Density (pixels/m ²)	20,736
	Flatness of Unit Case (mm)	±0.5
	Unit Case Material	Magnesium
	Service Access	Rear
Optical Specifications	Brightness (After Calibration)	5,000 cd/m ²
	Color Temperature	6,500
	Viewing Angle (H × V)	160 × 120
	Brightness Uniformity	97%
	Color Uniformity	±0.003CxCy
	Contrast Ratio	5,000
	Processing Depth (bit)	14
Electrical Specifications	Power Consumption (W/Unit, Avg.)	110
	Power Consumption (W/Unit, Max.)	330
	Power Consumption (W/m ² , Max.)	660
	Power Supply (V)	100 to 240
	Frame Rate (Hz)	50 / 60
	Refresh Rate (Hz)	3,840
Operation Specifications	Lifetime (Half brightness)	50,000
	Operating Temperature (°C)	-10°C to +45°C
	Operating Humidity	0 - 80%RH
	IP rating Front	IP65
	IP rating Rear	IP54
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC
	Environment	RoHS
Controller		LCIN006

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Stadium LBS Series					
	Model Name	LBS060DA1D	LBS060DA3D	LBS080DA1D	LBS080DA3D
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	6.00	6.00	8.00	8.00
	Module Resolution (W x H)	32 x 32	32 x 32	24 x 24	24 x 24
	Module Dimensions (W x H, mm)	192 x 192	192 x 192	192 x 192	192 x 192
	Weight per Module (kg)	0.54	0.54	0.57	0.57
	No. of Modules per Unit Case (W x H)	6 x 4	6 x 4	8 x 8	8 x 8
	Unit Case Resolution (W x H)	192 x 128	192 x 128	192 x 192	192 x 192
	Unit Case Dimensions (W x H x D, mm)	1,152 x 768 x 217	1,152 x 768 x 217	1,536 x 1,536 x 222	1,536 x 1,536 x 222
	Unit Case Surface Area (m ²)	0.885	0.885	2.359	2.359
	Weight per Unit Case (kg/unit)	42.0	42.0	104.0	104.0
	Weight per Square Meter (kg/m ²)	47.5	47.5	44.1	44.1
	Physical Pixel Density (pixels/m ²)	27,777	27,777	15,625	15,625
	Flatness of Unit Case (mm)	±1.0	±1.0	±1.0	±1.0
	Unit Case Material	Aluminum	Aluminum	Aluminum	Aluminum
	Service Access	Front or Rear	Front or Rear	Front and Rear	Front and Rear
Optical Specifications	Brightness (After Calibration)	6,000 cd/m ²	6,000 cd/m ²	6,000 cd/m ²	6,000 cd/m ²
	Color Temperature	3,500 - 8,500	3,500 - 8,500	3,500 - 8,500	3,500 - 8,500
	Viewing Angle (H x V)	160 x 135	160 x 135	160 x 135	160 x 135
	Brightness Uniformity	≥97%	≥97%	≥97%	≥97%
	Color Uniformity	±0.05Cx,Cy	±0.05Cx,Cy	±0.05Cx,Cy	±0.05Cx,Cy
	Contrast Ratio	3,000	3,000	3,000	3,000
	Processing Depth (bit)	16	16	16	16
Electrical Specifications	Power Consumption (W/Unit, Avg.)	240	232	584	552
	Power Consumption (W/Unit, Max.)	600	580	1,460	1,380
	Power Consumption (W/m ² , Max.)	678	656	619	585
	Power Supply (V)	100 to 240	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	4,000	4,000	4,000	4,000
Operation Specifications	Lifetime (Half brightness)	100,000	100,000	100,000	100,000
	Operating Temperature (°C)	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C
	Operating Humidity	< 90%RH	< 90%RH	< 90%RH	< 90%RH
	IP rating Front	IP65	IP65	IP65	IP65
	IP rating Rear	IP54	IP54	IP54	IP54
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS	RoHS	RoHS
Controller		LCLH001	LCLH001	LCLH001	LCLH001

*Specifications are subject to change without notice and the lifetime (Half brightness) spec is subject to LED package spec.

Stadium LBS Series					
	Model Name	LBS100DA1D	LBS100DA3D	LBS120DA1D	LBS120DA3D
Physical Parameters	Pixel Configuration	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD	3 in 1 SMD
	Pixel Pitch (mm)	10.70	10.70	12.00	12.00
	Module Resolution (W x H)	18 x 18	18 x 18	16 x 16	16 x 16
	Module Dimensions (W x H, mm)	192 x 192	192 x 192	192 x 192	192 x 192
	Weight per Module (kg)	0.56	0.56	0.56	0.56
	No. of Modules per Unit Case (W x H)	8 x 8	8 x 8	8 x 8	8 x 8
	Unit Case Resolution (W x H)	144 x 144	144 x 144	128 x 128	128 x 128
	Unit Case Dimensions (W x H x D, mm)	1,536 x 1,536 x 222	1,536 x 1,536 x 222	1,536 x 1,536 x 223	1,536 x 1,536 x 223
	Unit Case Surface Area (m ²)	2.359	2.359	2.359	2.359
	Weight per Unit Case (kg/unit)	104.0	104.0	104.0	104.0
	Weight per Square Meter (kg/m ²)	44.1	44.1	44.1	44.1
	Physical Pixel Density (pixels/m ²)	8,789	8,789	6,944	6,944
	Flatness of Unit Case (mm)	±1.0	±1.0	±1.0	±1.0
	Unit Case Material	Aluminum	Aluminum	Aluminum	Aluminum
	Service Access	Front and Rear	Front and Rear	Front and Rear	Front and Rear
Optical Specifications	Brightness (After Calibration)	6,000 cd/m ²	6,000 cd/m ²	6,000 cd/m ²	6,000 cd/m ²
	Color Temperature	3,500 - 8,500	3,500 - 8,500	3,500 - 8,500	3,500 - 8,500
	Viewing Angle (H x V)	160 x 145	160 x 145	160 x 125	160 x 125
	Brightness Uniformity	≥97%	≥97%	≥97%	≥97%
	Color Uniformity	±0.05Cx,Cy	±0.05Cx,Cy	±0.05Cx,Cy	±0.05Cx,Cy
	Contrast Ratio	3,000	3,000	3,000	3,000
	Processing Depth (bit)	16	16	16	16
Electrical Specifications	Power Consumption (W/Unit, Avg.)	616	580	620	584
	Power Consumption (W/Unit, Max.)	1,540	1,450	1,550	1,460
	Power Consumption (W/m ² , Max.)	653	615	657	619
	Power Supply (V)	100 to 240	100 to 240	100 to 240	100 to 240
	Frame Rate (Hz)	50 / 60	50 / 60	50 / 60	50 / 60
	Refresh Rate (Hz)	4,000	4,000	4,000	4,000
Operation Specifications	Lifetime (Half brightness)	100,000	100,000	100,000	100,000
	Operating Temperature (°C)	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C	-20°C to +50°C
	Operating Humidity	< 90%RH	< 90%RH	< 90%RH	< 90%RH
	IP rating Front	IP65	IP65	IP65	IP65
	IP rating Rear	IP54	IP54	IP54	IP54
Certification	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	Environment	RoHS	RoHS	RoHS	RoHS
Controller		LCLH001	LCLH001	LCLH001	LCLH001



HIGH BRIGHTNESS

Outstanding Visibility with Reliable Performance

With superior picture quality and excellent durability, the display's eye-catching content will captivate customers even under direct sunlight or extreme environmental fluctuations.

Captivating High Brightness

LG high brightness displays provide a variety of options, from window-facing to outdoor floor-standing displays, tailored to the requirements of each space. No matter where they are installed, the visual impact they bring maximizes advertising effectiveness by catching the attention of passersby.



☀️ 4,000 - 1,500 cd/m²

Visible with Polarized Sunglasses

QWP (Quarter Wave Plate) is applied, which enables clear visibility even when the viewer is wearing polarized sunglasses.



Auto Brightness Control

The screen brightness is automatically adjusted depending on the ambient light. The brightness is increased in light for better visibility, while it is decreased in darkness for efficient power management.



Auto Brightness

Conformal Coating

The product can be often unavoidably exposed to dust and water during maintenance. Conformal coating on every major circuit board eliminates such troubles by protecting it against dust, iron powder, humidity, etc.



Wide Range of Operating Temperature

The panel offers superb reliability under a wide range of operating temperatures*, so LG high brightness displays requires fewer constraints for installation, reducing additional costs for air conditioning system.



* The operating temperatures vary by model series.

Secured Protection with IP56 Design

Sealed with IP56* design for reliable operation, it is not only water proof but also weatherproof against the damaging effects of sun, rain, snow, dust and wind, an essential feature for outdoor application.



* Exclusive to the XE series



webOS
Window Facing
75XS2E

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 2,500 cd/m²
- Fan-less design for noise reduction
- Conformal coating on every circuit board

webOS
Window Facing
55/49XS4F

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 4,000 cd/m²
- Operating temperature: 0°C to 40°C
- Conformal coating on every circuit board



webOS
Open Frame
75XF3C, 55XF3E

- Ultra HD: 3,840 × 2,160 (75")
Full HD: 1,920 × 1,080 (55")
- Brightness (Typ.): 3,000 cd/m²
- Operating temperature: 0°C to 50°C
- Conformal coating on every circuit board



webOS
Outdoor Display
86XE3FS

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 3,000 cd/m²
- Operating temperature: -30°C to 50°C
- IP56 design
- Advanced thermal management (Filter-less)
- Smart brightness compensation
- Conformal coating on every circuit board

webOS
Outdoor Display
55/49XE4F

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 4,000 cd/m²
- Operating temperature: -30°C to 50°C
- Slim and lightweight design for easy installation
- IP56 design
- Advanced thermal management (Filter-less)
- Conformal coating on every circuit board



* Models may vary by region. Check with local sales for availability.

* Specifications are subject to change without notice

		75XS2E	55/49XS4F	
Panel	Screen Size	75"	55", 49"	
	Panel Technology	IPS, M+ (WRGB)	IPS, M+ (WRGB)	
	Aspect Ratio	16 : 9	16 : 9	
	Native Resolution	3,840 × 2,160 (UHD)	1,920 × 1,080 (FHD)	
	Brightness	2,500 cd/m ² (Typ.), 2,250 cd/m ² (Min.)	4,000 cd/m ² (Typ.), 3,200 cd/m ² (Min.)	
	Viewing Angle (H × V)	178 × 178	178 × 178	
	Surface Treatment	AGLR (Haze 3%), QWP	AGLR (Haze 3%), QWP	
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs	
	Operation Hours	24Hrs	24Hrs	
	Orientation	Landscape & Portrait	Landscape & Portrait	
	Connectivity	Input	HDMI(2), DP, DVI-D, Audio, USB, SD Card	HDMI(2), DP, DVI-D, Audio, USB
Output		DP, External Speaker	DP, External Speaker	
External Control		RS232C In/out, RJ45 (LAN) In, IR In	RS232C In/out, RJ45 (LAN) In, IR In	
Physical Specification	Bezel Color	Black	Black	
	Bezel Width	11.8 mm (Even)	55": 9.9 mm (L/R) / 12mm(T/B) 49": 6.5mm (L/R) / 9mm (T/B)	
	Monitor Dimension (W × H × D)	1,675.2 × 953.6 × 116 mm	55": 1,235.5 × 709.4 × 85.4 mm 49": 1,092.7 × 626.4 × 83.5 mm	
	Weight (Head)	43.0 kg	55": 25 kg, 49": 20.5 kg	
	VESA™ Standard Mount Interface	600 × 400 mm	600 × 400 mm	
Environment Conditions	Operation Temperature	0°C to 40°C (W/o Direct Sunlight, Direct Sunlight in Cooling System), 0°C to 30°C (Direct Sunlight)	0°C to 40°C(W/o Direct Sunlight, Direct Sunlight in Cooling System), 0°C to 30°C (Direct Sunlight)	
	Operation Humidity	10% to 80%	10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Type	Built-In Power	Built-In Power	
	Power Consumption	Typ.	585 W	55": 375 W 49": 345 W
		Smart Energy Saving	280 W	55": 140 W 49": 135 W
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC / VCCI	FCC Class "A" / CE / KC / VCCI	
	ErP / Energy Star	No / No	No / No	

* Specifications are subject to change without notice

		75XF3C, 55XF3E	
Panel	Screen Size	75", 55"	
	Panel Technology	IPS, M+ (WRGB)	
	Aspect Ratio	16 : 9	
	Native Resolution	75": 3,840 × 2,160 (UHD) 55": 1,920 × 1,080 (FHD)	
	Brightness	3,000 cd/m ² (Typ.), 2,400 cd/m ² (Min.)	
	Viewing Angle (H × V)	178 × 178	
	Surface Treatment	AGLR (Haze 3%), QWP	
	Lifetime (Typ.)	50,000 Hrs	
	Operation Hours	24Hrs	
	Orientation	Landscape & Portrait	
	Connectivity	Input	HDMI (2), DP, DVI-D, Audio, USB, SD Card (75" Only)
Output		DP, External Speaker	
External Control		RS232C In/out, RJ45 (LAN) In, IR In	
Physical Specification	Bezel Color	Black	
	Bezel Width	75": 11.8 mm (Even) 55": 12 mm (T/B), 9.9 mm (L/R)	
	Monitor Dimension (W × H × D)	75": 1,675.2 × 953.6 × 123.9 mm 55": 1,235.5 × 709.4 × 106.8 mm	
	Weight (Head)	75": 36.7 kg, 55": 26.5 kg	
	VESA™ Standard Mount Interface	75": N/A 55": 600 × 400 mm	
Environment Conditions	Operation Temperature	0°C to 50°C (W/o Direct Sunlight, Direct Sunlight in Cooling System) 0°C to 40°C (Direct Sunlight)	
	Operation Humidity	75": 10% to 85% 55": 10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	
	Power Type	Built-In Power	
	Power Consumption	Typ.	75": 660 W, 55": 280 W
		Smart Energy Saving	75": 320 W, 55": 160 W
Standard (Certification)	Safety	UL Recognized/CB	
	EMC	75": FCC Class "A" / CE / KC 55": FCC Class "A" / CE / KC	
	ErP / Energy Star	No / No	

* Specifications are subject to change without notice

86XE3FS

Panel	Screen Size	86"	
	Panel Technology	IPS	
	Aspect Ratio	16 : 9	
	Native Resolution	3,840 × 2,160 (UHD)	
	Brightness	3,000 cd/m ² (Typ.), 2,800 cd/m ² (Min.)	
	Viewing Angle (H × V)	178 × 178	
	Surface Treatment	AGLR (3%), QWP	
	Lifetime (Typ.)	50,000 Hrs	
	Operation Hours	24Hrs	
	Orientation	Portrait	
	Connectivity	Input	HDMI, DP, DVI-D, Audio, USB
Output		External Speaker	
External Control		RS232C In/out, RJ45 In, RJ45 Out (4)	
Physical Specification	Bezel Color	Black	
	Bezel Width	101 mm (T/B), 135 mm (L/R)	
	Monitor Dimension (W × H × D)	1,338 × 2,100 × 187 mm	
	Weight (Head)	276 kg	
	VESA™ Standard Mount Interface	N/A	
Environment Conditions	Operation Temperature	-30 °C to 50 °C	
	Operation Humidity	5 % to 100%	
Power	Power Supply	100-240V~, 50/60Hz	
	Power Type	Built-In Power	
	Power Consumption	Typ.	1,450 W
Smart Energy Saving		650W	
Standard (Certification)	Safety	UL / cUL / CB	
	EMC	FCC Class "A" / CE / KC	
	ErP / Energy Star	TBD	
	Dust / Water Proofing	IP56	

* Specifications are subject to change without notice

55/49XE4F

Panel	Screen Size	55", 49"	
	Panel Technology	IPS, M+ (WRGB)	
	Aspect Ratio	16 : 9	
	Native Resolution	1,920 × 1,080 (FHD)	
	Brightness	4,000 cd/m ² (Typ.), 3,200 cd/m ² (Min.)	
	Viewing Angle (H × V)	178 × 178	
	Surface Treatment	Haze 3%	
	Lifetime (Typ.)	50,000 Hrs	
	Operation Hours	24Hrs	
	Orientation	Landscape & Portrait	
	Connectivity	Input	HDMI (2), DP, USB (2)
Output		External Speaker	
External Control		RS232C In/out, RJ45 In, HDbaseT, RJ45 Out, IR In	
Physical Specification	Bezel Color	Black	
	Bezel Width	38.4 mm (T/B), 26.0 mm (L/R)	
	Monitor Dimension (W × H × D)	55": 737.4 × 1,292.5 × 88.0 mm 49": 656.2 × 1,153 × 88.0 mm	
	Weight (Head)	50": 40kg 49": 32kg	
	VESA™ Standard Mount Interface	No (Non-standard)	
Environment Conditions	Operation Temperature	-30°C to 50 °C	
	Operation Humidity	5 % to 100 %	
Power	Power Supply	100-240V~, 50/60Hz	
	Power Type	Built-In Power	
	Power Consumption	Typ.	55": 330 W 49": 290 W
Smart Energy Saving		55": 200 W 49": 170 W	
Standard (Certification)	Safety	UL / cUL / CB	
	EMC	FCC Class "A" / CE / KC	
	ErP / Energy Star	Yes / N/A	
	Dust / Water Proofing	IP56	



VIDEO WALL

Artistic Immersion, Overwhelming Captivation

Seamlessly assembled on a large video wall screen, the impressive immersion generated by LG's extremely narrow bezel provides an extraordinary viewing experience.



**Groundbreaking
0.44mm Even Bezel**

LG introduced a groundbreaking bezel under 1 mm wide, which is almost as fine as the line drawn by a 0.4 mm ballpoint pen. The 0.44 mm even bezel - verified by Nemko* - provides a perfect and authentic seamless view, presenting vivid color expression with zero-distortion and superior image quality.



* The 0.44mm even panel bezel and 0.88mm BtB size (borderless type, no metal bezel) have been verified by Nemko, a global institution that tests and certifies electrical equipment.



A World-Class Bezel


The borderless design, with even bezels*, enables immersive and seamless viewing experiences on assembled video wall screens.



* SVH7F: 0.44mm even bezel, VH7E/VM5E: 0.9mm even bezel

Uniform Brightness

LG's LED backlight technology guarantees high brightness uniformity to ensure a clear picture. It generates high visibility and a consistent brightness across the whole screen.

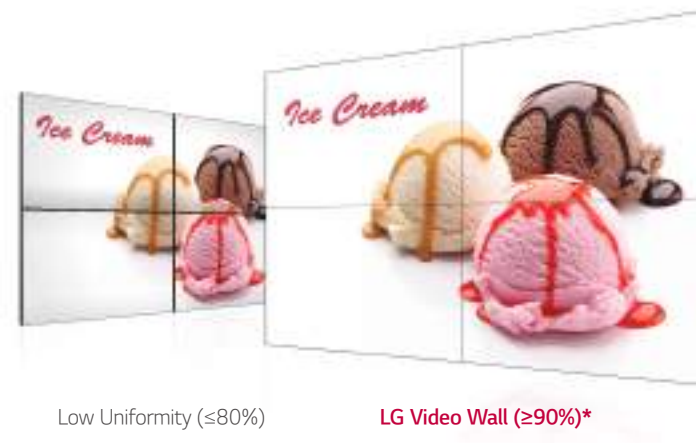

* 55SVH7F: 91% (13 points) /Other LG video wall series: 90% (9 points)
Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment.

Higher Viewing Angle

Large screens are usually positioned higher than human-eye level, making uniform picture quality essential for video walls. The viewing angle* of the LG Video Wall series is high enough to display vivid colors throughout the screen with no distortion.



* 55SVH7F: 60° /Other LG video walls: 45°
Results based on in-house testing. Actual test results may differ depending on environment and measuring equipment

Simple Adjustment for Picture Quality

LG's webOS based Video Wall boasts convenient functions* for maintaining consistent picture quality. The color temperature of the display can be easily adjusted in increments of 100K. In addition, you can modify each grey scale value to achieve more detailed and precise white balance adjustment. These are also surprisingly simple to manage using the remote control.



* Support may differ by model series

Image Gap Reduction


LG Video Wall includes an image improvement algorithm that can reduce image gaps among tiled displays when playing back videos. Objects located on the bezel boundaries are adjusted for a seamless viewing experience.



* Support may differ by model series

LAN Daisy Chain Performance

A LAN daisy chain* allows you to execute commands to control and monitor Video Walls and even update their firmwares at once.

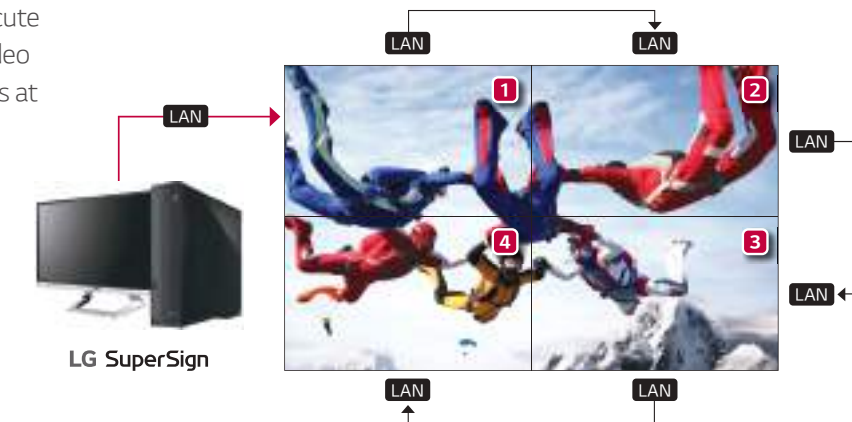

*Support may differ by model series



webOS
0.44mm Even Bezel Video Wall
55SVH7E-A

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 700 cd/m²
- Bezel: 0.44 mm (Even bezel)
- * Bezel to bezel 0.88 mm / NEMKO certified

webOS
0.44mm Even Bezel Video Wall
55SVM5F

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 500 cd/m²
- Bezel: 0.44 mm (Even bezel)
- * Bezel to bezel 0.88 mm / NEMKO certified
- Smart calibration supported



webOS
0.9mm Even Bezel Video Wall
55VM5B/E, 49VH7C/E, 49VM5C/E

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 700 cd/m² (VH7C/E),
500 cd/m² (VM5B/C/E)
- Bezel: 0.9 mm (Even bezel)
- * Bezel to bezel 1.8 mm / NEMKO certified

* Models may vary by region. Check with local sales for availability.



webOS
High Haze Video Wall
55VH7B/E

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 700 cd/m²
- Bezel: 0.9 mm (Even bezel)
- * Bezel to bezel 1.8 mm / NEMKO certified
- Haze 44%

3.5mm Video Wall
55LV77D/75D

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 700 cd/m² (LV77D),
500 cd/m² (LV75D)
- Bezel to bezel 3.5 mm
- * Bezel: 2.25 mm (T/L), 1.25 mm (B/R)



3.5mm Video Wall
49VL5B/F, 49VL5D (webOS), 49VL7D/F

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 700 cd/m² (VL7D/F),
450 cd/m² (VL5B/D/F)
- Bezel to bezel 3.5 mm
- * Bezel: 2.3 mm (T/L), 1.2 mm (B/R)

* Specifications are subject to change without notice

		55SVH7E	55SVM5F
Panel	Screen Size	55"	55"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 × 1,080 (FHD)	1,920 × 1,080 (FHD)
	Brightness (Typ.)	700 cd/m ²	500 cd/m ²
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	Haze 3%	Haze 28%
	Lifetime (Typ.)	60,000 Hrs	60,000 Hrs
	Operation Hours	24 Hrs	24 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	RGB, HDMI (2), DP, DVI-D, Audio, USB	HDMI (2), DP, DVI-D, Audio, USB 2.0
	Output	DP, Audio	DP, Audio
	External Control	RS232C In/out, RJ45(LAN) In/out, IR In	RS232C In/out, RJ45(LAN) In/out, IR In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	0.44 mm (Even), BtoB ¹⁾ 0.88 mm	0.44 mm (Even)
	Monitor Dimension (W × H × D)	1,210.51 × 681.22 × 86.5 mm	1,210.51 × 681.22 × 86.5 mm
	Weight (Head)	16.8 kg	16.8 kg
	VESA™ Standard Mount Interface	600 × 400 mm	600 × 400 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ.	170 W
Smart Energy Saving		110 W	105W
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)	NA / Yes (Energy Star 8.0)
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	Yes	Yes

1) BtoB: Panel bezel to bezel

* Specifications are subject to change without notice

		55VM5B/E, 49VM5C/E	55VH7B-H, 55VH7E
Panel	Screen Size	55", 49"	55"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 × 1,080 (FHD)	1,920 × 1,080 (FHD)
	Brightness (Typ.)	500 cd/m ²	700 cd/m ²
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	Haze 3%	Haze 44%
	Lifetime (Typ.)	60,000 Hrs	60,000 Hrs
	Operation Hours	24Hrs	24Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	49/55VM5E: HDMI (2), DP, DVI-D, Audio, USB, 49VM5C/55VM5B: HDMI, DP, DVI-D, OPS, Audio, RGB, USB 3.0, USB 2.0	55VH7E: HDMI (2), DP, DVI-D, Audio, USB 55VH7B: HDMI (1), DP, DVI-D, OPS, Audio, USB RGB, USB 3.0, USB 2.0
	Output	DP, Audio	DP, Audio
	External Control	RS232C In/out, RJ45(LAN) In/out, IR	RS232C In/out, RJ45(LAN) In/out, IR In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	0.9 mm (Even), BtoB ¹⁾ 1.8 mm	0.9 mm (Even), BtoB 1.8 mm
	Monitor Dimension (W × H × D)	55": 1,211.4 × 682.2 × 86.5 mm / 49": 1,075.7 × 605.8 × 86.2 mm	1,211.4 × 682.2 × 86.5 mm
	Weight (Head)	55": 18.6 kg / 49": 17.5 kg	18.6 kg
	VESA™ Standard Mount Interface	600 × 400 mm	600 × 400 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ.	55": 150 W / 49": 120 W
Smart Energy Saving		55": 80 W / 49": 70 W	110 W
Standard (Certification)	Safety	55/49VM5E: IEC 60950-1 / EN 60950-1 / UL 60950-1 55VM5B/49VM5C: UL/cUL/CB/TUV/KC	55VH7E: IEC 60950-1 / EN 60950-1 / UL 60950-1 55VH7B-H: UL/cUL/CB/TUV/KC
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	55/49VM5E / 49VM5C (Energy Star 7.0) 55VM5B (Energy Star 6.0)	N/A / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	Yes	Yes

* Specifications are subject to change without notice

		55LV77D/75D	49VH7C/E	
Panel	Screen Size	55"	49"	
	Panel Technology	IPS	IPS	
	Aspect Ratio	16 : 9	16 : 9	
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness (Typ.)	LV77D: 700 cd/m², LV75D: 500 cd/m²	700 cd/m² (VH7C/E)	
	Viewing Angle (H x V)	178 x 178	178 x 178	
	Surface Treatment	LV77D: Hard Coating (3H), Anti-reflection Treatment of the Front Polarizer (Reflectance < 2%) LV75D: Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 10%)	Haze 3%	
	Lifetime (Typ.)	60,000 Hrs	60,000 Hrs	
	Operation Hours	24Hrs	24Hrs	
	Orientation	Landscape & Portrait	Landscape & Portrait	
Connectivity	Input	HDMI, DP, DVI-D, RGB, Audio, USB	HDMI (2), DP, DVI-D, Audio, USB (49VH7E) HDMI (1), DP, DVI-D, RGB, Audio, USB (49VH7C)	
	Output	DP, Audio	DP, Audio	
	External Control	RS232C In/out, RJ45(LAN) In, IR In	RS232C In/out, RJ45(LAN) In/out, IR In	
Physical Specification	Bezel Color	Black	Black	
	Bezel Width	2.25 mm (T/L) / 1.25 mm (B/R), BtoB 3.5 mm	0.9 mm (Even), BtoB 1.8 mm	
	Monitor Dimension (W x H x D)	1,213.4 x 684.2 x 88.5 mm	1,075.6 x 605.8 x 86.2 mm	
	Weight (Head)	23.2 kg	17.5 kg	
	VESA™ Standard Mount Interface	600 x 400 mm	600 x 400 mm	
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	
	Operation Humidity	10% to 80%	10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Type	Built-In Power	Built-In Power	
	Power Consumption	Typ.	LV77D: 230 W, LV75D: 160 W	150 W
		Smart Energy Saving	130 W	80 W
Standard (Certification)	Safety	UL / cUL / CB / TUV / KC	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	
	ErP / Energy Star	LV77D: N/A / No, LV75D, Yes (Energy Star 7.0)	N/A / Yes (Energy Star 7.0)	
Media Player Compatibility	OPS Type Compatible	No	Yes	
	External Media Player Attachable	Yes	Yes	

1) BtoB: Panel bezel to bezel

* Specifications are subject to change without notice

		49VL7D/F	49VL5D	49VL5B/F	
Panel	Screen Size	49"	49"	49"	
	Panel Technology	IPS	IPS	IPS	
	Aspect Ratio	16 : 9	16 : 9	16 : 9	
	Native Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	
	Brightness (Typ.)	700 cd/m²	450 cd/m²	450 cd/m²	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	
	Surface Treatment	Haze 3%	Hard Coating (3H), Anti-glare Treatment of the Front Polarizer (Haze 10%)	VL5B: Haze 10% VL5F: Haze 3%	
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs	50,000 Hrs	
	Operation Hours	24Hrs	24Hrs	24Hrs	
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	
Connectivity	Input	VL7D: HDMI, DVI-D, RGB, USB VL7F: HDMI, DP, DVI-D, RGB, Audio, USB	HDMI, DP, DVI-D, RGB, Audio, USB	VL5B: HDMI, DVI-D, RGB, USB VL5F: HDMI, DP, DVI-D, RGB, Audio, USB	
	Output	DVI-D (VL7D) DP, Audio (VL7F)	DP, Audio	VL5B: DVI-D VL5F: DP, Audio	
	External Control	RS232C In/out, RJ45(LAN) In, IR In	RS232C In/out, RJ45(LAN) In/out, IR In	RS232C In/out, RJ45(LAN) In, IR In	
Physical Specification	Bezel Color	Black	Black	Black	
	Bezel Width	2.3 mm (T/L) / 1.2 mm (B/R) BtoB 3.5 mm	2.3 mm (T/L) / 1.2 mm (B/R) BtoB 3.5 mm	2.3 mm (T/L) / 1.2 mm (B/R) BtoB 3.5 mm	
	Monitor Dimension (W x H x D)	1,077.6 x 607.8 x 89.7 mm	1,077.6 x 607.8 x 89.7 mm	1,077.6 x 607.8 x 89.7 mm	
	Weight (Head)	17.8 kg	17.8 kg	17.8 kg	
	VESA™ Standard Mount Interface	600 x 400 mm	600 x 400 mm	600 x 400 mm	
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C	
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Type	Built-In Power	Built-In Power	Built-In Power	
	Power Consumption	Typ.	130 W (VL7D) 140 W (VL7F)	93 W	90 W
		Smart Energy Saving	50 W 75 W	50 W	49VL5B: 40W 49VL5F: 55 W
Standard (Certification)	Safety	UL / cUL / CB / TUV / KC (VL7D) IEC 60950-1 / EN 60950-1 / UL 60950-1 (VL7F)	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC	
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	
	ErP / Energy Star	N/A / Yes	N/A / Yes	N/A / Yes	
Media Player Compatibility	OPS Type Compatible	No	No	No	
	External Media Player Attachable	Yes	Yes	Yes	



| ULTRA STRETCH

Space Fitting Design for Effective Advertising

The unique bar-type displays are ideal for showing vertical or horizontal objects without truncation or compound content composed of video and text. Placed on pillars or any long structures, they provide an extraordinary viewing experience.

Extended Wide Format with UHD Resolution

This bar-type screen is the most promising display for advertisement and information delivery with clear and vivid colors, placed in anywhere.



Effective Content Delivery

Compound content composed of video and text can be organized flexibly as the user sees fit, something which ordinary displays with a 16:9 ratio fail to achieve due to space limitations. Also, vertical or horizontal objects are seamlessly shown, providing realistic viewing experiences.



Multi Screen Mode with 4PBP

The usability of Ultra Stretch displays is maximized with PBP (Picture-by-Picture) feature. A variety of images and information can be delivered simultaneously in portrait or landscape orientation, making it appear that multiple displays are being used.



Easy Content Editing via SuperSign Media Editor

With the LG SuperSign Media Editor, users can not only create content using various images or a video clip, but also easily edit original content to fit 58:9 or 32:9 unique ratio.



LAN Daisy Chain Management

A LAN daisy chain is supported, allowing you to execute commands to control and monitor the displays and even update their firmware.



* Models may vary by region. Check with local sales for availability.



webOS
32:9 Ultra Stretch
88BH7D/F

- Resolution: 3,840 × 1,080
- Brightness (Typ.): 700 cd/m²
- Bezel: 5.9mm (T/B), 4.4mm (L/R)
- Dimension: (2,158.3 × 611.2 × 84.8) mm
- Tiling and LAN daisy chain



webOS
58:9 Ultra Stretch
86BH5C/F

- Resolution: 3,840 × 600
- Brightness (Typ.): 500 cd/m²
- Bezel: 5.9 mm (T/B), 4.4 mm (L/R)
- Dimension: (2,158.3 × 348.5 × 81.7) mm
- Tiling and LAN daisy chain

* Specifications are subject to change without notice

		88BH7D/F	86BH5C/F
Panel	Screen Size	88"	86"
	Panel Technology	IPS	IPS
	Aspect Ratio	32:9	58:9
	Native Resolution	3,840 × 1,080 (UHD)	3,840 × 600 (UHD)
	Brightness (Typ.)	700 cd/m ²	500 cd/m ² (5C)
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	AGLR (Haze 3%)	AGP (Haze 10%)
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24Hrs	24Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	HDMI (3), DP, OPS, DVI-D, Analog Audio, USB (2), SD Card	HDMI (3), DP, OPS, DVI-D, Analog Audio, USB (2), SD Card
	Output	DP, Analog Audio (Line Out)	DP, Analog Audio (Line Out)
	External Control	RS232C In/out, RJ45 (LAN) In/out, IR & Light Sensor In	RS232C In/out, RJ45 (LAN) In/out, IR & Light Sensor In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	5.9 mm (T/B), 4.4 mm (L/R)	5.9 mm (T/B), 4.4 mm (L/R)
	Monitor Dimension (W × H × D)	2,158.3 × 611.2 × 84.8 mm	2,158.3 × 348.5 × 81.7 mm
	Weight (Head)	34.2 kg	20.5 kg
	VESA™ Standard Mount Interface	600 × 400 mm	600 × 200 mm
Environment Conditions	Operation Temperature	0 °C to 40 °C	0 °C to 40 °C
	Operation Humidity	10 % to 80 %	10 % to 80 %
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ. 400 W	180 W
Standard (Certification)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	Class C* / N/A	N/A / N/A
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	No	No

* N/A for EU ErP



| INTERACTIVE

Smart Collaboration beyond Touch Experience

The LG Interactive Digital Board (IDB) boosts meeting productivity by encouraging participants to freely share their ideas on the screen using intuitive touch and embedded collaboration solutions.

Outstanding Touch Performance

With the advanced built-in touch displays and high-performance SoC, the screen recognizes even the smallest points and instantly shows the response to the touch point. So, various touch-based solutions can be applied for customer interactions.



Smart Collaboration beyond Touch Experience

For effective collaboration, the embedded IDB (Interactive Digital Board) app offers user-friendly writing software and collaboration solutions* which enable each participant to share their laptop screens, write on the shared screens, and save annotations.



* Support may differ by model series

Multi Touch Experience

Capable of recognizing multi point-touches* at once, the screen enables various touch applications to be applied as well as provides users more realistic and interesting touch experiences.



* Touch points can vary depending on the models and connection environment.

Vivid Color Details with Ultra HD

With LG IDB's UHD resolution*, users can view content in the finest detail, even with full zoom-in. UHD provides the highest-quality media experience at four times higher definition than FHD.



FULL HD

ULTRA HD

* Exclusive to the 86TR3E, 75TC3D, 55TC3CD model

Easy Touch Navigator on Display

Providing optimal ease of use, LG IDB users can run desired functions or change settings by softly pressing the screen to call up the Touch Menu*.



* Support may differ by model series
** The menu design (GUI) may differ by model series.

Compatibility with AV Control System

LG touch displays have been certified Crestron Connected® for a higher level of compatibility with professional AV controls to achieve seamless integration and automated control*, boosting business management efficiency.



* Network-based control, except the 55TC3CD mode



webOS
Interactive Digital Board
86TN3F

- Ultra HD: 3,840 × 2,160
- Brightness: 350 cd/m²
- In-cell touch
- Active Pen
- Data Mirroring
- Interactive UX/UI (New Interactive Display App)

ANDROID™
Interactive Digital Board
86/75/65TR3BF

- Ultra HD: 3,840 × 2,160
- Brightness: 280 cd/m² (86/75), 300 cd/m² (65)
- Multi-touch max. 20 points
- Natural Touch Experience
- Airclass
- Multi OS Compatibility



webOS
Interactive Digital Board
75/55TC3D

- Ultra HD : 3,840 × 2,160 (75"), Full HD : 1,920 × 1,080 (55")
- Brightness (Typ., module): 500 cd/m² (75"), 450 cd/m² (55")
- Built-in P-Cap touch
- Multi-touch max. 40 points
- Embedded IDB app
- Built-in speaker

* Models may vary by region. Check with local sales for availability.



webOS
IR Touch Display
55/49/43/32TA3E

- Full HD: 1,920 × 1,080
- Brightness (Typ., module): 450 cd/m², 400 cd/m² (32")
- Built-in IR touch
- Multi-touch max. 10 points
- Embedded IDB app (Writing only)
- Built-in speaker

Touch Overlay
KT-T75/65/55/49/43/32E

- IR touch
- Multi-touch max. 10 points
- Compatible with various LG digital signages
- Supported operating system:
Windows (7, 8, 8.1, 10),
Mac OS X(10.9, 10.10, single touch only),
Android (Kernal version 3.5+),
Linux (Kernal version 3.5+),
Chrome (39 over)



* Specifications are subject to change without notice

		86TN3F	86/75/65TR3BF
Panel	Screen Size	86"	86", 75", 65"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Brightness (Typ.)	350 cd/m ²	86"/75": 280 cd/m ² , 65": 300 cd/m ²
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	Haze 4%	86"/75": Haze 28%, 65": Haze 3%
	Lifetime (Typ.)	30,000 Hrs (min.)	30,000 Hrs
	Operation Hours	16 Hrs	16 Hrs
	Orientation	Landscape	Landscape
	Connectivity	Input	HDMI (2), DP, DVI-D, Audio, USB 2.0 (2)/Type C (USB 2.0) Touch Out (USB 2.0) B-Type (2)
Output		Touch USB (2)	Touch USB (2), Audio Out, HDMI
External Control		RS232C In/out, RJ45 In	RS232C In, RJ45 In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	(T/L/R/B): 28.8mm	(T/R/L): 17.7mm, Bottom: 45.7mm
	Monitor Dimension (W × H × D)	1952.6 X 1164.1 X 86.4	86": 1957×1160×86mm, 75": 1709×1020×86mm, 65": 1488×897×86mm
	Weight (Head)	66.7 kg	86": 67 kg, 75": 53 kg, 65": 40 kg
	VESA™ Standard Mount Interface	600 x 400 mm	86": 800 x 600, 75": 800 x 400, 65": 600 x 400
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ.	≤ 360 W
Smart Energy Saving		30 %	N/A
Audio	Built-in Speaker	Built in(10W/Ch)	Built in 24W (12W + 12W)
Standard (Certification)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	No / No	Yes / No
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	No	No
Touch Specifications	Touch Type	InCell	IR
	Available Object Size for Touch	Ø 5 mm †	Ø 3 mm †
	Accuracy	1.5 mm	±1.5mm
	Interface	USB 2.0	USB 2.0
	Protection Glass Thickness	1.85T (Anti-Glare)	4T (Anti-Glare)
Multi Touch Point ²⁾	Finger : Max 20 Point (Windows) Finger: Max 10Point (webOS) Active Pen : Max 2 Point	Max. 20 Points	

1) Touch points can vary depending on the connection environment.
2) Additional software is required for touch performance.

* Specifications are subject to change without notice

		75/55TC3D	55/49/43/32TA3E
Panel	Screen Size	75", 55"	55", 49", 43", 32"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	75": 3,840 × 2,160 (UHD) 55": 1,920 × 1,080 (FHD)	1,920 × 1,080 (FHD)
	Brightness (Typ.)	75": 500 cd/m ² (Module), 55": 450 cd/m ² (Module)	55",49",43": 450 cd/m ² (Module) 32": 400 cd/m ² (Module)
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	75": Haze 3%, 55": Haze 1%	Haze 1%
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24 Hrs	24 Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
	Connectivity	Input	HDMI (3), DP, DVI-D, RGB, Audio, USB (2), OPS USB
Output		Touch USB (2)	DP, Audio Out
External Control		RS232C In/out, RJ45 In	RS232C In/out, RJ45 (LAN) In, IR Receiver In, Pixel Sensor In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	75": 41.6 mm (Even) 55": 31.6 mm (T), 32.3 mm (L/R), 37.7 mm(B)	32.7 mm (Even)
	Monitor Dimension (W × H × D)	75": 1,760.9 × 1011.1 × 69.7 mm (w/o Handle), 55": 1,276.4 × 751.9 × 63.9 mm	55": 1,278 × 748.8 × 71.4 mm, 49": 1,142.2 × 672.4 × 71.4 mm, 43": 1,009.6 × 597.8 × 71.4 mm, 32": 768.4 × 462.9 × 74.5 mm
	Weight (Head)	75": 74.5 kg, 55": 30.1 kg	55": 28.0 kg, 49": 22.3 kg, 43": 17.1 kg, 32": 10.3 kg
	VESA™ Standard Mount Interface	75": 600 × 400 mm, 55": 300 × 300 mm	55", 49": 300 × 300 mm, 43", 32": 200 × 200 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ.	75" ≤ 240 W, 55" ≤ 100 W
Smart Energy Saving		75" ≤ 170 W, 55" ≤ 70 W	55": 70 W, 49": 60 W, 43": 55 W, 32": 45 W
Standard (Certification)	Safety	UL / cUL / CB / TUV / KC	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	No / No	N/A / N/A
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	No	Yes
Touch Specifications	Touch Type	P-Cap (Ag Metal Mesh)	IR (Scattering)
	Available Object Size for Touch	Ø 6 mm †	Ø 6 mm †
	Accuracy	2 mm	Less than 2 mm
	Interface	USB 2.0	USB 2.0
	Protection Glass Thickness	75": 4T (Anti-Glare), 55": 3.2T (Anti-Glare)	2.8T (Anti-glare)
Multi Touch Point ²⁾	Max. 40 Points	Max 10 Points	

* Specifications are subject to change without notice

		KT-T75E	KT-T65E	KT-T55E
Panel	Screen Size	75"	65"	55"
	Compatible Products	75UH5E, 75UM3E, 75UH5C, 75UM3C	65SM5(K)D, 65SE3(K)D	55SH7(P)E, 55SH7DD/E, 55SM5(K)D/E, 55SL5B/E, 55SL5PE, 55SM3C, 55SE3(K)D/DD/E
	Brightness (Typ.)	N/A (Max 20% Brightness Reduction with Protection Glass)	N/A (Max 20% Brightness Reduction with Protection Glass)	N/A (Max 20% Brightness Reduction with Protection Glass)
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	USB	USB	USB
Physical Specification	Bezel Color	Black	Black	Black
	Bezel Width	32.7 mm	32.7 mm	32.7 mm
	Overlay Dimension (W x H x D)	1,722.1 x 1,000.3 x 29.3 mm	1,496.9 x 871.9 x 29.3 mm	1,278.0 x 748.8 x 29.3 mm
	Weight (Head)	17 kg	12.9 kg	10.2 kg
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%
Power	Power Supply	USB	USB	USB
	Power Consumption	Max. 1.8W	Max. 1.8W	Max. 1.8W
Touch Specifications	Touch Type	IR (Infrared Rays) Scattering	IR (Infrared Rays) Scattering	IR (Infrared Rays) Scattering
	Available Object Size for Touch	Ø6 mm↑ (Single), Ø8 mm↑ (Multi)	Ø6 mm↑ (Single), Ø8 mm↑ (Multi)	Ø6 mm↑ (Single), Ø8 mm↑ (Multi)
	Accuracy	2 mm ↓ (Over 90% Area)	2 mm ↓ (Over 90% Area)	2 mm ↓ (Over 90% Area)
	Interface	USB	USB	USB
	Protection Glass Thickness	3.2T (Anti-Glare)	2.8T (Anti-Glare)	2.8T (Anti-Glare)
	Multi Touch Point ¹⁾	Max 10 Points	Max 10 Points	Max 10 Points

1) Touch points can vary depending on the connection environment.

* Specifications are subject to change without notice

		KT-T49E	KT-T43E	KT-T32E
Panel	Screen Size	49"	43"	32"
	Compatible Products	49SH7(P)E, 49SH7DD/E, 49SM5(K)D/E, 49SL5B/E, 49SL5PE, 49SM3C, 49SE3(K)D/DD/E	43SH7(P)E, 43SH7DD/E, 43SM5(K)D/E, 43SL5B/E, 43SL5PE, 43SM3C, 43SE3(K)D/DD/E	32SM5(K)D/E, 32SE3(K)D/E
	Brightness (Typ.)	N/A (Max 20% Brightness Reduction with Protection Glass)	N/A (Max 20% Brightness Reduction with Protection Glass)	N/A (Max 20% Brightness Reduction with Protection Glass)
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait
Connectivity	Input	USB	USB	USB
Physical Specification	Bezel Color	Black	Black	Black
	Bezel Width	32.7 mm	32.7 mm	32.7 mm
	Overlay Dimension (W x H x D)	1,142.2 x 672.4 x 29.3 mm	1,009.6 x 597.8 x 29.3 mm	768.4 x 462.9 x 29.3 mm
	Weight (Head)	7.8 kg	6.4 kg	4.2 kg
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%
Power	Power Supply	USB	USB	USB
	Power Consumption	Max. 1.8W	Max. 1.8W	Max. 1.8W
Touch Specifications	Touch Type	IR (Infrared Rays) Scattering	IR (Infrared Rays) Scattering	IR (Infrared Rays) Scattering
	Available Object Size for Touch	Ø6 mm↑ (Single), Ø8 mm↑ (Multi)	Ø6 mm↑ (Single), Ø8 mm↑ (Multi)	Ø6 mm↑ (Single), Ø8 mm↑ (Multi)
	Accuracy	2 mm ↓ (Over 90% Area)	2 mm ↓ (Over 90% Area)	2 mm ↓ (Over 90% Area)
	Interface	USB	USB	USB
	Protection Glass Thickness	2.8T (Anti-Glare)	2.8T (Anti-Glare)	2.8T (Anti-Glare)
	Multi Touch Point ¹⁾	Max 10 Points	Max 10 Points	Max 10 Points




| ULTRA HD STAND-ALONE

Absolute Color Vividness on Ultra HD Display

Vibrant colors and powerful performance bring content to life, effectively capturing the attention of passerby, driving traffic to the display's location.

Vivid Color Details with Ultra HD

The UHD resolution delivers more detailed and vivid content without distortion, with four times higher definition than FHD. LG UHD displays ensure stable UHD video playback by supporting HEVC (High Efficiency Video Coding). Moreover, LG IPS panel features a wide range of angle to display clear content regardless of the position of viewers.

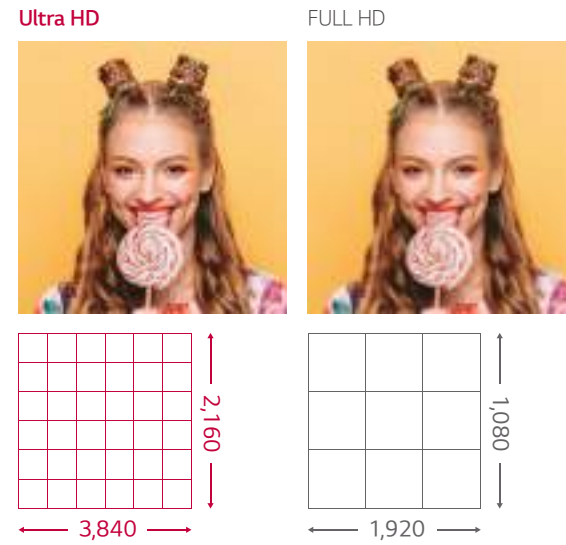

Multi Screen Mode

PBP (Picture-By-Picture) features multi screen in a single display with upto 4 input sources while PIP (Picture-In-Picture) supports playing both main screen and sub screen at the same time with various layouts. This gives great flexibility to allocate space for each content source.



Compatibility with AV Control System

LG UHD displays have been certified Crestron Connected® for a higher level of compatibility with professional AV controls to achieve seamless integration and automated control*, boosting business management efficiency.



* Network-based control

Compatibility with Video Conference System

For the optimum visual meeting, LG UHD displays have certified its compatibility with Cisco Spark Room Kits, a system that offers powerful and integrated control* for a smarter video conference, eliminating a waste of time to set up the picture quality or to change input on incoming calls.



* Using an HDMI cable connection

Detachable Logo & Built-in Speaker

The detachable logo allows for installation in the desired orientation in landscape or portrait mode, making it easy for the user to arrange the signage. Also, sounds can be played from built-in speakers*, giving advertisements greater impact.



* Exclusive to the 86/75UH5E, 86/75UM3E models

Slim and Tidy in Appearance

Despite being a large-sized display, the LG UHD display still boasts a slim depth, a feature that makes installation easier by requiring less space. This display achieves an immersive view while maintaining a sleek look.



* Depth is based on the 75" model



webOS
Ultra HD
65/55/49UH7F

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 700 cd/m²
- Haze 3%
- Bezel: 9.9mm(T/R/L), 14.4mm(B)
- Multiple screen with 4PBP / PIP

webOS
Ultra HD
98UH5E/F, 86/75UH5E

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 500 cd/m²
- Bezel: 14.9 mm (Even) (98"/75"),
14.3 mm (Even) (86")
- Multiple screen with 4PBP* / PIP**



webOS
Ultra HD
65/55/49UH5E/F, 43UH5F

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 500 cd/m²
- Haze 28%
- Bezel: 12.1 mm (T), 12.6 mm (R/L), 15.7 mm (B) (65"/55")
11.9 mm (T), 12.4 mm (R/L), 15.5 mm (B) (49")
- Multiple screen with 4PBP / PIP

* PBP: Picture by Picture
** PIP: Picture in Picture

* Models may vary by region. Check with local sales for availability.



webOS
Ultra HD
98UM3E/F, 86/75UM3E

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 350 cd/m²
- Bezel: 14.3 mm (Even) (86"), 14.9 mm (Even) (75", 98")
- Multiple screen with 4PBP / PIP

webOS
Ultra HD
65/55/49/43UM3DF

- Ultra HD: 3,840 × 2,160
- Brightness (Typ.): 350 cd/m²
- Bezel: 9.9mm(T/R/L), 14.4mm(B) (65"/55"/49")
8.4mm(T/R/L), 14.4mm(B) (43")
- Multiple screen with 2PBP / PIP



* Specifications are subject to change without notice

		65/55/49UH7F	98UH5E/F, 86/75UH5E	65/55/49UH5E	
Panel	Screen Size	65", 55", 49"	98", 86", 75"	65", 55", 49"	
	Panel Technology	IPS	IPS	IPS	
	Aspect Ratio	16 : 9	16 : 9	16 : 9	
	Native Resolution	3,840 x 2,160 (UHD, RGB)	3,840 x 2,160 (UHD)	3840 x 2160 (UHD, RGB)	
	Brightness (Typ.)	700 cd/m ²	500 cd/m ²	500 cd/m ²	
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178	
	Surface Treatment	Haze 3%	98": Haze 1%, 86", 75": Haze 3%	Haze 28%	
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs	50,000 Hrs	
	Operation Hours	24Hrs	24Hrs	24Hrs	
	Orientation	Landscape & Portrait	Landscape & Portrait	Landscape & Portrait	
	Connectivity	Input	HDMI (3) (HDCP2.2), DP (HDCP2.2), DVI-D, Audio, USB (USB2.0)	HDMI (3), DP, DVI-D, Audio, USB (2)	HDMI (3), DP, DVI-D, Audio, USB (2)
		Output	DP, Audio (Off/Fixed/Variable)	DP, Audio (Off/Fixed/Variable), External Speaker (98" Only)	DP, Audio (Off/Fixed/Variable), External Speaker
		External Control	RS232C In, RJ45 (LAN), IR In	RS232C In/out, RJ45 (LAN) In, IR In	RS232C In/out, RJ45 (LAN) In, IR In
Physical Specification	Bezel Color	Black	Black	Black	
	Bezel Width	9.9mm(T/R/L), 14.4mm(B)	98", 75": 14.9 mm (Even), 86": 14.3 mm (Even)	65"/55"/49": 9.9mm(T/R/L), 14.4mm(B)	
	Monitor Dimension (W x H x D)	65": 1453.3mm x 844.0mm x 39.9mm, 55": 1234.4mm x 720.9mm x 39.9mm, 49": 1098.6mm x 644.5mm x 39.9mm	98": 2,191.8 x 1,246.8 x 69.4 mm (w/o Handle with LG Logo), 86": 1,926.2 x 1,097.2 x 60.6 mm (w/o Handle), 75": 1,682.4 x 960.3 x 57.9 mm (w/o Handle LG Logo)	65": 1453.3mm x 844.0mm x 39.9mm 55": 1234.4mm x 720.9mm x 39.9mm 49": 1098.6mm x 644.5mm x 39.9mm	
	Weight (Head)	65": 28.2kg, 55": 18.9kg, 49": 15.4kg	98": 88 kg, 86": 49 kg, 75": 41.5 kg	65": 28.2kg, 55": 18.9kg, 49": 15.4kg	
	VESA™ Standard Mount Interface	300 x 300 mm	98": 800 x 400 mm, 86", 75": 600 x 400 mm	65"/55"/49": 300 x 300 mm	
	Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C	0°C to 40°C
Operation Humidity		10% to 80%	10% to 80%	10% to 80%	
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz	
	Power Type	Built-In Power	Built-In Power	Built-In Power	
	Power Consumption	Typ.	65": 130 W, 55": 110 W, 49": 100 W	98": 420 W, 86": 215 W, 75": 180 W	65": 120W(TBD), 55": 105W(TBD), 49": 95W(TBD)
Smart Energy Saving		65": 100 W, 55": 85 W, 49": 75 W	98": 294 W, 86": 151 W, 75": 126 W	65": 90W(TBD), 55": 80W(TBD), 49": 70W(TBD)	
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	
	ErP / Energy Star	ErP/EPA7.0	98", 86": N/A / N/A 75": N/A / Yes (Energy Star 7.0)	ErP/EPA7.0	
Media Player Compatibility	OPS Type Compatible	Yes	98": No 86", 75": Yes	Yes	
	External Media Player Attachable	Yes	Yes	Yes	

* Specifications are subject to change without notice

		65/55/49/43UH5F	86/75UM3E	65/55/49/43UM3DF
Panel	Screen Size	65", 55", 49", 43"	86", 75"	65", 55", 49", 43"
	Panel Technology	IPS	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9	16 : 9
	Native Resolution	3840 x 2160 (UHD, RGB)	3,840 x 2,160 (UHD)	3840 x 2160 (UHD, RGB)
	Brightness (Typ.)	500 cd/m ²	350 cd/m ²	350 cd/m ²
	Viewing Angle (H x V)	178 x 178	178 x 178	178 x 178
	Surface Treatment	Haze 3%	Haze 3%	Haze 3%
	Lifetime (Typ.)	50,000 Hrs	86": 30,000 Hrs, 75": 50,000 Hrs	86": 30,000 Hrs, 75": 50,000 Hrs
	Operation Hours	24Hrs	86": 16Hrs, 75": 24Hrs	86": 16Hrs, 75": 24Hrs
	Orientation	Landscape & Portrait	86": Landscape, 75": Landscape & Portrait	50,000 Hrs
	Connectivity	Input	HDMI (3), DP, DVI-D, Audio, USB (2)	HDMI (3), DP, DVI-D, Audio, USB (2)
Output		DP, Audio (Off/Fixed/Variable), External Speaker	DP, Audio (Off/Fixed/Variable)	DP, Audio (Off/Fixed/Variable)
External Control		RS232C In/out, RJ45 (LAN) In, IR In	RS232C In/out, RJ45 (LAN) In, IR In	RS232C out (4 pin phone-jack)
Physical Specification	Bezel Color	Black	Black	Black
	Bezel Width	65"/55"/49": 9.9mm(T/R/L), 14.4mm(B) 43": 8.4mm(T/R/L), 14.4mm(B)	86": 14.3 mm (Even), 75": 14.9mm (Even)	86": 14.3 mm (Even), 75": 14.9mm (Even)
	Monitor Dimension (W x H x D)	65": 1453.3mm x 844.0mm x 39.9mm 55": 1234.4mm x 720.9mm x 39.9mm 49": 1098.6mm x 644.5mm x 39.9mm 43": 962.5mm x 568.0mm x 39.9mm	86": 1,926.2 x 1097.2 x 60.6 mm (w/o Handle) 75": 1,682.4 x 960.3 x 57.9 mm (w/o Handle and Logo)	65"/55"/49": 9.9mm(T/R/L), 14.4mm(B), 43": 8.4mm(T/R/L), 14.4mm(B)
	Weight (Head)	65": 28.2kg, 55": 18.9kg, 49": 15.4kg, 43": 11.2kg	86": 49 kg, 75": 41.5 kg	65": 28.2kg, 55": 18.9kg, 49": 15.4kg, 43": 11.2kg
	VESA™ Standard Mount Interface	65"/55"/49": 300 x 300 mm 43": 200 x 200 mm	600 x 400 mm	65"/55"/49": 300 x 300 mm 43": 200 x 200 mm
	Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
Operation Humidity		10% to 80%	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power	Built-In Power
	Power Consumption	Typ.	65": 120W(TBD), 55": 105W(TBD), 49": 95W(TBD), 43": 75W	86": 250 W, 75": 160 W
Smart Energy Saving		65": 90W(TBD), 55": 80W(TBD), 49": 70W(TBD), 43": 55W	86": 175 W, 75": 112 W	65": 85W(TBD), 55": 70W, 49": 65W, 43": 50W
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	ErP/EPA7.0	86": N/A / N/A, 75": N/A / Energy Star 7.0	ErP/EPA7.0
Media Player Compatibility	OPS Type Compatible	Yes	Yes	Yes
	External Media Player Attachable	Yes	Yes	Yes



| FULL HD STAND-ALONE

A Broad Range of Offers for Diverse Customer Values

Optimized for a variety of markets, LG's versatile standard displays provide value-added functions to effectively deliver advertisements and information to viewers.

Wide Viewing Angle

LG IPS panel technology provides better control of the liquid crystals, which in turn allows the screen to be viewed at virtually any angle. So it delivers stable and accurate colors no matter where viewers are.



Clear View with Non-glare Coating

Viewers can easily become frustrated by unnecessary reflections when watching a screen under brightly lit conditions. LG's high haze displays have resolved this problem by increasing the haze value up to 28%*, enhancing content visibility and text readability.



* Exclusive to the SH7PE-H, SL5(P)E-H series

Multi Screen Mode

PBP (Picture-By-Picture) and PIP (Picture-In-Picture) feature* gives a chance to compose up to 2 divided split screen on landscape or portrait display format. This gives great flexibility to users to allocate space for each content source.



PBP



PIP

* For webOS signage models

Conformal Coating

The product can be often unavoidably exposed to dust and water during maintenance. Conformal coating on power board eliminates such circumstances by protecting it against dust, iron powder, humidity, etc.



Compatibility with AV Control Systems

LG Digital Signage has been certified* Crestron Connected® for a higher level of compatibility with professional AV controls to achieve seamless integration and automated control**, boosting business management efficiency.



* Except 23SE3TE, 22SM3B, SL5B series
** Network based control

Detachable Logo & Built-in Speaker

The detachable logo* makes it easy for the user to arrange the signage. Also, sounds can be played from built-in speakers**, offering viewers various multi-media experiences.



*Except the 23SE3TE, 22SM3B models
** Exclusive to the SH7(P)E, SH7DD, SM5KE, SL5(P)E, SE3KE, 22SM3B series



webOS
450 nit Standard
55/49/43/32SM5KE

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 450 cd/m², 400 cd/m² (32")
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
13 mm (T/L/R), 18mm (B) (32")
- Double screen with 2PBP / PIP
- Built-in speaker

webOS*
OPS Power Built-in
55/49/43SH7E/SH7PE-H

- Full HD: 1,920 × 1,080
- Brightness: 700 cd/m² (-B)
- Haze: 3% (SH7E), 28% (SH7PE)
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
- Built-in speaker

* Applicable to SH7E only



High Haze
55/49/43SL5(P)E-H

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 427 cd/m²
- Haze: 28%
- Bezel: 11.9 mm (T/L/R), 18 mm (B)
- Built-in OPS power (SL5PE-H series only)
- Built-in speaker



* Picture-By-Picture
** Picture-In-Picture

* Models may vary by region. Check with local sales for availability.

350 nit Standard
55/49/43/32SE3KE

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 350 cd/m²
- Bezel: 11.9 mm (T/L/R), 18 mm (B),
13.0 mm (T/L/R), 18 mm (B) (32")
- Built-in speaker



webOS
250 nit Standard
22SM3B

- Full HD: 1,920 × 1,080
- Brightness (Typ.): 250 cd/m²
- Bezel: 16.3 mm (Even)
- Built-in speaker

* Specifications are subject to change without notice

		SH7E	SH7PE-H
Panel	Screen Size	55", 49", 43"	55", 49", 43"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 × 1,080 (FHD)	1,920 × 1,080 (FHD)
	Brightness (Typ.)	700 cd/m ²	700 cd/m ²
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	Haze 3%	Haze 28%
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24Hrs	24Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
	Connectivity	Input	HDMI (2), DVI-D, Audio, RGB, USB
Output		Audio (Off/Fixed/Variable)	Audio (Off/Fixed/Variable)
External Control		RS232C In/out, RJ45 (LAN) In, IR In	RS232C In/out, RJ45 (LAN) In, IR In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	11.9 mm (T/L/R), 18 mm (B)	11.9 mm (T/L/R), 18 mm (B)
	Monitor Dimension (W × H × D)	55": 1,238 × 714.9 × 54 mm, 49": 1,102.2 × 638.5 × 54 mm, 43": 969.6 × 563.9 × 54 mm	55": 1238mm x 714.9mm x 54mm, 49": 1102.2mm x 638.5mm x 54mm, 43": 969.6mm x 563.9mm x 54mm
	Weight (Head)	55": 17.5 kg 49": 14.3 kg 43": 10.5 kg	55": 17.5 kg 49": 14.3 kg 43": 10.5 kg
	VESA™ Standard Mount Interface	55", 49": 300 × 300 mm 43": 200 × 200 mm	55", 49": 300 × 300 mm 43": 200 × 200 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ.	55": 100 W, 49": 90 W, 43": 75 W
Smart Energy Saving		55": 70 W, 49": 63 W, 43": 52.5 W	55": 70 W, 49": 63 W, 43": 52.5 W
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "B" / CE / KC	FCC Class "B" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)	N/A / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	Yes	Yes

* Specifications are subject to change without notice

		SM5KE	SL5(P)E-H
Panel	Screen Size	55", 49", 43", 32"	55", 49", 43"
	Panel Technology	IPS	IPS
	Aspect Ratio	16 : 9	16 : 9
	Native Resolution	1,920 × 1,080 (FHD)	1,920 × 1,080 (FHD)
	Brightness (Typ.)	450 cd/m ² , 400 cd/m ² (32")	450 cd/m ²
	Viewing Angle (H × V)	178 × 178	178 × 178
	Surface Treatment	AGP Haze 1%	Haze 28%
	Lifetime (Typ.)	50,000 Hrs	50,000 Hrs
	Operation Hours	24Hrs	24Hrs
	Orientation	Landscape & Portrait	Landscape & Portrait
	Connectivity	Input	HDMI (3), DP, DVI-D, Audio, USB
Output		DP, Audio (Off/Fixed/Variable)	Audio (Off/Fixed/Variable)
External Control		RS232C In/out, RJ45 (LAN) In, IR In	RS232C In/out, RJ45 (LAN) In, IR In
Physical Specification	Bezel Color	Black	Black
	Bezel Width	11.9 mm (T/L/R), 18 mm (B) 32": 13 mm (T/L/R), 18 mm (B)	11.9 mm (T/L/R), 18 mm (B)
	Monitor Dimension (W × H × D)	55": 1,238 × 714.9 × 54 mm, 49": 1,102.2 × 638.5 × 54 mm, 43": 969.6 × 563.9 × 54 mm, 32": 729.4 × 428.9 × 55.5 mm	55": 1,238 × 714.9 × 54 mm, 49": 1,102.2 × 638.5 × 54 mm, 43": 969.6 × 563.9 × 54 mm
	Weight (Head)	55": 17.5 kg, 49": 14.3 kg, 43": 10.0 kg, 32": 5.4 kg	55": 17.5 kg, 49": 14.3 kg, 43": 10.0 kg
	VESA™ Standard Mount Interface	55", 49": 300 × 300 mm 43", 32": 200 × 200 mm	55", 49": 300 × 300 mm 43": 200 × 200 mm
Environment Conditions	Operation Temperature	0°C to 40°C	0°C to 40°C
	Operation Humidity	10% to 80%	10% to 80%
Power	Power Supply	100-240V~, 50/60Hz	100-240V~, 50/60Hz
	Power Type	Built-In Power	Built-In Power
	Power Consumption	Typ.	55": 100 W, 49": 85 W, 43": 75 W, 32": 60 W
Smart Energy Saving		55": 70 W, 49": 59.5 W, 43": 52.5 W, 32": 42 W	55": 63 W, 49": 56 W, 43": 49 W
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	IEC 60950-1 / EN 60950-1 / UL 60950-1
	EMC	FCC Class "A" / CE / KC	FCC Class "B" / CE / KC
	ErP / Energy Star	N/A / Yes (Energy Star 7.0)	Yes ¹⁾ / Yes (Energy Star 7.0)
Media Player Compatibility	OPS Type Compatible	Yes	Yes
	External Media Player Attachable	Yes	Yes

* Specifications are subject to change without notice

SE3KE

Panel	Screen Size	55", 49", 43", 32"	
	Panel Technology	IPS	
	Aspect Ratio	16 : 9	
	Native Resolution	1,920 x 1,080 (FHD)	
	Brightness (Typ.)	350 cd/m ²	
	Viewing Angle (H x V)	178 x 178	
	Surface Treatment	AGP Haze 1%	
	Lifetime (Typ.)	50,000 Hrs	
	Operation Hours	18Hrs	
	Orientation	Landscape & Portrait	
	Connectivity	Input	HDMI (2), DVI-D, RGB, Audio in, USB
Output		Audio (Off/Fixed/Variable)	
External Control		RS232C In/out, RJ45 (LAN) In, IR In	
Physical Specification	Bezel Color	Black	
	Bezel Width	11.9 mm (T/L/R), 18 mm (B), 32": 13 mm (T/L/R), 18 mm (B)	
	Monitor Dimension (W x H x D)	55": 1,238 x 714.9 x 54 mm, 49": 1,102.2 x 638.5 x 54 mm, 43": 969.6 x 563.9 x 54 mm, 32": 729.4 x 428.9 x 55.5 mm	
	Weight (Head)	55": 17.5 kg, 49": 14.3 kg, 43": 10.0 kg 32": 5.4 kg	
Environment Conditions	VESA™ Standard Mount Interface	55", 49": 300 x 300 mm 43", 32": 200 x 200 mm	
	Operation Temperature	0°C to 40°C	
Power	Operation Humidity	10% to 80%	
	Power Supply	100-240V~, 50/60Hz	
	Power Type	Built-In Power	
	Power Consumption	Typ.	55": 65 W, 49": 60 W, 43": 55 W, 32": 45 W
Smart Energy Saving		55": 45.5 W, 49": 42 W, 43": 38.5 W, 32": 31.5 W	
Standard (Certification)	Safety	IEC 60950-1 / EN 60950-1 / UL 60950-1	
	EMC	FCC Class "A" / CE / KC	
	ErP / Energy Star	Yes ¹⁾ / Yes (Energy Star 7.0)	
Media Player Compatibility	OPS Type Compatible	Yes	
	External Media Player Attachable	Yes	

* Specifications are subject to change without notice

SM3B

Panel	Screen Size	22"	
	Panel Technology	IPS	
	Aspect Ratio	16 : 9	
	Native Resolution	1,920 x 1,080 (FHD)	
	Brightness (Typ.)	250 cd/m ²	
	Viewing Angle (H x V)	178 x 178	
	Surface Treatment	AGP Haze 1%	
	Lifetime (Typ.)	30,000 Hrs	
	Operation Hours	16Hrs	
	Orientation	Landscape	
	Connectivity	Input	HDMI, RGB, Audio, USB
Output		-	
External Control		RS232C In, RJ45 (LAN) In, IR In (Built-in Type), Pixel Sensor In	
Physical Specification	Bezel Color	Black	
	Bezel Width	16.3 mm (Even)	
	Monitor Dimension (W x H x D)	510.3 x 302.1 x 53.8 mm	
	Weight (Head)	3.6 kg	
Environment Conditions	VESA™ Standard Mount Interface	100 x 100 mm	
	Operation Temperature	0°C to 40°C	
Power	Operation Humidity	10% to 80%	
	Power Supply	100-240V~, 50/60Hz	
	Power Type	Built-In Power	
	Power Consumption	Typ.	35 W
Smart Energy Saving		29.76 W	
Standard (Certification)	Safety	UL / cUL / CB / TUV	
	EMC	FCC Class "A" / CE	
	ErP / Energy Star	N/A / No	
Media Player Compatibility	OPS Type Compatible	No	
	External Media Player Attachable	No	

1) EU ErP: N/A




MEDIA PLAYER (WP400)

The User-Friendly Smart Signage Platform

The enhanced user-friendly LG Smart Signage Platform is attached to existing LG digital signages and upgrades them regardless of their original platform. It can execute several tasks at once while providing smooth content playback, and provides an excellent user experience with an intuitive menu and convenient features.


Upgrade to the webOS 4.0 Smart Signage Platform

The WP400 may be applied towards any type of LG digital signages regardless of its platform. The webOS box provides user-friendly smart functions with dedicated menus essential for business use. This way, users are able to easily manage and distribute content or develop web-based applications for multiple signages simultaneously. Moreover, the WP400 has expanded its versatile ability to control displays.

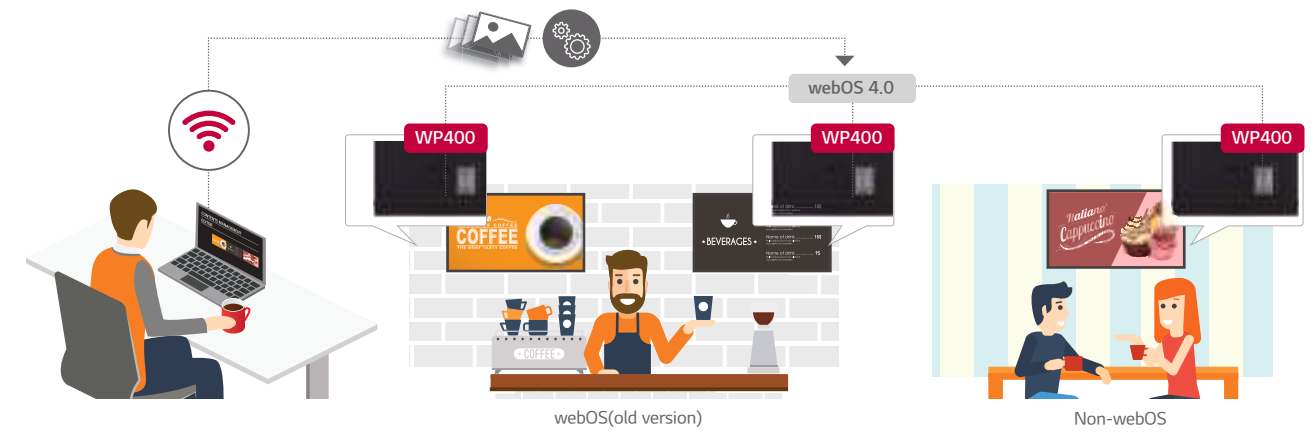


UHD Video Playback Supported

The WP400 supports Ultra HD high-quality video playback which delivers true-to-life color details, with four times higher definition than FHD. Only a single webOS box is required for this superior picture quality.

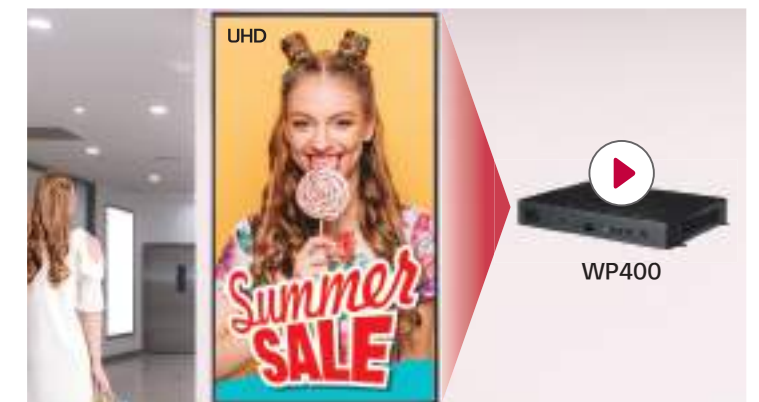


Multi Video Tags

Several different videos can be played at the same time using the multi video tags* feature. This gives you greater flexibility to organize and deploy content when various content items need to be delivered simultaneously via web apps.

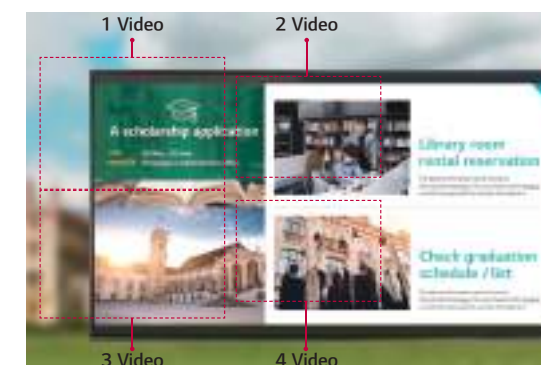

Multi Screen with PBP/PIP

PBP (Picture-By-Picture) features multi screen in a single display with up to 4 input sources while PIP (Picture-In-Picture) supports playing both main screen and sub screen at the same time with various layouts. This gives great flexibility to allocate space for each content.

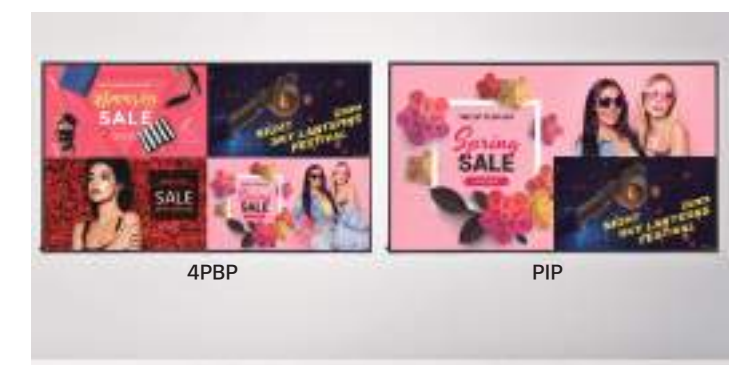

* Models may vary by region. Check with local sales for availability.

Compatibility with LG SuperSign Solutions

LG SuperSign is a comprehensive and indispensable software solution for the integrated management of LG digital signages. With SuperSign, content creation and distribution gets easier and centralized monitoring and control becomes simpler, helping your business save time and operate more effectively across different locations.



Real-Time Remote Care Service

The maintenance gets easier and faster with an optional service Signage 365 Care*, a cloud service solution provided by LG service. It remotely manages status of displays in client workplaces for fault diagnosis and remote-control services, ensuring the stable operation of a client's business.



*The availability of "Signage 365 Care" service can differ by region, so please contact the LG sales representative in your region for further details.



Media Player WP400

- LG webOS 4.0 Smart Signage Platform
- Ultra HD Video Playback
- Intuitive UX Dedicated for Digital Signage
- Embedded CMS
- Compatibility with LG SuperSign Solution and Signage 365 Care

* Specifications are subject to change without notice

WP400

Connectivity	Input	HDMI (2), DP, USB 2.0 (2)
	Output	HDMI, DP (Daisy Chain Only)
	External Control	RS232C In/out, RJ45 In, IR In
Mechanical Specification	Player Dimension (W x H x D)	258 x 36.5 x 186.8 mm
	Weight	1.4 kg
	Carton Dimensions (W x H x D)	314 x 124 x 359 mm
	Packed Weight	2.26 kg
Key feature (Hardware)	Internal Memory 8GB (System 4GB, Available 4GB), Wi-Fi Built-in (ac combo), Thermal Sensor, Power Indicator, Local Key Operation	
Key feature (Software)	webOS ver.	webOS 4.0
	Embedded CMS	USB Auto Playback, Local Contents Scheduling, Group Manager
	Fail Over	○
	Image Customization	No Signal
	Content Sync.	RS-232C, Local Network
	Multi-screen	PIP/PBP(4)
	Screen Share	○
	Video Tag	○ (2) ¹⁾
	Play via URL	○
	OSD Rotation	○
	Lock mode	○ (Home Dashboard, USB, OSD, IR Operation, Local Key, WiFi, SoftAP, Screen Share)
	Content Rotation	○
	Gapless Playback	○
	Tile Mode Setting	○ (Max. 15x15)
	Setting Data Cloning	○ (RS-232C, Network, USB)
	Firmware Update by Network	○
	SNMP(ver.2)	○
	ISM Mode (Image Sticking Minimization)	○
	Status Mailing	○
	Control Manager	○
	Power Mgmt.	DPM, On/Off Schedule, Holiday Schedule, Power on Status, Smart Energy Saving, Wake on LAN, Power on Delay
	Daylight Saving Time	○
	Beacon	○
	HDMI-CEC ²⁾	○
	SI Server Setting	○
	webRTC	○
	Environment Conditions	Operation Temperature
Operation Humidity		10% to 80%
Power	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
	Power Consumption	16 W / 22 W 54.6 W
Certification	Safety	CB
	EMC	CE Class A
Software Compatibility ³⁾	Content Management Software	SuperSign CMS
	Control and Monitoring Software	SuperSign Control/Control+
Accessories	Basic	Remote Controller, Power Cord, QSG, HDMI Cable, Regulation Book, Phone to RS232C Gender

1) The 2 video tags may expand to 4 video tags in the 3Q of 2019.
 2) Compatibility may differ by equipment.
 3) Software compatibility may change over time. Please contact LG sales representative for details.




LG TV Signage (Smart TV Signage)

Live TV and Advertisements on One Screen

Smart TV Signage enables both TV broadcasting and promotional display in one screen via a built-in TV tuner. With Smart TV Signage, managers can efficiently and timely deliver messages / promotion while customers enjoy watching live TV simultaneously.

Embedded Content Management & Group Management

Play and customize video content, schedule a playlist, and even group and control signages via remote control, mouse or even phone with the embedded Content Management & Group Management System. There's no need for a separate PC or software, making content management much easier and user-friendly.

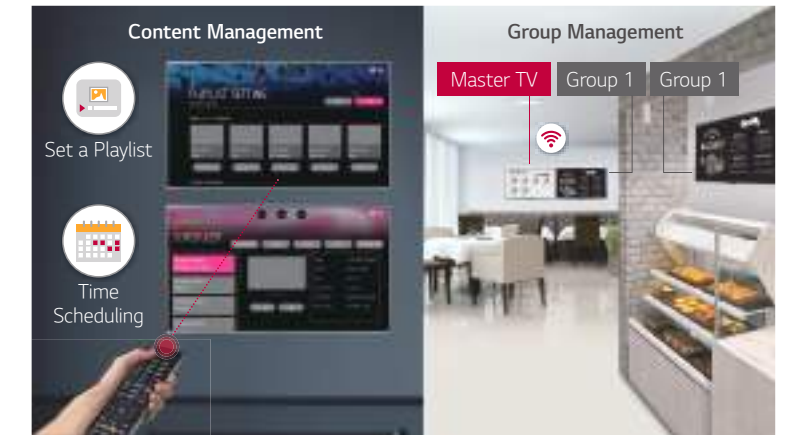

USB Data Cloning

USB data cloning makes managing multiple displays more efficient for optimal operation. No need to set up each display one by one, data can be copied to a USB in one display, data will be distributed to other displays through a USB plug-in.



RTC

Save time and improve convenience with RTC (Real Time Clock). Even when the TV is off, time information is stored on the RTC module via an internal memory, so there is no need to sync time processes.



NTP

With NTP (Network Time Protocol), the TV receives real time updates from the network and synchronizes its time accordingly.



* Models may vary by region. Check with local sales for availability.



webOS
UT640S (86" / 75" / 65" / 55" / 49" / 43")

- Ultra HD
- Embedded CMS (Content management, group management)
- SuperSign SW compatibility (CMS, Control/Control+, LG simple editor)
- Crestron connected® (Network based control)
- Pre-loaded Youtube apps

* Specifications are subject to change without notice and may differ by countries.

UT640S

Display	Diagonal Size	86" / 75" / 65" / 55" / 49" / 43"
	Resolution	3,840 x 2,160 (4K UHD)
	Brightness	300 cd/m ² (43"), 400 cd/m ² (49", 55", 65"), 350 cd/m ² (75", 86")
	Viewing Angle (H x V)	178 x 178
Broadcasting System	Analog	PAL/SECAM
	Digital	Varied by Countries
Video	Picture Engine	XD Engine
	Aspect Ratio	5 Modes (16:9, Original, 4:3, Vertical Zoom, All Directional Zoom)
Audio	Audio Output / Speaker System	10W + 10W / 2.0 ch
	Sound Mode	Yes (6 Modes)
	Clear Voice	Yes (Clear Voice III)
Smart Features	Smart UX	webOS 4.0, Smart Home, Web Browser, Pre-loaded YouTube Apps
	Connectivity	Soft AP, Wi-Fi (ac), Screen Share (Miracast), DIAL, Bluetooth Audio Playback, LG Sound Sync/Bluetooth, Mobile Connection Overlay, Music Player
Hospitality Features		Hotel Mode, Lock Mode (Limited), One Channel Map, Welcome Screen, Insert Image, RJP Interface, RJP Compatibility, Time Scheduler, Crestron Connected® (Network Based Control), DPM, Embedded Content Manager/Group Manager, RTC, NTP Sync Timer
General Features		USB Cloning, WOL (Magic Packet Only), SNMP, Diagnostics, HTNG-CEC (1.4), HDMI-CEC (1.4), IR Out, Multi IR Code, BEACON, Auto Off / Sleep Timer, Smart Energy Saving, Motion Eye Care
Interface	Side	HDMI In (2), USB, CI Slot
	Rear	RF In, Digital Audio Out, HDMI/HDCP Input 2.0, RS-232C (Phone Jack Type, Control & Service), External Speaker Out, RJ45, Debug (Phone Jack Type)
Dimension	Vesa	600 x 400 mm (86", 75"), 300 x 300 mm (65", 55", 49"), 200 x 200 mm (43")
	W x H x D / Weight (with stand)	86": 1,943 x 1,188 x 345 / 45.0 Kg, 75": 1,693 x 1,048 x 345 / 35.4 Kg, 65": 1,463 x 914 x 269 / 21.6 Kg, 55": 1,244 x 786 x 231 / 14.5 Kg, 49": 1,110 x 709 x 231 / 11.3 Kg, 43": 973 x 623 x 216 / 8.1 Kg,
Power (Unit : Watts)	Voltage, Hz	100 - 240V, 50/60Hz
	Typical	86" : 301 W, 75" : 221 W, 65" : 181.6 W, 55" : 145 W, 49" : 104 W, 43" : 99.1 W